

# Castalia

A four-channel electrochemical sensing SoC with a five-hart RISC-V back end

Maxx Seminario

University of Nebraska–Lincoln

September 21, 2026

# Where cancers are caught, and whether anyone looks

Castalia

Maxx Seminario

Target application

The chip

Analog front end

Operating modes

Analog blocks

Digital


Vision

Against Moshkin and the field

From currents to a score

References

Backup

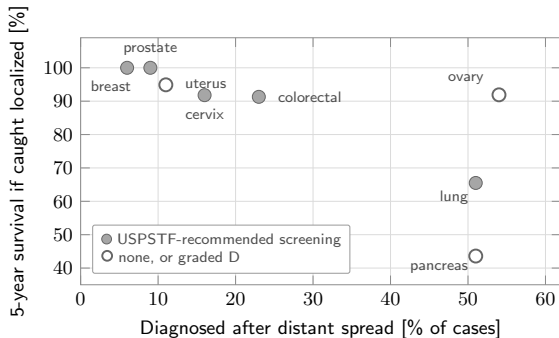

[1] SEER 21, 2016–2022; [2, 3] USPSTF

# Why ovarian: late, lethal, and unscreened

Castalia

Maxx Seminario

Target application

The chip

Analog front end

Operating modes

Analog blocks

Digital


Vision

Against Musklin and the field

From currents to a team

References

Backup

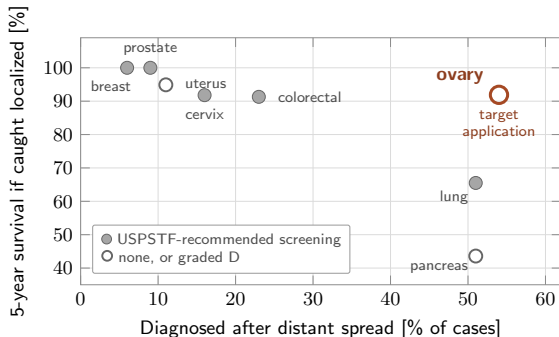

| Site       | Distant at dx | Deaths/100 cases | Screening (USPSTF) |
|------------|---------------|------------------|--------------------|
| Ovary      | 54 %          | 59               | D                  |
| Pancreas   | 51 %          | 78               | D                  |
| Lung       | 51 %          | 54               | B, LDCT            |
| Colorectal | 23 %          | 35               | A                  |
| Cervix     | 16 %          | 31               | A                  |
| Uterus     | 11 %          | 21               | none               |
| Prostate   | 9 %           | 11               | C, PSA             |
| Breast     | 6 %           | 13               | B                  |

USPSTF: A/B recommended; C offered selectively; D recommended *against*; none: no statement [7].

[1] SEER, 2026 estimates; [2, 3] USPSTF

Most lethal gynecologic cancer [1]: 92 % survivable if caught localized, yet 54 % present after spread, and screening is graded D [2]. UKCTOCS moved stage, not mortality [4].

# One serum aliquot, four sites, one score

Castalia

Maxx Seminario

Target application

The chip

Analog front end

Operating modes

Analog blocks

Digital


Vision

Against Moshkin and the field

From currents to a score

References

Backup

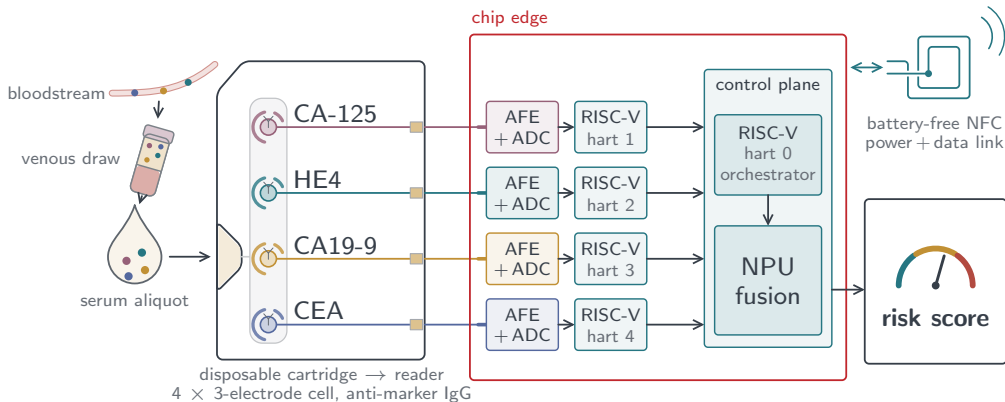

**Symptomatic-patient triage on a disposable four-site cartridge; four markers read at the same instant, fused on chip.**

# No single marker is a test; four fused are [5]

Castalia

Maxx Seminario

Target application

The chip

Analog front end

Operating modes

Analog blocks

Digital


Vision

Against Moshkin and the field

From currents to a score

References

Backup

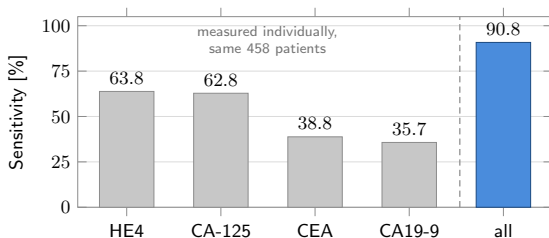

| Marker | Molecule                          | Cut-off   |
|--------|-----------------------------------|-----------|
| CA-125 | MUC16 mucin epitope [8]           | 35 U/mL   |
| HE4    | WFDC2 glycoprotein [6]            | 70 pmol/L |
| CA19-9 | sialyl-Lewis <sup>a</sup> antigen | 37 U/mL   |
| CEA    | CEACAM5 glycoprotein              | 5 ng/mL   |

Each marker covers a subtype the others miss. The decision is a learned combination, so the chip is four channels plus the processor that fuses them.

# Block diagram

Castalia

Maxx Seminario

Target application

The chip

Analog front end

Operating modes

Analog blocks

Digital


Vision

Against Mwaniki and the field

From currents to vision

References

Backup

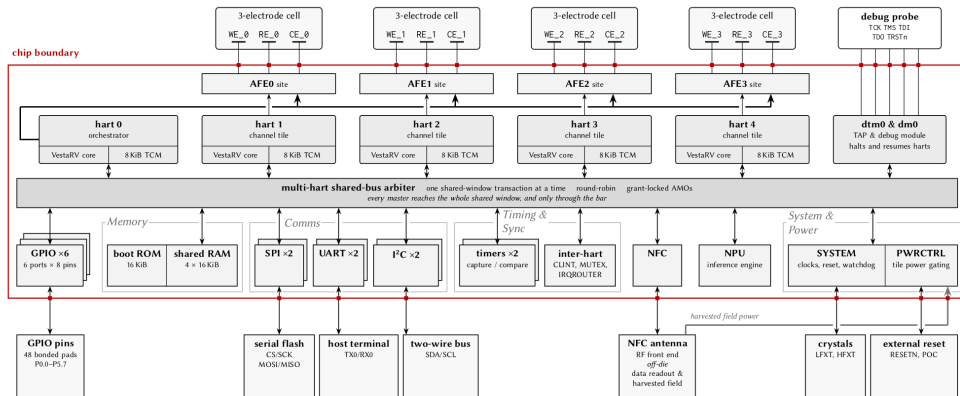

Four channel tiles own four AFE sites; every master reaches ROM, RAM, NPU and peripherals only through the arbiter.

# Physical implementation

Castalia

Maxx Seminario

Target  
application

The chip

Analog front end

Operating modes

Analog blocks

Digital

Vision

Against Myshkin  
and the field

From currents to  
a score

References

Backup

**ARTWORK PENDING**



**ARTWORK  
PENDING**



# Grounded-WE two-amplifier potentiostat

Castalia

Maxx Seminario

Target application

The chip

Analog front end

Operating modes

Analog blocks

Digital


Vision

Against Moshkin and the field

From currents to a score

References

Backup

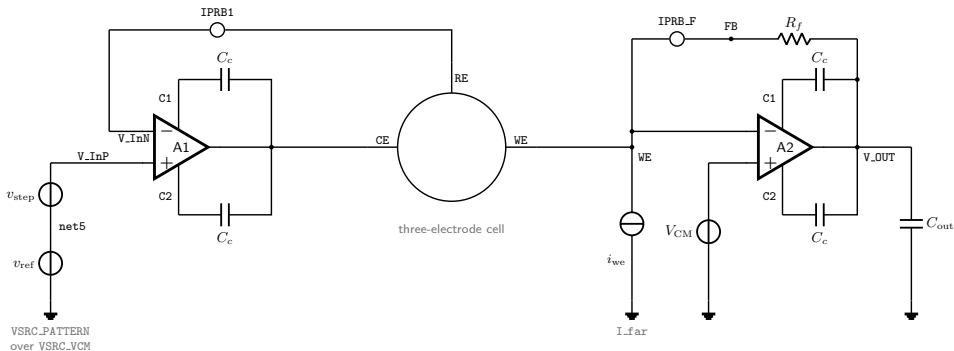

**A1 drives CE with RE in feedback; A2 holds WE at  $v_{cm}$  through  $R_f$ .  $v_{out} = v_{cm} - I_{we}R_f$ , both polarities.**



# Analog top level

Castalia

Maxx Seminario

Target  
application

The chip

Analog front end

Operating modes

Analog blocks

Digital

Vision

Against Moshkin  
and the field

From currents to  
a score

References

Backup

**ARTWORK PENDING**



Virtuoso export of the analog top level: four channels, shared bias, test bus

# The electrode model, in Verilog-A

Castalia

Maxx Seminario

Target application

The chip

Analog front end

Operating modes

Analog blocks

Digital


Vision

Against Munkin and the field

From currents to a scan

References

Backup



$R_u, R_{ce}, C_{dl}$  lumped; the faradaic branch  $Z_f$  is the Verilog-A element.

$i_f$  faradaic current  
 $\eta$  overpotential,  $E - E^{0'}$   
 $f$   $F/RT$   
 $C_{O,R}(0, t)$  surface conc. of O, R  
 $C^*$  bulk conc.  
 $\delta$  Nernst layer

Kinetics  $i_f = nFAk^0 [C_R(0, t) e^{(1-\alpha)nf\eta} - C_O(0, t) e^{-\alpha nf\eta}]$   
 Transport  $\partial C / \partial t = D \partial^2 C / \partial x^2$ , finite-volume, 28 expanding slabs per species  
 Boundaries flux  $= \pm i_f / nFA$  at the surface;  $C(\delta, t) = C^*$  at the Nernst layer

| Parameter | Symbol   | Default             | Unit                        | Quantity                             |
|-----------|----------|---------------------|-----------------------------|--------------------------------------|
| E0        | $E^{0'}$ | 0.0                 | V                           | formal potential of the couple       |
| nel       | $n$      | 1                   | —                           | electrons transferred                |
| alpha     | $\alpha$ | 0.5                 | —                           | transfer coefficient                 |
| k0        | $k^0$    | 0.1                 | $\text{cm s}^{-1}$          | standard heterogeneous rate constant |
| Dif       | $D$      | $5 \times 10^{-6}$  | $\text{cm}^2 \text{s}^{-1}$ | diffusion coefficient, both species  |
| Area      | $A$      | 0.01                | $\text{cm}^2$               | electrode area                       |
| Cox       | $C_O^*$  | $1 \times 10^{-6}$  | $\text{mol cm}^{-3}$        | bulk concentration, oxidised species |
| Cred      | $C_R^*$  | 0                   | $\text{mol cm}^{-3}$        | bulk concentration, reduced species  |
| Temp      | $T$      | 298.15              | K                           | interface temperature                |
| expmax    | —        | 40                  | —                           | exponent clamp on the kinetic terms  |
| gpar      | —        | $1 \times 10^{-15}$ | S                           | DC shunt across the terminals        |

Equations: Bard–Faulkner [13]. Discretisation: Britz–Strutwolf, Feldberg [17, 18]. Precedent for Verilog-A electrode co-simulation: Jog et al. [19].

# Emulating the four markers

Castalia

Maxx Seminario

Target application

The chip

Analog front end

Operating modes

Analog blocks

Digital

Vision

Against Mushkin and the field

From currents to a score

References

Backup

| Marker | Reporter       | $E^{0'}$ (V) | Peak (nA) | $C_R^*$ ( $\mu$ M) | Cut-off         |
|--------|----------------|--------------|-----------|--------------------|-----------------|
| CA-125 | methylene blue | -0.15        | 856       | 279                | 35 U/mL [5, 8]  |
| HE4    | ferrocene      | +0.10        | 1311      | 394                | 70 pmol/L [6]   |
| CA19-9 | TMB / HRP [20] | +0.25        | 1659      | 458                | 37 U/mL [5]     |
| CEA    | anthraquinone  | +0.40        | 939       | 303                | 5 ng/mL [5, 14] |

$E^{0'}$  reporter formal potential, i.e. peak position; chosen in the  $-0.6$  to  $+0.4$  V window [22, 23], 150–250 mV apart, not measured per reporter

Peak inside 50 nA to 5  $\mu$ A on screen-printed electrodes [14, 15, 21];  $C_R^*$  fitted to reach it

$k^0$  0.1 cm/s, reversible; nothing published on carbon for these markers

Shared  $\alpha = 0.5$ ,  $n = 1$ ,  $D = 5 \times 10^{-6}$  cm<sup>2</sup>/s,  $A = 0.01$  cm<sup>2</sup>, 37 °C,  $R_f = 560$  k $\Omega$

**Representative values, not marker-measured: these slides demonstrate the channel, not an assay.**

# Channel range, assay range, and where the panel was placed

Castalia

Maxx Seminario

Target application

The chip

Analog front end

Operating modes

Analog blocks

Digital



Vision

Against Moshkin and the field

From currents to a score

References

Backup

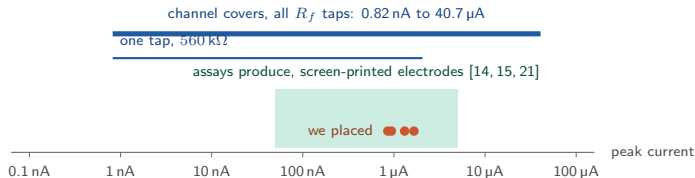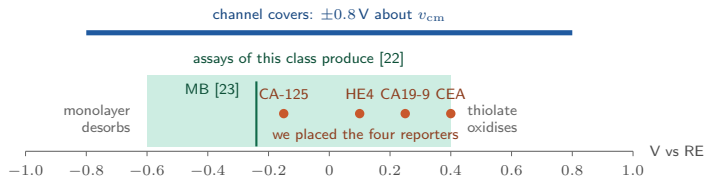

Potentials: spaced 150–250 mV for one-sweep resolution inside the reporter window, not per-reporter values. Peak heights: inside the published envelope and one tap's full scale, then  $C_R^*$  fitted. Silicon is unaffected: the channel covers the assay band with 0.2–0.4 V and a decade of current to spare, so moving the dots changes what the simulation shows, not what the chip can measure.

# Exercising the cell: differential-pulse voltammetry

Castalia

Maxx Seminario

Target application

The chip

Analog front end

Operating modes

Analog blocks

Digital



Vision

Against Moshkin and the field

From currents to a trace

References

Backup

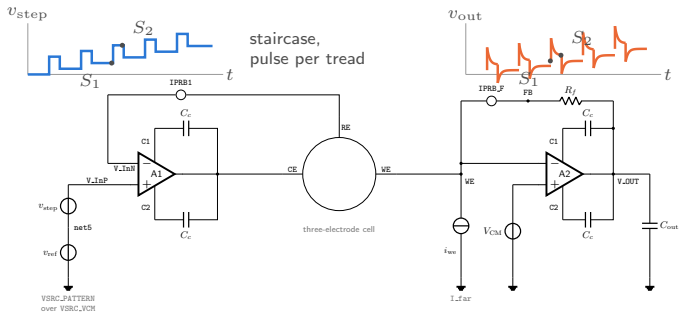

firmware, per tread:  
 $\Delta I = I(S_2) - I(S_1)$  against  $E$   
 one peak per marker

Excite

DAC: staircase with a pulse on every tread, applied at RE by A1

Sense

$$v_{out} = v_{cm} - i_{WE} R_f$$

Sample

SAR at  $S_1$  (before the pulse) and  $S_2$  (end of the pulse), once charging has decayed

Resolve

firmware:  $\Delta I = I(S_2) - I(S_1)$  vs  $E$ ; peak position: marker, peak height: concentration

# Four markers resolved in one differential-pulse sweep

Castalia

Maxx Seminario

Target application

The chip

Analog front end

Operating modes

Analog blocks

Digital


Vision

Against Moshkin and the field

From currents to a score

References

Backup

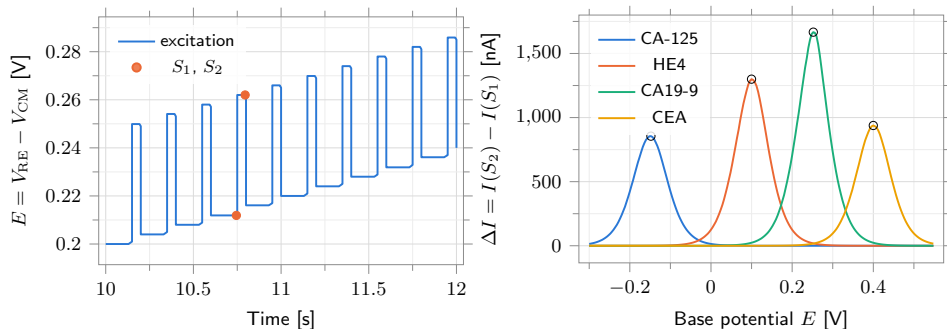

\*schematic sim

**Peak position identifies the reporter, peak height carries concentration. Apexes within 2 mV and 1 % of the assay targets; blank below 1 pA.**

# Every clinical cut-off lands inside the channel window

Castalia

Maxx Seminario

Target application

The chip

Analog front end

Operating modes

Analog blocks

Digital


Vision

Against Moshkin and the field

From currents to a score

References

Backup

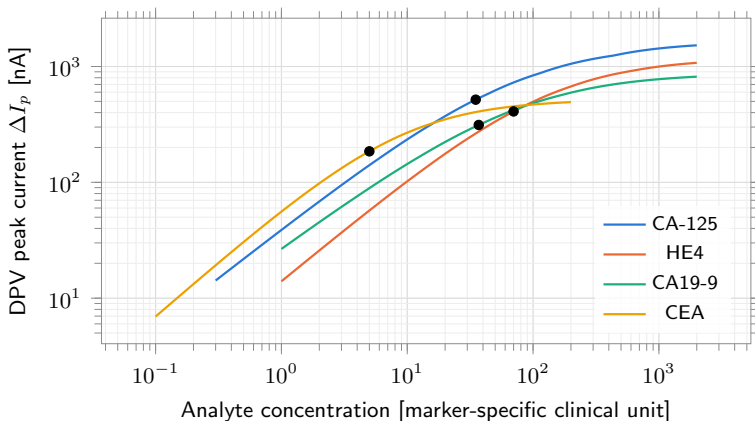

\*schematic sim

CA-125 35 U/mL, HE4 70 pmol/L, CA19-9 37 U/mL, CEA 5 ng/mL: all four on the steep part of the curve at one  $R_f$  setting.

# Cyclic voltammetry through the assembled channel

Castalia

Maxx Seminario

Target  
application

The chip

Analog front end

Operating modes

Analog blocks

Digital


Vision

Against Moshkin  
and the field

From currents to  
a score

References

Backup

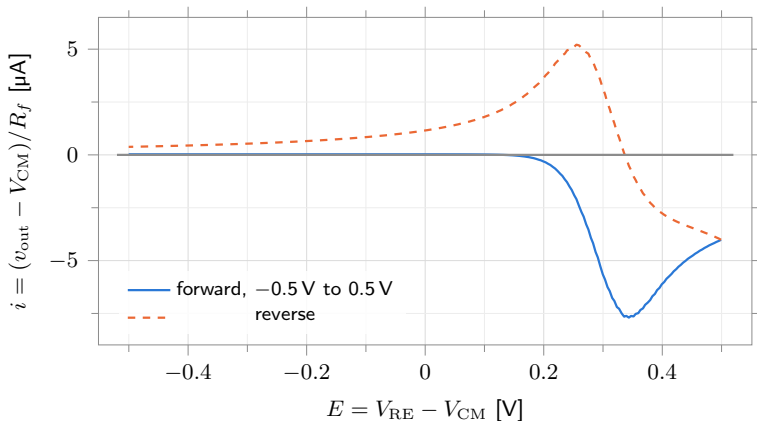

\*schematic sim

Staircase potential from the on-chip DAC, current digitised by the on-chip SAR, unclipped over the sweep.



# Why impedance: for electrodes that stay in

Castalia

Maxx Seminario

Target application

The chip

Analog front end

Operating modes

Analog blocks

Digital

Vision

Against Muskhin and the field

From currents to impedances

References

Backup

|               | Cartridge (today)                                                                                                                       | Wearable                                                                    | Implant                                          |
|---------------|-----------------------------------------------------------------------------------------------------------------------------------------|-----------------------------------------------------------------------------|--------------------------------------------------|
| Sample        | serum, minutes                                                                                                                          | wound exudate, ISF, sweat; days                                             | whole blood or ISF; weeks                        |
| Chemistry     | single-shot sandwich immunoassay                                                                                                        | reagentless receptors: aptamer (E-AB) or direct small-molecule redox        | the same, under a foreign-body response          |
| Electrode     | used once                                                                                                                               | drifts: monolayer desorption and fouling, 50 % baseline over hours [24, 25] | fouls faster; antifouling coatings buy time [26] |
| What helps    | –                                                                                                                                       | differential readout; knowing the electrode's state                         | the same, plus knowing when it is gone           |
| EIS gives     | the fouling arc, $R_{ct} \parallel C_{dl}$ at 0.02–160 Hz, per site, from the same channel: an electrode's state, trended over its life |                                                                             |                                                  |
| Firmware does | compares to the electrode's own baseline, triggers re-ranging and recalibration, retires a dead site                                    |                                                                             |                                                  |
| It cannot     | fix the chemistry: drift is systematic, and averaging removes noise, not bias [25]                                                      |                                                                             |                                                  |

# How impedance is measured: the same loop, no extra hardware

Castalia

Maxx Seminario

Target application

The chip

Analog front end

Operating modes

Analog blocks

Digital


Vision

Against Moshkin and the field

From currents to a score

References

Backup

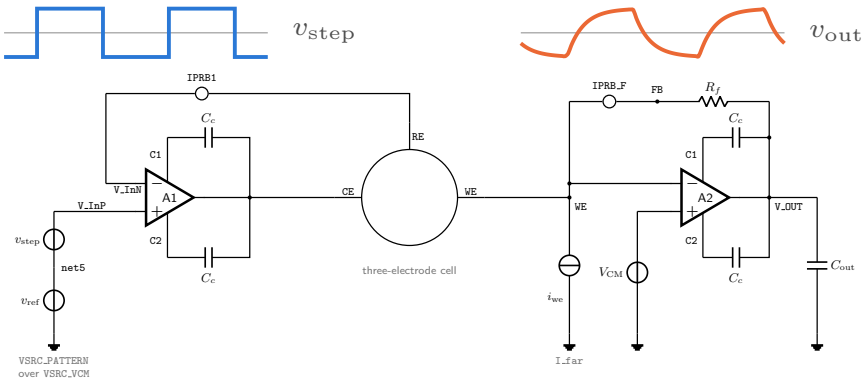

Excite  
Sense  
Digitise  
Solve

DAC: a small two-code square about the DC setpoint  $v_{ref}$   
 $v_P$  across the cell;  $i_{WE} = -v_{out}/R_f$   
 the SAR records both; firmware I/Q demodulation  
 $\hat{Z} = -R_f \hat{V}_P / \hat{V}_{OUT}$ , or a ratio to  $Z_{cal}$

# Magnitude and phase from codes: I/Q demodulation

Castalia

Maxx Seminario

Target  
application

The chip

Analog front end

Operating modes

Analog blocks

Digital

Vision


Against Mvshkin  
and the field

From currents to  
a score


References

Backup

record  $c_n$ ,  $N$  per period,  $M$  periods



$$I = \frac{2}{MN} \sum c_n \cos \frac{2\pi n}{N}$$
$$Q = \frac{2}{MN} \sum c_n \sin \frac{2\pi n}{N}$$



Records  $v_P$  and  $v_{out}$   
Divide  $\hat{Z} = -R_f \hat{V}_P / \hat{V}_{OUT}$   
Ratio against  $Z_{cal}$ :  $R_f$  drops out

# The four loads behind the EIS plots

Castalia

Maxx Seminario

Target application

The chip

Analog front end

Operating modes

Analog blocks

Digital


Vision

Against Moshkin and the field

From currents to a trace

References

Backup

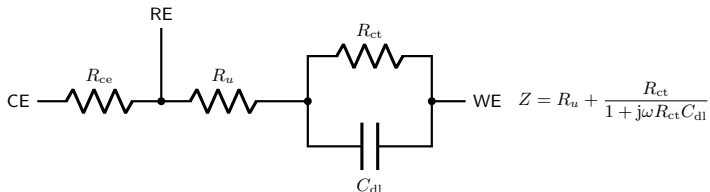

| Load     | $R_{ct}$       | $C_{dl}$   | Gain code | Stands for                                                                                            |
|----------|----------------|------------|-----------|-------------------------------------------------------------------------------------------------------|
| resistor | –              | –          | $N = 0$   | an 11 k $\Omega$ resistor in place of the cell: no interface, so the trace is the channel's own error |
| fouled   | 10 k $\Omega$  | 10 $\mu$ F | $N = 0$   | a degraded electrode: adsorbed protein and biofilm open leakage paths and enlarge the interface       |
| typical  | 100 k $\Omega$ | 1 $\mu$ F  | $N = 20$  | an electrode in use                                                                                   |
| fresh    | 1 M $\Omega$   | 100 nF     | $N = 63$  | a new, clean surface                                                                                  |

$R_u = R_{ce} = 1 \text{ k}\Omega$  throughout. Fouling:  $R_{ct}$  falls and  $C_{dl}$  rises through an electrode's life; tracking that drift is what EIS is for here.

# Impedance spectroscopy on the same channel

Castalia

Maxx Seminario

Target application

The chip

Analog front end

Operating modes

Analog blocks

Digital



Vision

Against Muxkin and the field

From currents to a score

References

Backup

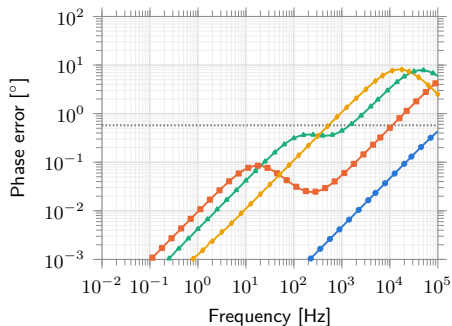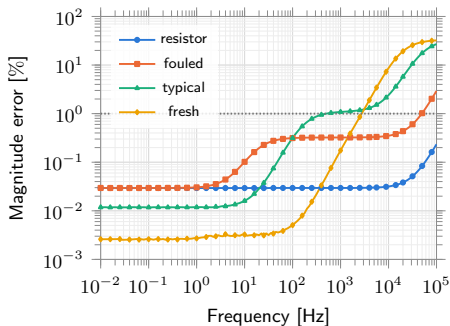

Accuracy  $\pm 1\%$ ,  $\pm 0.6^\circ$  to 5 kHz;  $\pm 5\%$  to 27 kHz. Limit: A1's loop bandwidth  
 Range 246  $\Omega$  to 12.1 M $\Omega$ . Limits: TIA compliance below, one LSB of output above; 320  $R_f$  codes in between

\*schematic sim

The excitation amplitude never enters:  $Z$  is the ratio of two records through one converter, so DAC gain and droop cancel.

# What sets the EIS floor, and what averaging buys

Castalia

Maxx Seminario


**Systematic floor: A2's finite gain, scaled by the noise gain**

$$\varepsilon_{\text{dc}} \approx \frac{1 + R_f/|Z|}{A_{\text{OL}}}$$

| Load     | $ Z _{\text{dc}}$ | $R_f$           | $R_f/ Z $ | Error    |
|----------|-------------------|-----------------|-----------|----------|
| resistor | 11 k $\Omega$     | 19.6 k $\Omega$ | 1.8       | 0.029 %  |
| fouled   | 11 k $\Omega$     | 19.6 k $\Omega$ | 1.8       | 0.030 %  |
| typical  | 101 k $\Omega$    | 140 k $\Omega$  | 1.4       | 0.003 %  |
| fresh    | 1 M $\Omega$      | 397 k $\Omega$  | 0.4       | 0.0007 % |

Set by the gain code, not the electrode; repeatable, so the  $Z_{\text{cal}}$  ratio removes it (next slide). What is left is the random term on the right.

**Random error: front-end noise, averaged**

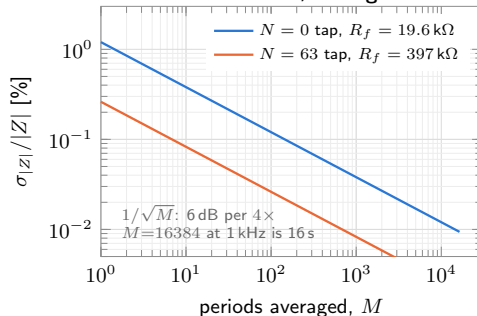

**Bias is set by the gain code and cancels in the ratio; precision is bought with measurement time,  $\sigma \propto 1/\sqrt{M}$ .**

# Calibrating impedance: what cancels, and what a 20 % poly costs

$$\hat{Z} = Z_{\text{cal}} \frac{(\hat{V}_P / \hat{V}_{\text{OUT}})}{(\hat{V}_P / \hat{V}_{\text{OUT}})_{\text{cal}}} \quad \text{same gain code, same frequency, same converter}$$

|             | On-chip $Z_{\text{cal}}$ (per decade, muxed in)                                 | Off-chip standard (at test)          |
|-------------|---------------------------------------------------------------------------------|--------------------------------------|
| Cancels     | $R_f$ , its pole, the DAC, the LSB, A2's gain floor                             | the same                             |
| Value known | to the poly's chip-to-chip spread, $\sim 20\%$                                  | to the standard, $< 0.1\%$           |
| When        | any time, in the field, before every point                                      | once per chip, stored in flash       |
| Tracks      | temperature and ageing, since $Z_{\text{cal}}$ and $R_f$ are the same poly      | the channel on the day it was tested |
| Good for    | trends: fouling is a change in one electrode's $Z$ , untouched by a fixed scale | absolute ohms                        |

**The poly need not be accurate, only stable. One off-chip number per chip pins the absolute scale; the on-chip ratio carries it through temperature and time.**

# The class-AB amplifier: one cell, both roles

Castalia

Maxx Seminario

Target application

The chip

Analog front end

Operating modes

Analog blocks

Digital


Vision

Against Mvshkin and the field

From currents to a score

References

Backup

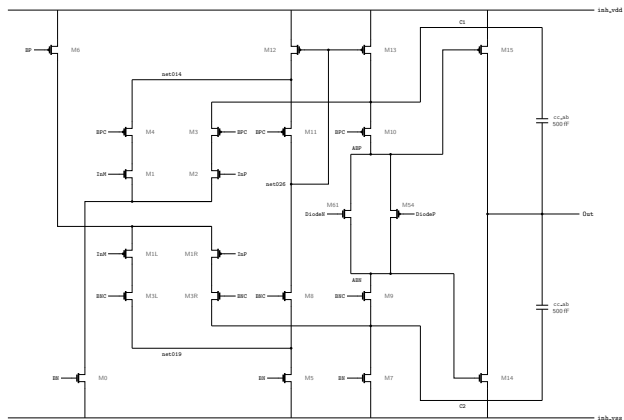

complementary  
input pairs and  
their cascodes

diode-connected  
summing branch

class-AB  
drive

output

testbench  
compensation



# Bipolar accuracy through zero

Castalia

Maxx Seminario

Target application

The chip

Analog front end

Operating modes

Analog blocks

Digital


Vision

Against Mvshkin and the field

From currents to a score

References

Backup

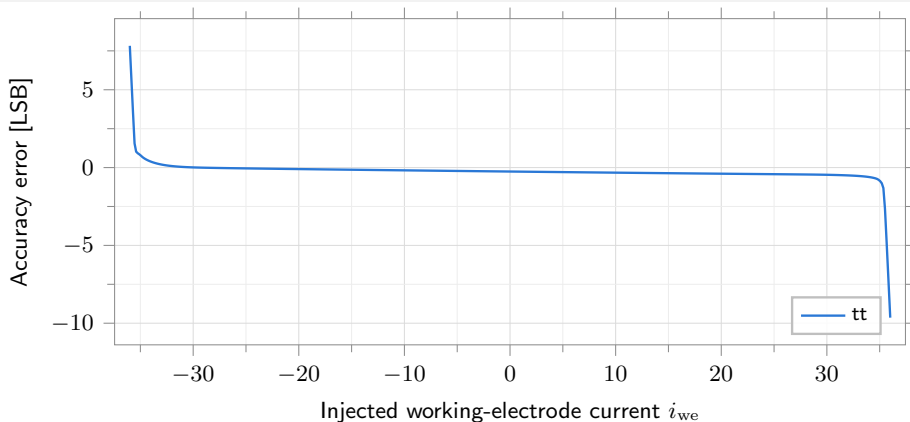

\*schematic sim

**No kink at the crossing: class-AB output, no dead zone. This is the measurement rev-1's PMOS mirror could not make.**

# Programmable feedback resistor: one string, 320 codes

Castalia

Maxx Seminario

Target application

The chip

Analog front end

Operating modes

Analog blocks

Digital


Vision

Against Muskhin and the field

From currents to a score

References

Backup

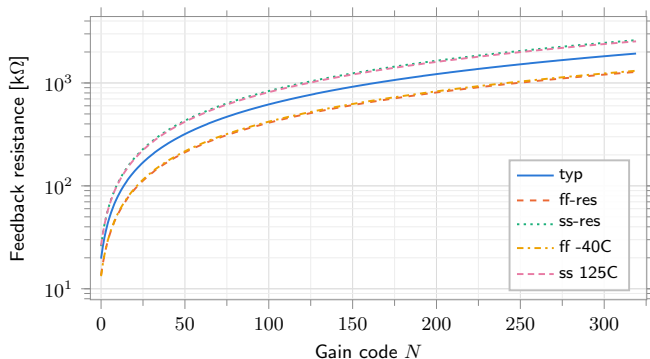

$$R_f = 18 \text{ k}\Omega + 6 \text{ k}\Omega \cdot N$$

| $N$        | $R_f$   | Full scale |
|------------|---------|------------|
| 0          | 19.6 kΩ | ±40.7 μA   |
| 63         | 397 kΩ  | ±2.02 μA   |
| 319        | 1.93 MΩ | ±0.41 μA   |
| LSB at 319 |         | 0.824 nA   |

**Strictly monotonic at every corner, including the four thermometer seams. Maximum gain is noise-limited, not quantisation-limited.**

# 10-bit SAR ADC, extracted netlist

Castalia

Maxx Seminario

Target application

The chip

Analog front end

Operating modes

Analog blocks

Digital


Vision

Against Moshkin and the field

From currents to a score

References

Backup

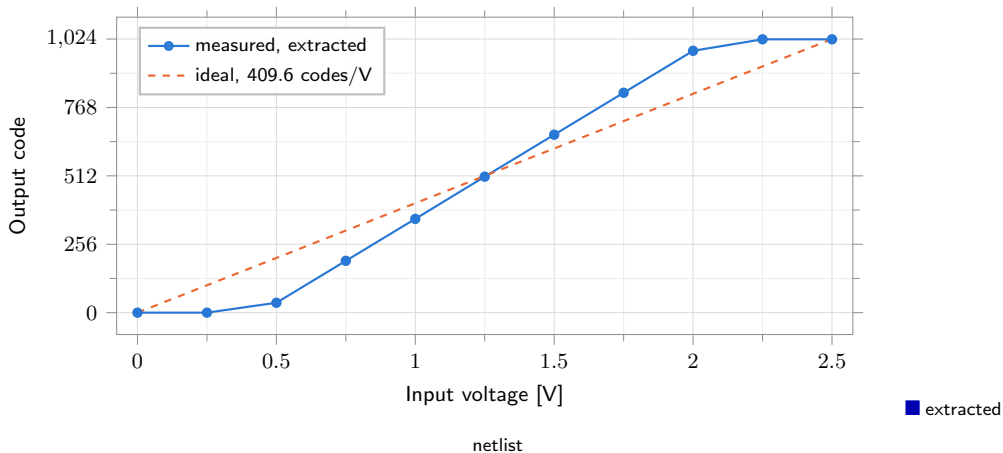

**23 clocks per conversion, 870 kSa/s, 50 pJ. The capacitor array exists only in layout, so this is the one block characterised extracted.**

# Block results: corners, with mismatch $\sigma$

Castalia

Maxx Seminario

Target application

The chip

Analog front end

Operating modes

Analog blocks

Digital

Vision

Against Munkin and the field

From currents to a score

References

Backup

| Parameter                                         | Unit       | tt       | ff       | fs       | sf       | ss       | Spread | $\sigma$ (MC) |
|---------------------------------------------------|------------|----------|----------|----------|----------|----------|--------|---------------|
| <b>Class-AB amplifier (A1 and A2)</b>             |            |          |          |          |          |          |        |               |
| Open-loop gain                                    | dB         | 82.77    | 79.88    | 83.14    | 83.37    | 84.94    | 5.06   | 1.06          |
| Phase margin                                      | deg        | 73.52    | 74.70    | 74.04    | 72.86    | 73.34    | 1.84   | 1.42          |
| Dominant pole                                     | kHz        | 1.592    | 2.286    | 1.538    | 1.494    | 1.225    | 1.061  | 0.276         |
| Gain-bandwidth product                            | MHz        | 22.78    | 23.19    | 22.89    | 22.94    | 22.59    | 0.60   | 3.57          |
| Input offset voltage                              | mV         | 0.622    | 0.649    | 0.624    | 0.569    | 0.456    | 0.193  | 5.201         |
| <b>Programmable feedback resistor<sup>a</sup></b> |            |          |          |          |          |          |        |               |
| $R$ at $N=0$                                      | k $\Omega$ | 19.64    | —        | —        | —        | —        | —      | 0.071         |
| $R$ at $N=319$                                    | M $\Omega$ | 1.931    | —        | —        | —        | —        | —      | 0.0007        |
| Seam step 63 $\rightarrow$ 64                     | k $\Omega$ | 7.42     | —        | —        | —        | —        | —      | 0.504         |
| <b>10-bit SAR ADC, extracted<sup>b</sup></b>      |            |          |          |          |          |          |        |               |
| Fitted slope                                      | codes/V    | 628.59   | 628.59   | 628.40   | 628.73   | 628.13   | 0.60   | —             |
| Effective LSB                                     | mV         | 1.5909   | 1.5909   | 1.5914   | 1.5905   | 1.5920   | 0.0015 | —             |
| Input at code 0                                   | V          | 0.4408   | 0.4408   | 0.4407   | 0.4408   | 0.4399   | 0.0009 | —             |
| Usable span                                       | V          | 1.6274   | 1.6274   | 1.6280   | 1.6271   | 1.6286   | 0.0015 | —             |
| Worst residual                                    | LSB        | 0.495    | 0.495    | 0.490    | 0.477    | 0.484    | 0.018  | —             |
| RMS residual                                      | LSB        | 0.294    | 0.294    | 0.277    | 0.288    | 0.302    | 0.025  | —             |
| Analog supply current                             | $\mu$ A    | 6.36     | 4.79     | 5.45     | 8.44     | 15.43    | 10.64  | —             |
| Energy per conversion                             | pJ         | 20.8     | 19.3     | 18.1     | 27.3     | 49.5     | 31.4   | —             |
| <b>12-bit R-2R reference DAC, ideal rail</b>      |            |          |          |          |          |          |        |               |
| Full-scale output                                 | V          | 2.499388 | 2.499388 | 2.499388 | 2.499388 | 2.499388 | 0      | 0.000001      |
| LSB size                                          | $\mu$ V    | 610.351  | 610.351  | 610.351  | 610.351  | 610.351  | 0      | 0.0003        |
| INL, most positive                                | LSB        | 0.113    | 0.101    | 0.100    | 0.127    | 0.130    | 0.030  | 0.610         |
| INL, most negative                                | LSB        | -0.376   | -0.338   | -0.390   | -0.362   | -0.414   | 0.076  | 0.620         |
| DNL, most positive                                | LSB        | 0.002    | 0.001    | 0.002    | 0.002    | 0.002    | 0.000  | 1.128         |
| DNL, most negative                                | LSB        | -0.423   | -0.374   | -0.424   | -0.424   | -0.479   | 0.105  | 1.415         |

$\sigma$ : 200 samples, process + mismatch, nominal corner. Corner runs hold the passive models at typical, so resistor and ladder spreads are lower bounds. <sup>a</sup>The TRM carries  $R_f$  corners as a figure (the  $R_f$  slide), not a table. <sup>b</sup>Extracted netlist; the extraction carries no mismatch statistics, so no  $\sigma$ . Amplifier and DAC: schematic sim\*; SAR: extracted.

# One AFE channel, as simulated

Castalia

Maxx Seminario

Target application

The chip

Analog front end

Operating modes

Analog blocks

Digital

Vision

Against Muskin and the field

From currents to a scan

References

Backup

| Parameter              | Value                                                                  | Condition                                        |
|------------------------|------------------------------------------------------------------------|--------------------------------------------------|
| CE compliance          | 13.2 mV – 2.480 V                                                      | 2.5 V rail, corners                              |
| Cell current delivered | $\pm 52.5 \mu\text{A}$                                                 | 12 k $\Omega$ cell                               |
| TIA compliance         | $\pm 0.80 \text{ V}$ about $v_{\text{cm}}$                             |                                                  |
| Feedback resistor      | 19.6 k $\Omega$ – 1.93 M $\Omega$ , 320 codes                          | monotonic at every corner                        |
| Full-scale current     | $\pm 40.7 \mu\text{A}$ ( $N=0$ ) to $\pm 0.41 \mu\text{A}$ ( $N=319$ ) | SAR window $\cap$ TIA compliance                 |
| Current quantum        | 0.824 nA at maximum gain                                               | below the 2 nA noise budget                      |
| Bipolar accuracy       | 0.25–0.38 LSB worst                                                    | 560 k $\Omega$ , 1 M $\Omega$ electrode, corners |
| Control-loop PM        | 79–80°                                                                 | five corners, into a cell                        |
| TIA-loop PM            | 89–93°                                                                 | 12-cell electrode grid                           |
| Input current noise    | 341 pA standalone, 3.6–21 nA into an electrode                         | 0.1–100 Hz, 560 k $\Omega$                       |
| Zero-current offset    | $\sigma(v_{\text{re}}) = 5.72 \text{ mV}$ , gain-independent           | 200 MC samples, calibratable                     |
| Quiescent current      | 197–250 $\mu\text{A}$ per channel                                      | amplifiers + local bias                          |

\*schematic sim    ■ Monte Carlo, 200 samples

**Pre-layout, electrode held nominal: no row includes electrode-to-electrode spread.**

# Castalia at a glance

Castalia

Maxx Seminario

## Digital

|                 |                                        |
|-----------------|----------------------------------------|
| Harts           | 5 (1 orchestrator, 4 channel tiles)    |
| ISA             | rv32imac_zba_zbb_zbs_zbc               |
| Clock           | 24 MHz rated, closed at 25 MHz         |
| Measured CPI    | 1.260 aggregate, nine benchmarks       |
| Private TCM     | 8 KiB per hart, 1-cycle                |
| Shared RAM      | 80 KiB behind a round-robin arbiter    |
| Synchronisation | 16 hardware mutexes, LR/SC, AMOs       |
| Interrupts      | claim/complete, any vector to any hart |
| Accelerator     | NPU: MLP, conv-1D, XNOR, GEMM          |
| Power domains   | 4 MTCMOS, one per channel tile         |
| Debug           | JTAG, RISC-V Debug Module              |
| Field boot      | NFC ISO 14443A harvested boot          |

## Analog and physical

|                   |                                                                |
|-------------------|----------------------------------------------------------------|
| Measurement sites | 4 identical, simultaneous                                      |
| Topology          | bipolar grounded-WE potentiostat                               |
| Electrode pads    | 12 (CE/RE/WE $\times$ 4)                                       |
| Converter         | 10-bit SAR per channel, extracted                              |
| Reference DAC     | 12-bit R-2R per channel                                        |
| Feedback resistor | $18\text{ k}\Omega + 6\text{ k}\Omega \cdot N$ , 320 codes     |
| Full scale        | $\pm 40.7\text{ }\mu\text{A}$ to $\pm 0.41\text{ }\mu\text{A}$ |
| EIS               | firmware mode of the same channels                             |
| Analog supply     | $2.5\text{ V}$ , $v_{\text{cm}} = 1.25\text{ V}$               |
| Process           | 65 nm CMOS, 1P8M, HVT cells                                    |
| Die / package     | $3.0 \times 3.0\text{ mm}$ / LQFP-100                          |
| Digital power     | 10.72 mW post-route, SS, 25 MHz                                |

**Digital numbers from the hardened flow; analog numbers schematic-level, except the SAR, which is extracted.**

# Digital, as closed

## Castalia

### Maxx Seminario

Target application

The chip

Analog front end

Operating modes

Analog blocks

Digital

Vision

Against Moshkin and the field

From currents to a score

References

Backup

### Whole chip, post-route

|           |         |
|-----------|---------|
| Internal  | 3.78 mW |
| Switching | 2.33 mW |
| Leakage   | 4.61 mW |

|              |                 |
|--------------|-----------------|
| <b>Total</b> | <b>10.72 mW</b> |
|--------------|-----------------|

### One channel tile

|       |          |
|-------|----------|
| Total | 1.761 mW |
| Gated | 0        |

### Measured CPI, timed kernels

| Benchmark        | Instr.           | CPI          |
|------------------|------------------|--------------|
| spmv             | 802 447          | 1.143        |
| multiply         | 20 892           | 1.163        |
| vvadd            | 2 408            | 1.374        |
| median           | 4 015            | 1.398        |
| qsort            | 123 205          | 1.398        |
| rsort            | 146 548          | 1.412        |
| dhrystone        | 200 523          | 1.504        |
| towers           | 3 747            | 1.682        |
| memcpy           | 11 017           | 1.726        |
| <b>Aggregate</b> | <b>1 314 802</b> | <b>1.260</b> |

### Timing at 25 MHz

|               |        |
|---------------|--------|
| reg2reg WNS   | +99 ps |
| Leakage share | 43 %   |

■ hardened flow, post-route

SS 0.9 V 125 °C, statistical activity 0.2. Gating one tile removes 1.76 mW; the always-on band pays nothing.

# Power gating: one switched rail per channel tile

Castalia

Maxx Seminario

Target application

The chip

Analog front end

Operating modes

Analog blocks

Digital



Vision

Against Musklin and the field

From currents to a score

References

Backup

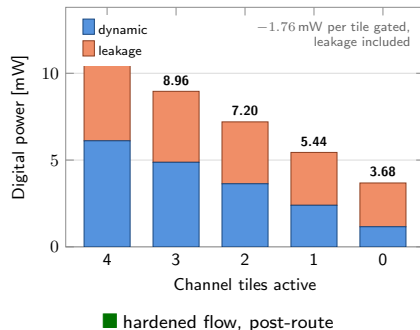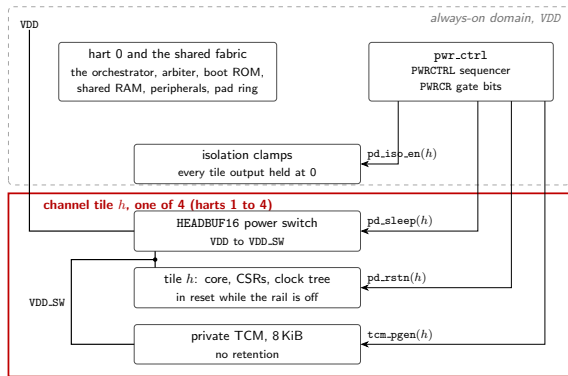

**Cold gating:** the header cuts the rail, so a parked tile draws neither dynamic nor leakage power. Each tile gated removes 1.76 mW; the always-on band keeps 3.68 mW.



# Vision: the same channel, without the cartridge

Castalia

Maxx Seminario

Target application

The chip

Analog front end

Operating modes

Analog blocks

Digital


Vision

Against Moshkin and the field

From currents to a score

References

Backup

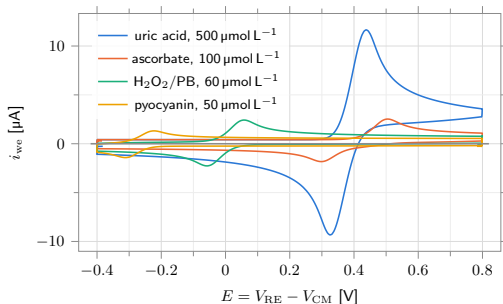

\* schematic sim

## Already on the die

|         |                                             |
|---------|---------------------------------------------|
| 4 sites | concurrent, each its own DAC, SAR, hart     |
| EIS     | electrode state without a second instrument |
| NFC     | harvested boot, battery-free readout        |
| MTCMOS  | a parked site costs nothing                 |
| NPU     | the decision stays on the patient           |

Left: a small-molecule wound panel, uric acid, ascorbate,  $\text{H}_2\text{O}_2$  and pyocyanin, through the same channel.

The ovarian panel stays a serum test: CA-125 is an epitope on a 3–5 MDa mucin and does not reach interstitial fluid. The wearable is a different, reagentless panel on the same silicon; the implant is the same plus a fouling problem that EIS can watch but not solve.

# Against the field: the ISCAS'26 table, plus Castalia

## Castalia

### Maxx Seminario

### Target application

### The chip

### Analog front end

### Operating modes

### Analog blocks

### Digital

### Vision

### Against Myshkin and the field

### From currents to a score

### References

### Backup

| Parameter         | Castalia (this work)   | Myshkin [9]       | Chen '19 [10] | Ghoreishizadeh '17 [11] | Lin '23 [12] |
|-------------------|------------------------|-------------------|---------------|-------------------------|--------------|
| Modality          | <b>CA/CV/DPV/EIS</b>   | CA/CV             | CA/CV         | CA/CV                   | CV/EIS       |
| Channels          | <b>4, simultaneous</b> | 1                 | 1             | 1, differential         | 1            |
| Current direction | <b>bipolar</b>         | unipolar          | bipolar       | bipolar                 | bipolar      |
| Sensitivity (pA)  | 341 <sup>a</sup>       | 56.5 <sup>b</sup> | 41            | 0.47                    | 1.7          |
| $I_{\max}$ (μA)   | ±40.7                  | +20               | ±5            | ±20                     | -48/+16      |
| Power (mW)        | 3.68 <sup>c</sup>      | 3.0 <sup>d</sup>  | 0.016         | 9.3                     | 1.0          |
| Process (nm)      | 65                     | 65                | 180           | 350                     | 180          |
| On-chip processor | <b>5 RISC-V harts</b>  | 1 RISC-V hart     | none          | none                    | none         |
| On-chip ML        | <b>NPU, 4 modes</b>    | NPU, 1 mode       | none          | none                    | none         |

Castalia column is best case and pre-silicon. <sup>a</sup>AFE only: input-referred rms, 0.1–100 Hz, maximum gain, ideal  $R_f$ , no electrode; the converter LSB is 0.82 nA. <sup>b</sup>AFE only; ADC quantisation limits the system to 153 pA. <sup>c</sup>Digital only: hart 0 awake, all four channel tiles gated, post-route SS 125 °C 25 MHz; one channel measuring adds 1.76 mW (tile) + 1.14 mW (AFE). <sup>d</sup>Measured: 2.8 mW digital at 24 MHz + 258 μW AFE.

**Still the only entries with a processor and an ML engine on the die; Castalia adds concurrency, both current polarities and EIS.**

# The fusion runs on the NPU

Castalia

Maxx Seminario

Target  
application

The chip

Analog front end

Operating modes

Analog blocks

Digital

Vision

Against Moshkin  
and the field

From currents to  
a score

References

Backup

$$s = \sigma \left( \sum_{k=1}^4 w_k \hat{c}_k + b \right)$$

|         |                                                   |
|---------|---------------------------------------------------|
| Input   | peak current, peak potential, baseline $\times 4$ |
| Mode    | 0, dense layer, one sigmoid                       |
| Output  | one risk score                                    |
| Weights | trained off-chip, staged by firmware              |

## Per site

|           |                                   |
|-----------|-----------------------------------|
| Hart      | 1, ownership enforced in hardware |
| Potential | own 12-bit DAC                    |
| Converter | own 10-bit SAR                    |
| Power     | own MTCMOS domain                 |

**The logistic form of the cleared two-marker algorithm, extended to four inputs and moved from the central laboratory onto the electrode.**

# References (1/5)

Castalia

Maxx Seminario

Target application

The chip

Analysis front end

Operating modes

Analysis blocks

Digital

Vision

Against Muskin and the field

From currents to a score

References

Backup

- [1] NCI, *SEER Cancer Stat Facts*, per-site pages, [seer.cancer.gov/statfacts](https://seer.cancer.gov/statfacts), accessed 20 Sep. 2026. Stage, survival: SEER 21, 2016–22; cases, deaths: 2026 est.
- [2] D. C. Grossman *et al.*, “Screening for ovarian cancer: USPSTF recommendation statement,” *JAMA* 319:588, 2018.
- [3] USPSTF, *A and B Recommendations; Prostate Cancer: Screening*, 2018; *Pancreatic Cancer: Screening*, 2019. [uspreventiveservicestaskforce.org](https://uspreventiveservicestaskforce.org).
- [4] U. Menon *et al.*, “Ovarian cancer population screening and mortality after long-term follow-up in UKCTOCS,” *Lancet* 397:2182, 2021.
- [5] F. Chen *et al.*, “Clinical analysis of four serum tumor markers in 458 patients with ovarian tumors: combined use of HE4, CA125, CA19-9, and CEA,” *Cancer Manag. Res.* 10:1313, 2018.
- [6] R. G. Moore *et al.*, “A novel multiple marker bioassay utilizing HE4 and CA125 for the prediction of ovarian cancer in patients with a pelvic mass,” *Gynecol. Oncol.* 112:40, 2009.

## References (2/5)

Castalia

Maxx Seminario

Target application

The chip

Analogue front end

Operating modes

Analogue blocks

Digital

Vision

Against Musklin and the field

From currents to a SoC

References

Backup

- [7] USPSTF, *Grade Definitions* (current, after July 2012), [uspreventiveservicestaskforce.org](https://uspreventiveservicestaskforce.org), accessed 20 Sep. 2026.
- [8] P. Charkhchi *et al.*, "CA125 and ovarian cancer: a comprehensive review," *Cancers* 12:3730, 2020.
- [9] M. A. Seminario, S. McRobert, A. Uerling, P. Aberson, S. Balkır, J. A. Schmitz and E. J. Markvicka, "An electrochemical sensing SoC for autonomous wound monitoring," *IEEE ISCAS*, 2026.
- [10] Y.-C. Chen, S.-Y. Lu and Y.-T. Liao, "A microwatt dual-mode electrochemical sensing current readout with current-reducer ramp waveform generation," *IEEE TBioCAS* 13(6):1163, 2019.
- [11] S. S. Ghoreishizadeh *et al.*, "A differential electrochemical readout ASIC with heterogeneous integration of bio-nano sensors for amperometric sensing," *IEEE TBioCAS* 11(5):1148, 2017.
- [12] Y.-J. Lin *et al.*, "A multimodality electrochemical and impedance spectroscopy system-on-a-chip with temperature sensing and impedance-boosting techniques," *IEEE TBioCAS* 17(4):857, 2023.

## References (3/5)

Castalia

Maxx Seminario

Target  
application

The chip

Analysis front end

Operating modes

Analysis blocks

Digital

Vision

Against Muskin  
and the field

From currents to  
a scan

References

Backup

- [13] A. J. Bard and L. R. Faulkner, *Electrochemical Methods: Fundamentals and Applications*, 2nd ed., Wiley, 2001 (Eqs. 3.3.11, 4.4.2, 4.4.29, Sec. 1.4.2, Eq. 6.2.19).
- [14] M. S. Wilson and W. Nie, "Multiplex measurement of seven tumor markers using an electrochemical protein chip," *Anal. Chem.*, 2006.
- [15] A. Kovářová *et al.*, "Biosensor with electrochemically active nanocomposites for signal amplification and simultaneous detection of three ovarian cancer biomarkers," *Electrochim. Acta*, 2023.
- [16] V. Mirčeski *et al.*, "Square-wave voltammetry: a review on the recent progress," *Electroanalysis*, 2013.
- [17] D. Britz and J. Strutwolf, *Digital Simulation in Electrochemistry*, 4th ed., Springer, 2016 (Ch. 3 box method, Ch. 7 expanding grid).
- [18] S. W. Feldberg, "Digital simulation: a general method for solving electrochemical diffusion-kinetic problems," *Electroanal. Chem.* 3:199, 1969; J. E. B. Randles, *Discuss. Faraday Soc.* 1:11, 1947.

# References (4/5)

Castalia

Maxx Seminario

Target application

The chip

Analogue front end

Operating modes

Analogue blocks

Digital

Vision

Against Muskin and the field

From currents to a score

References

Backup

- [19] Jog *et al.*, Verilog-A three-electrode model with kinetics and mass transport for co-simulation with interface circuits, *IEEE SENSORS*, 2024, doi:10.1109/SENSORS60989.2024.10784491; S. Madec *et al.*, *IEEE TCAS-I* 66(6):2188, 2019.
- [20] P. Fanjul-Bolado, M. B. González-García and A. Costa-García, "Amperometric detection in TMB/HRP-based assays," *Anal. Bioanal. Chem.* 382:297, 2005.

- [21] M. Bilgi Kamaç *et al.*, "Point-of-care testing: a disposable label-free electrochemical CA125 and HE4 immunosensors for early detection of ovarian cancer," *Biomed. Microdevices* 25:18, 2023.
- [22] D. Kang, F. Ricci, R. J. White and K. W. Plaxco, "Survey of redox-active moieties for application in multiplexed electrochemical biosensors," *Anal. Chem.* 88(21):10452, 2016.

# References (5/5)

Castalia

Maxx Seminario

Target  
application

The chip

Analogue front end

Operating modes

Analogue blocks

Digital

Vision

Against Muskin  
and the field

From currents to  
a score

References

Backup

[23] V. Clark, M. Aller Pellitero and N. Arroyo-Currás, "Explaining the decay of nucleic acid-based sensors under continuous voltammetric interrogation," *Anal. Chem.* 95(11):4974, 2023.

[24] K. K. Leung *et al.*, "Elucidating the mechanisms underlying the signal drift of electrochemical aptamer-based sensors in whole blood," *ACS Sens.* 6:3340, 2021.

[25] H. Li *et al.*, "Dual-reporter drift correction to enhance the performance of electrochemical aptamer-based sensors in whole blood," *J. Am. Chem. Soc.* 138:15809, 2016.

[26] J. Sabatè del Río *et al.*, "An antifouling coating that enables affinity-based electrochemical biosensing in complex biological fluids," *Nat. Nanotechnol.* 14:1143, 2019.



## Backup: electrode model validation

Castalia

Maxx Seminario

Target application

The chip

Analog front end

Operating modes

Analog blocks

Digital

Vision

Against Muskin  
and the field

From currents to  
a score

References

Backup

| Scan rate<br>$\text{mV s}^{-1}$ | $i_p$ Randles–Ševčík<br>$\mu\text{A}$ | $i_p$ model<br>$\mu\text{A}$ | Error<br>% | Error, $C_{\text{dl}} \rightarrow 0$<br>% | $\Delta E_p$<br>$\text{mV}$ |
|---------------------------------|---------------------------------------|------------------------------|------------|-------------------------------------------|-----------------------------|
| 25                              | 0.951                                 | 0.952                        | +0.08      | −0.45                                     | 58.78                       |
| 50                              | 1.345                                 | 1.349                        | +0.32      | −0.42                                     | 59.85                       |
| 100                             | 1.902                                 | 1.915                        | +0.67      | −0.38                                     | 60.41                       |
| 200                             | 2.690                                 | 2.721                        | +1.16      | −0.33                                     | 62.33                       |
| 400                             | 3.804                                 | 3.875                        | +1.86      | −0.25                                     | 64.74                       |

Peak current against Randles–Ševčík and  $\Delta E_p$  against Nicholson [13], reversible couple,  $C_{\text{dl}} = 0$  column isolates the faradaic model.

## Backup: USPSTF screening grades

Castalia

Maxx Seminario

Target application

The chip

Analog front end

Operating modes

Analog blocks

Digital

Vision

Against Musklin and the field

From currents to a score

References

Backup

| Grade    | Certainty of net benefit          | Definition [7]                                                      | Cancer screening [2, 3]                                                                        |
|----------|-----------------------------------|---------------------------------------------------------------------|------------------------------------------------------------------------------------------------|
| <b>A</b> | high, substantial                 | Recommends the service. Offer or provide it.                        | cervix (2018), colorectal 50–75 (2021)                                                         |
| <b>B</b> | high moderate, or moderate        | Recommends the service. Offer or provide it.                        | breast 40–74 (2024), lung LDCT 50–80 (2021), colorectal 45–49 (2021) prostate PSA 55–69 (2018) |
| <b>C</b> | at least moderate, small          | Offer selectively, by professional judgment and patient preference. |                                                                                                |
| <b>D</b> | no net benefit, or harms outweigh | Recommends <i>against</i> the service. Discourage its use.          | <b>ovary (2018)</b> , pancreas (2019)                                                          |
| <b>I</b> | cannot be determined              | Evidence insufficient, poor, or conflicting.                        | —                                                                                              |
| none     | —                                 | No USPSTF statement exists for the condition.                       | uterus                                                                                         |

Ovarian D is a verdict on a test that was tried, CA-125 plus transvaginal ultrasound [2, 4], not on the absence of one.