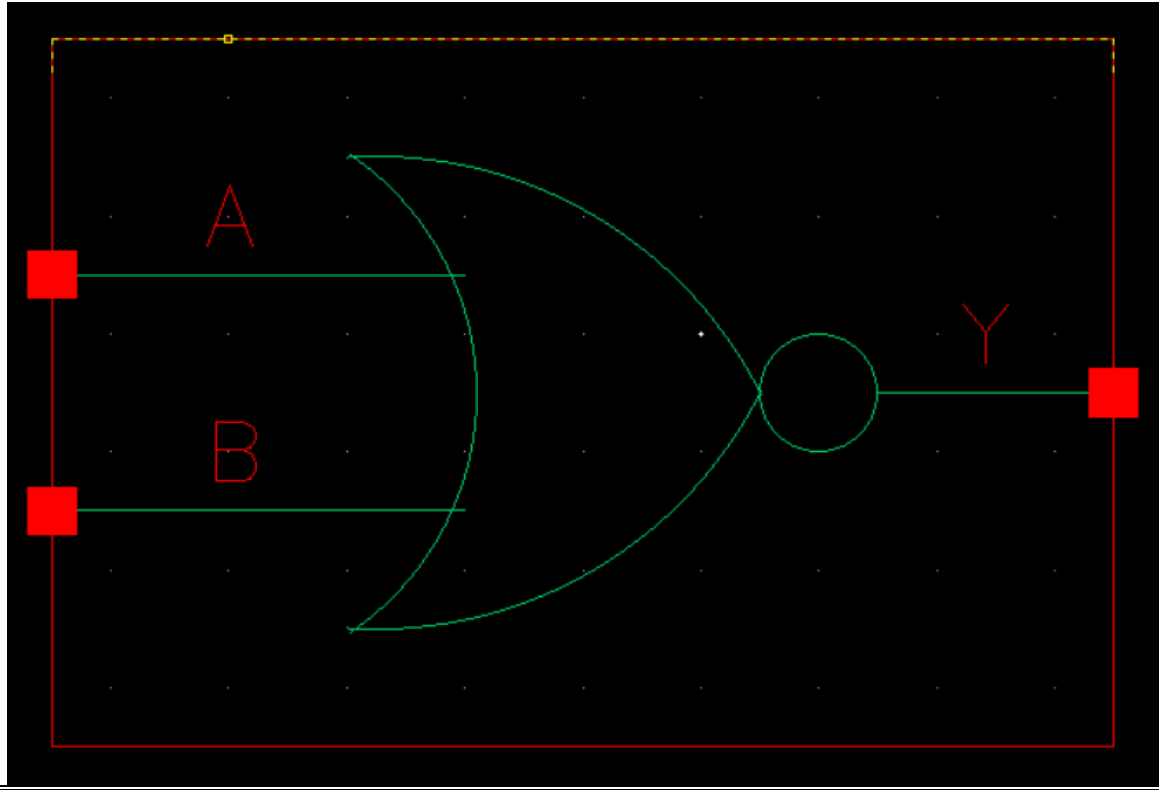
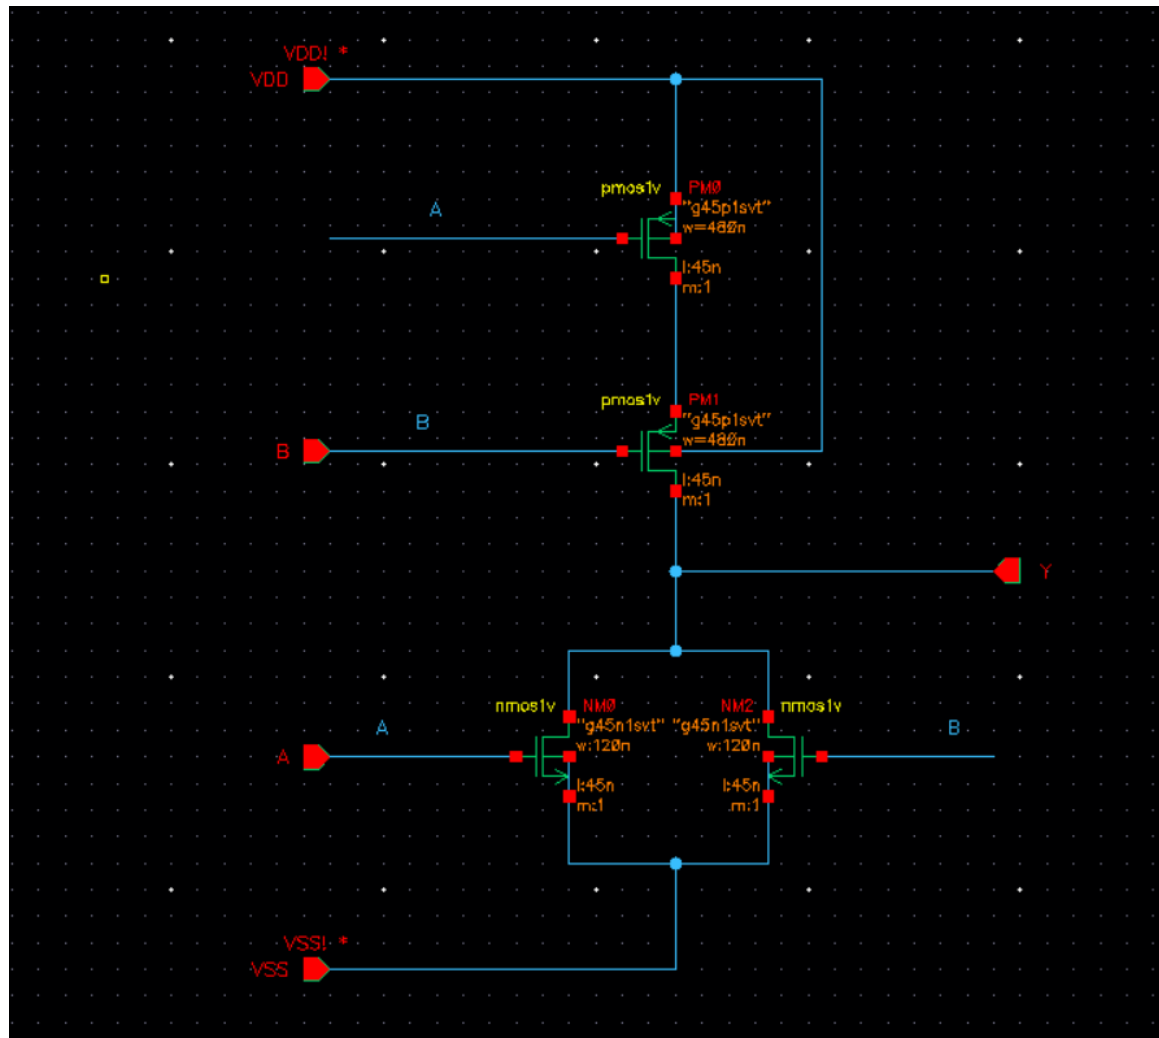
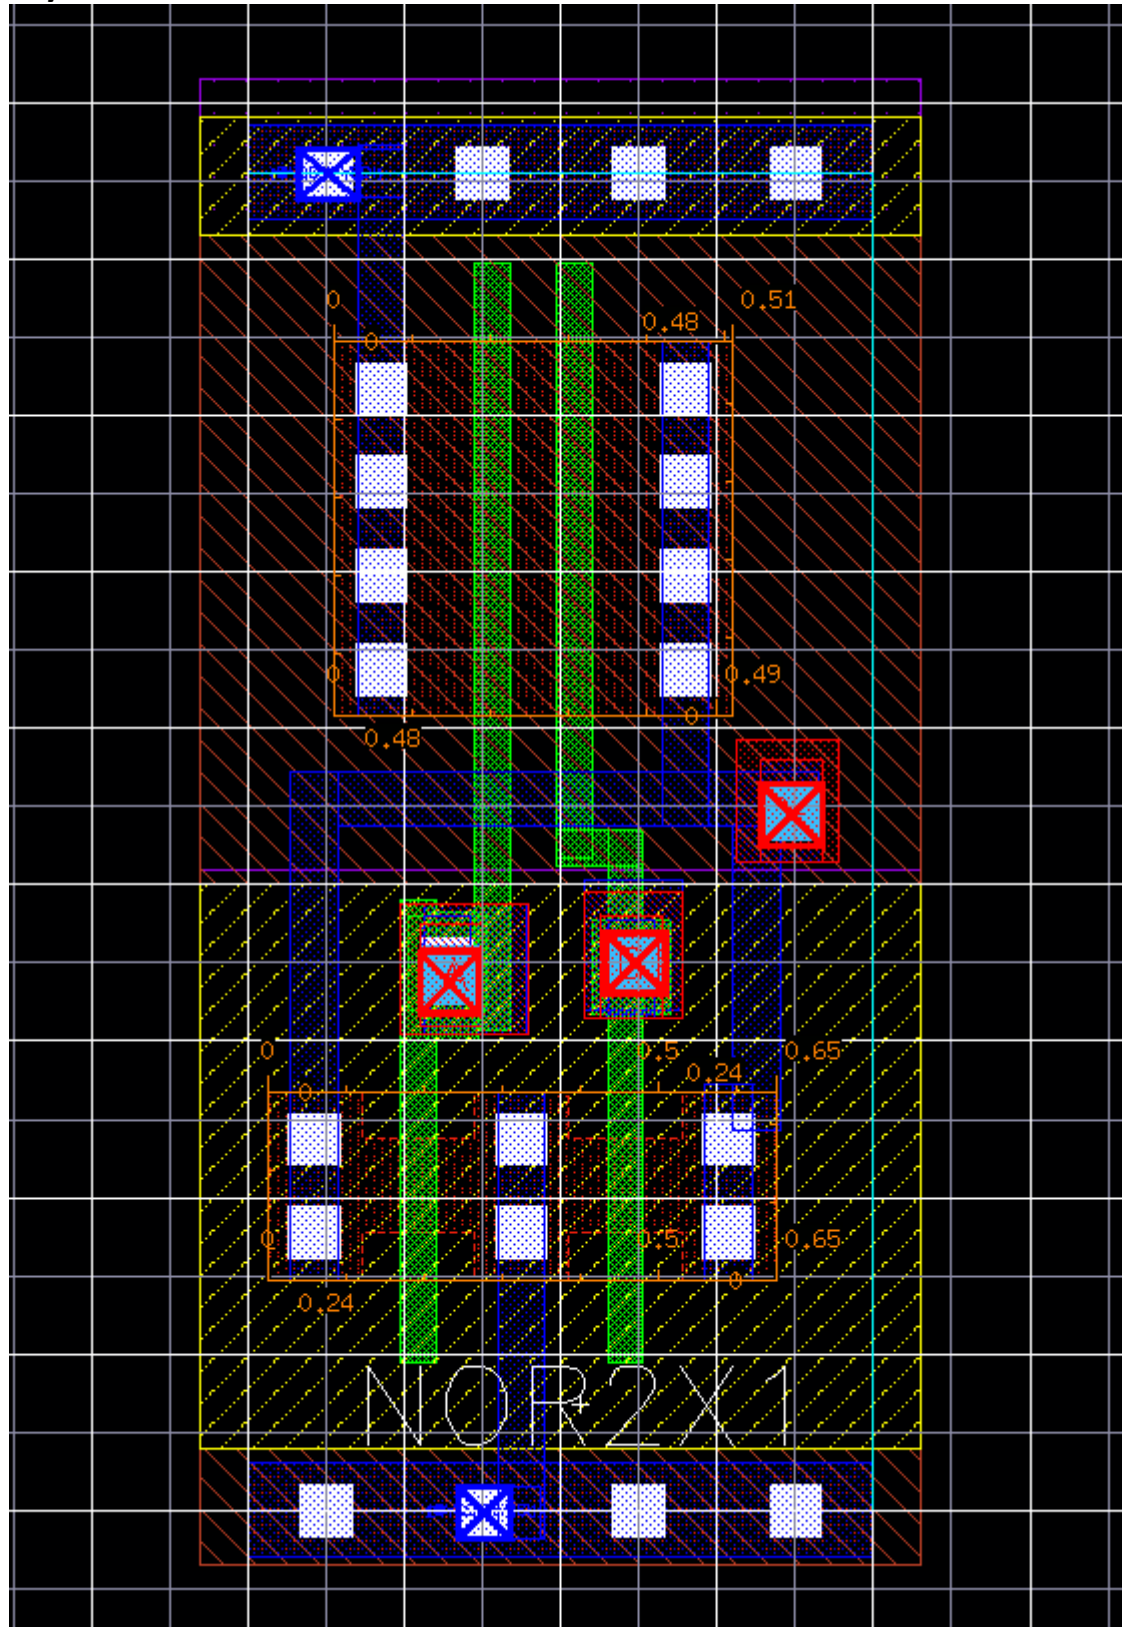




Library Name:	cgm	
Cell Name:	NOR2XI	
Function/Truth Table:		
A	B	Y
0	0	1
0	1	0
1	0	0
1	1	0
Propagation Delay (path based): with extracted parasitics		
Transition		Delay (s)
A → Y ↑ (T_PLH)		1.364n
A → Y ↓ (T_PHL)		1.598n
B → Y ↑ (T_PLH)		1.352n
B → Y ↓ (T_PHL)		1.605n
Output Rise Time (path based):		
Transition		Rise Time (s)
A → Y ↑		2.62n
B → Y ↑		2.622n
Output Fall Time (path based):		
Transition		Fall Time (s)
A → Y ↓		3.153n
B → Y ↓		3.197n

Layout Height: 1.71 μ m**Layout Width: 0.8 μ m****Layout Area: 1.368 μ m²****Symbol with Port Names:**

Schematic:

Layout:

Functional Simulation Waveforms

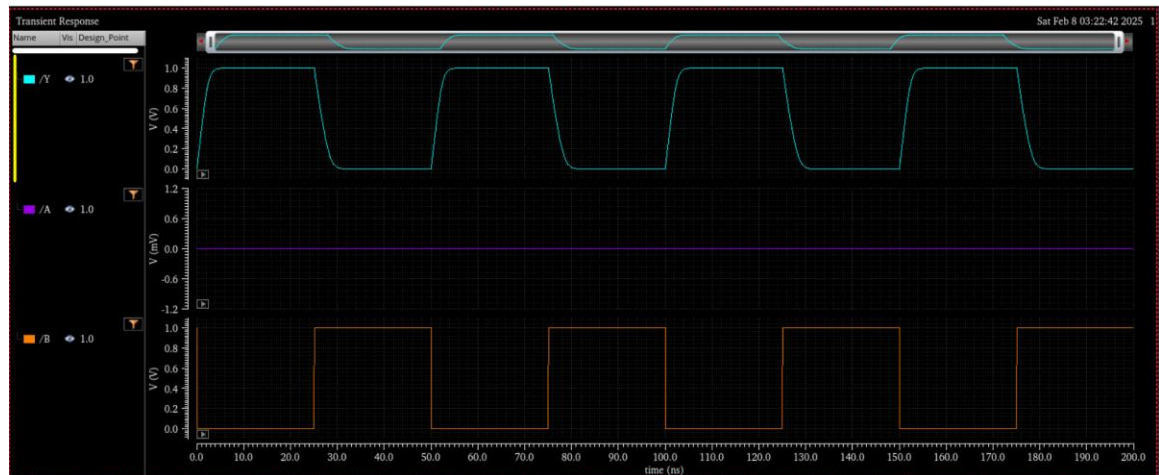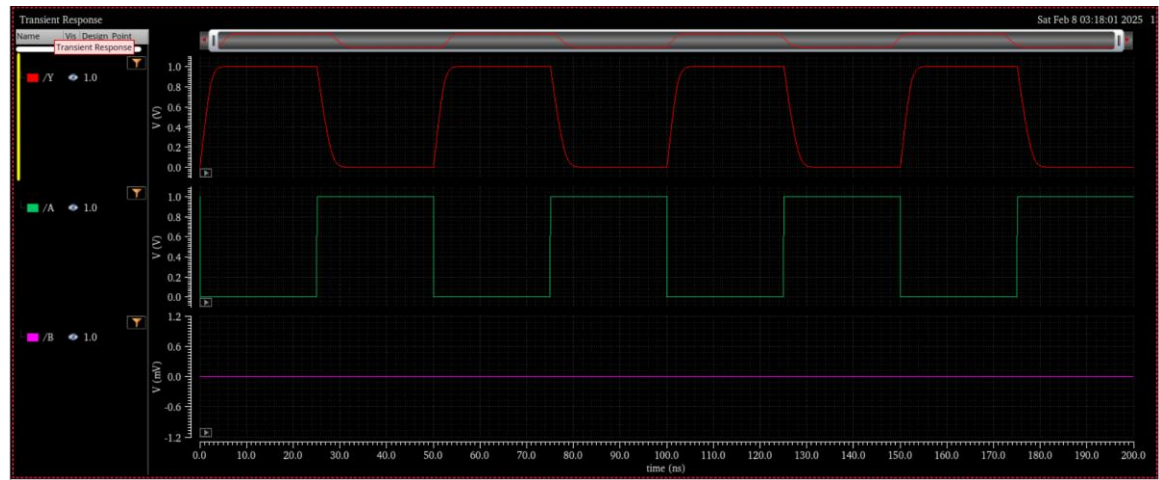

Comments/Notes:

The NOR2X1 gate with extracted parasitics was successfully tested, confirming correct functional verification. The timing results show an increase in delays compared to the pre-layout simulation, highlighting the impact of parasitic resistances and capacitances from interconnects and device structures.