
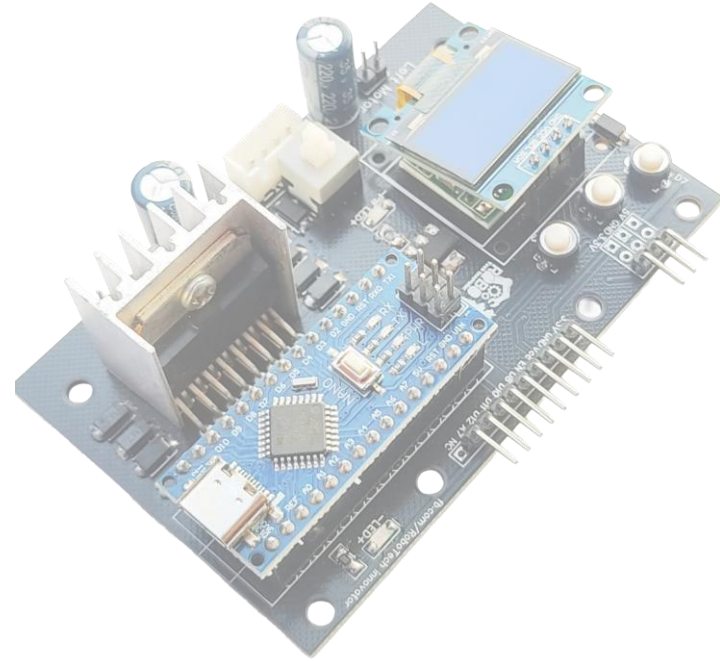


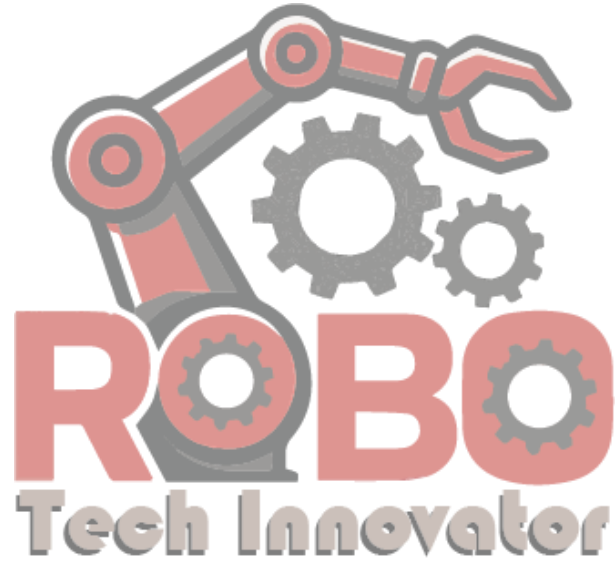

LFR Carrier Board v1.2

By RoboTech Innovator BD


Specifications

Specifications:


- > Width: 8.8cm, Length: 5.7 cm
- > Built-in Motor Driver with Heatsink (L298N)
- > Input Voltage 5-18V
- > 2A Continuous Current/Channel
- > 3A Peak
- > 2s/3s Battery Options
- > Built-in Buck Module
- > 0.69 OLED Display
- > Reverse Polarity Protection
- > Back EMF Protection from Motors.
- > Voltage Select for Sensor (3.3/5v)
- > 5v (2A) & 3.3v (800mA) Output Pin
- > Power LED Indicator
- > 3 Programming Buttons
- > Suitable for N20, 16GA, & 25GA Motors.
- > Free Operating System with OLED
- > Video Tutorial
- > LFR Demo Code




Introduction to Components and Pinout

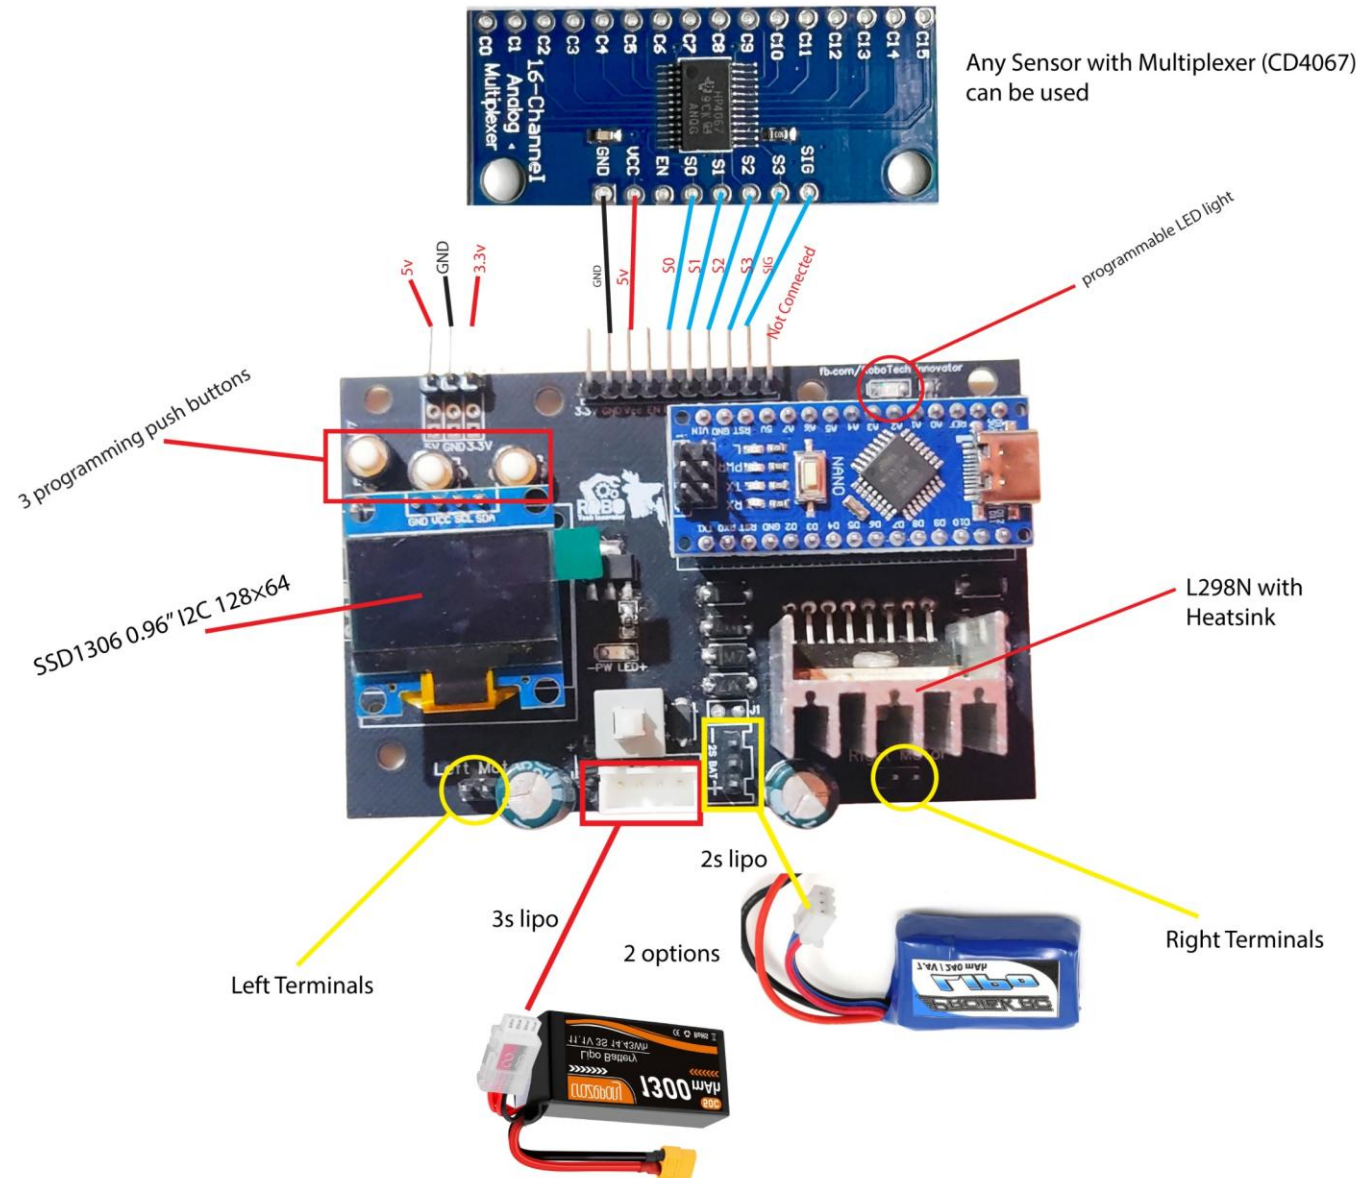


How to Connect 8 Channel Sensor

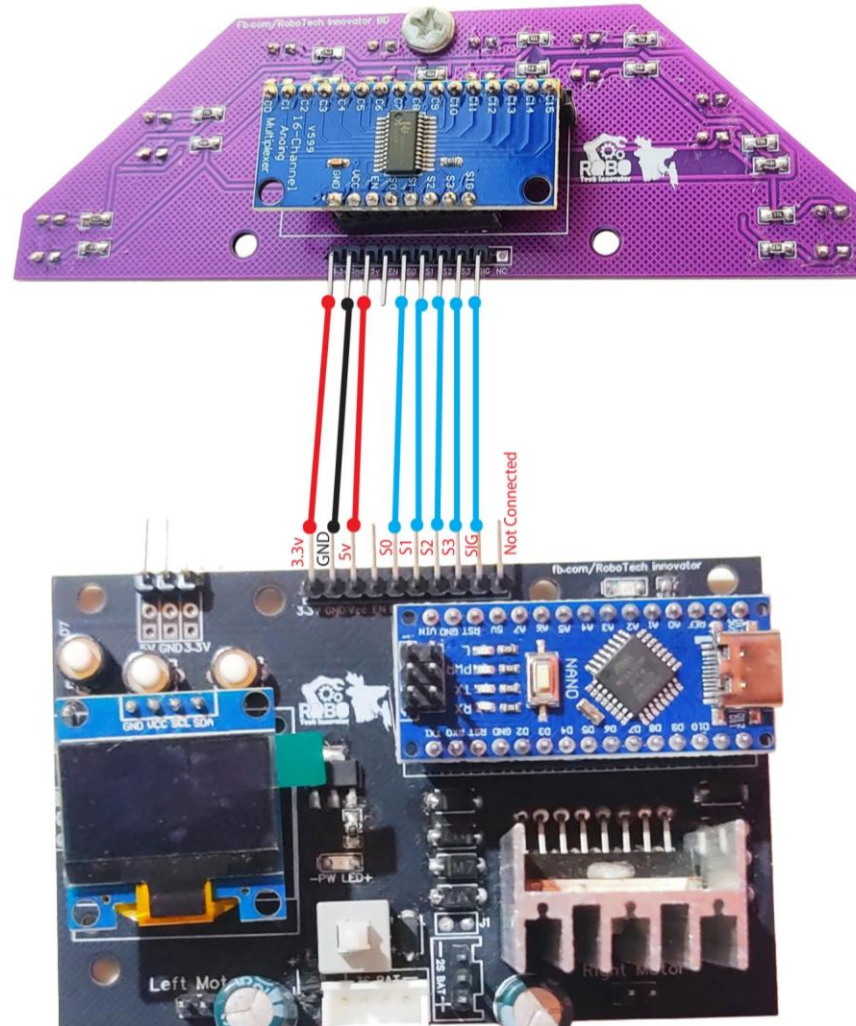


How to Connect 14 Channel Sensor

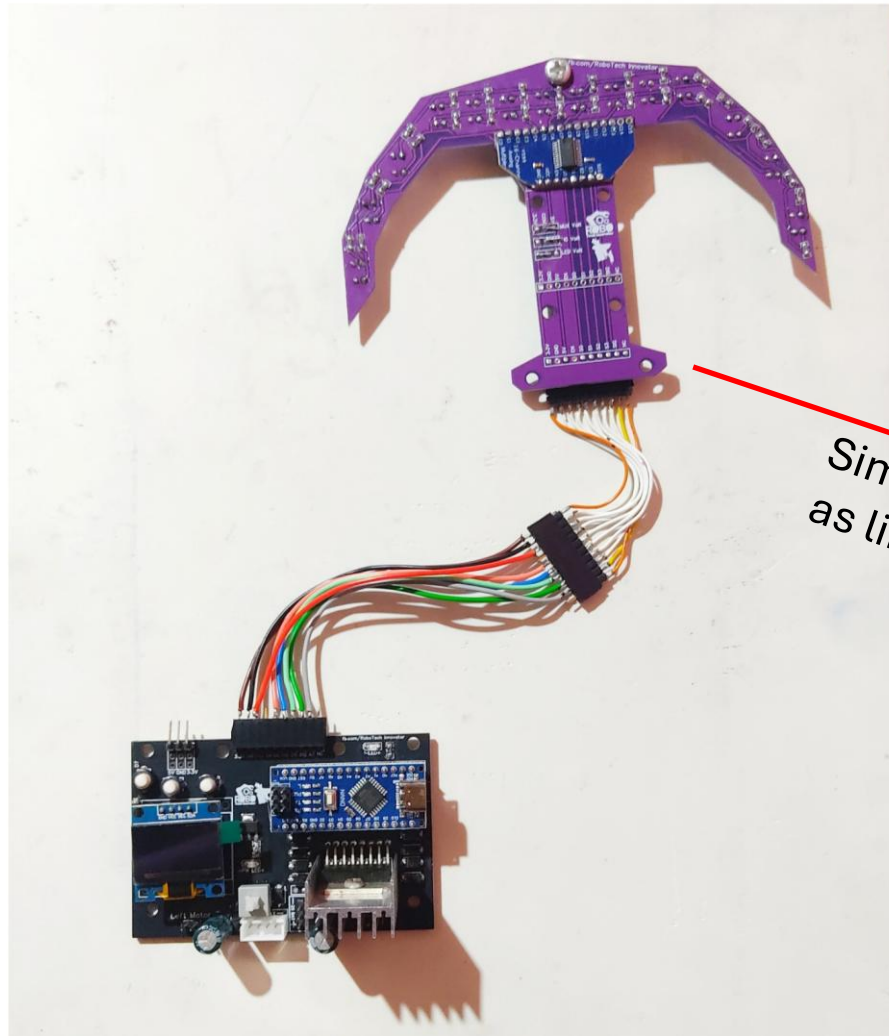



Similar Connection
as like 8 Channel

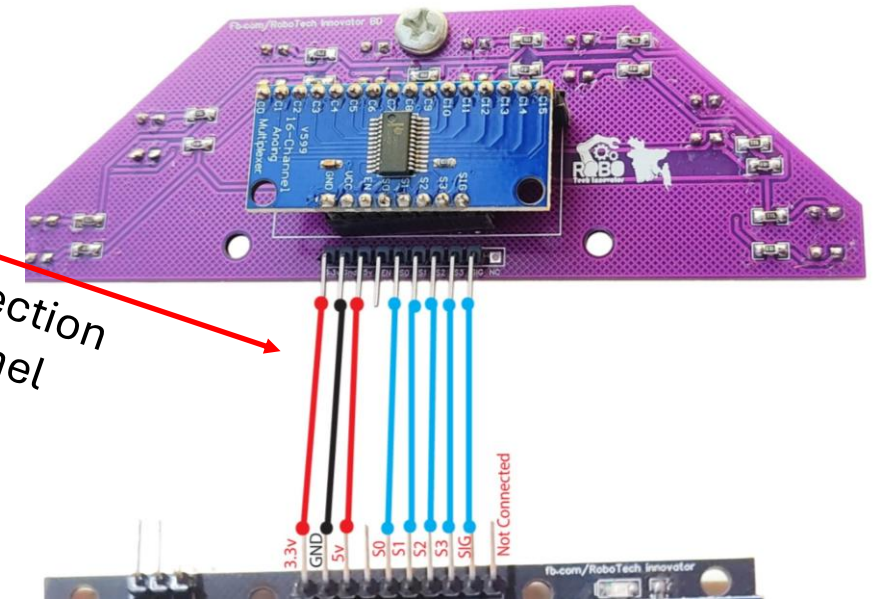

How to Connect Motors

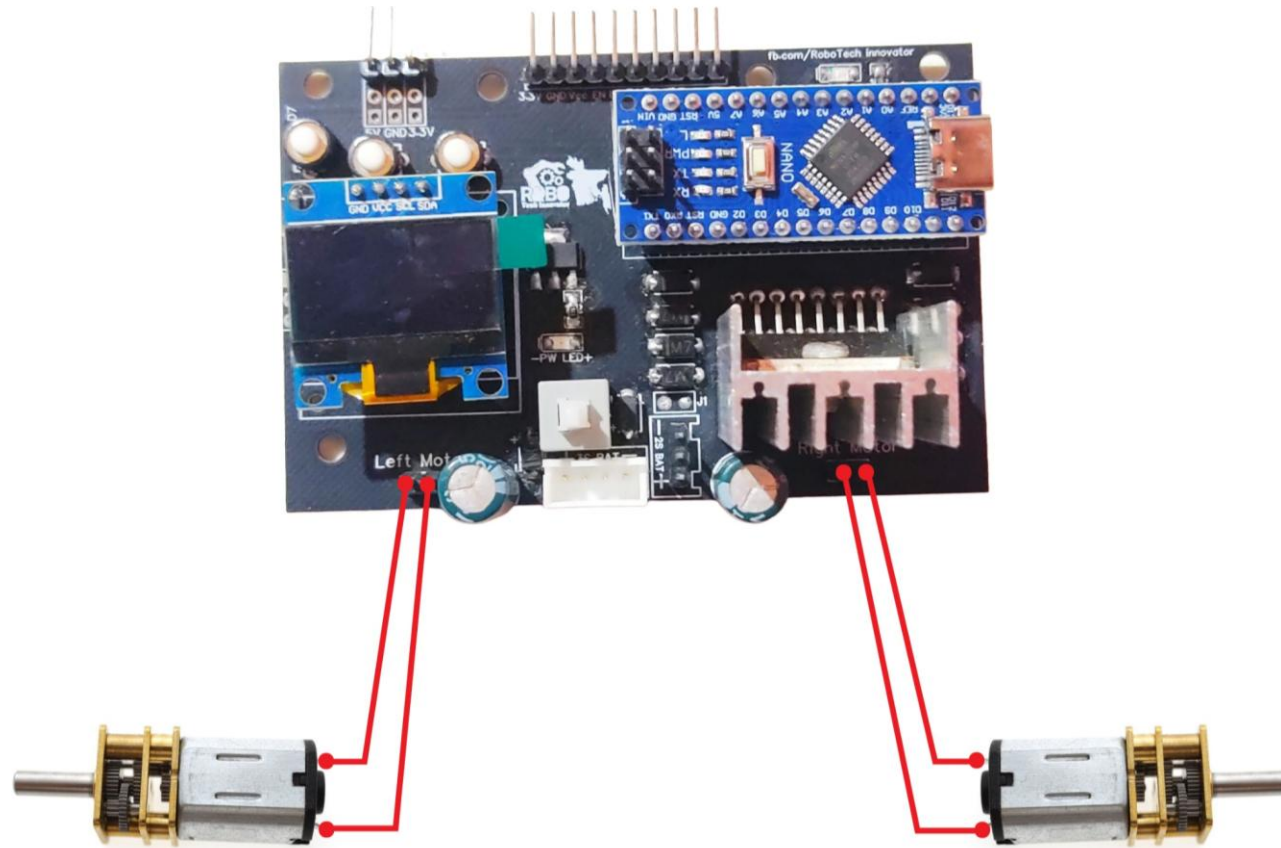

GPIO Mapping for Arduino NANO

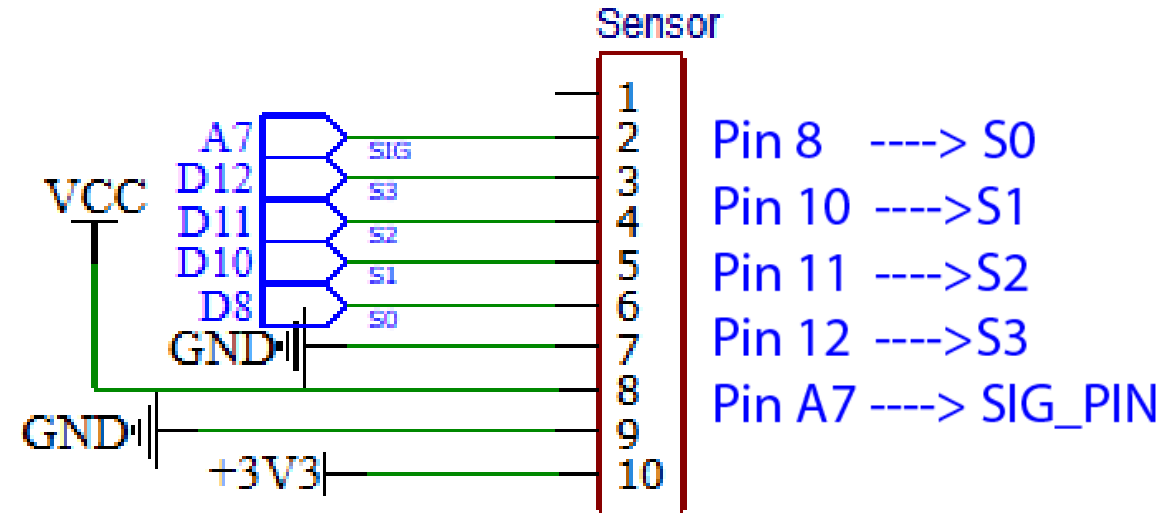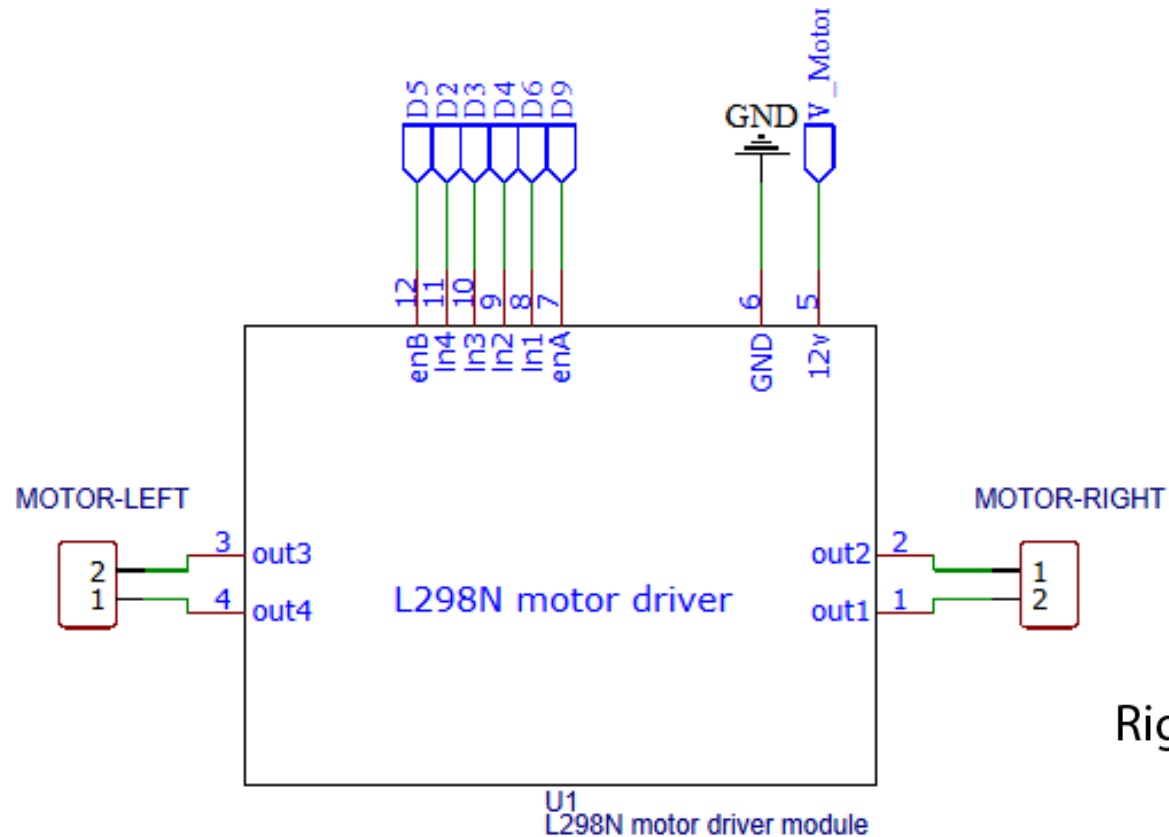

Right Motor { Pin 6 -----IN1(L298)
Pin 4 -----IN2(L298)






Left Motor { Pin 5 -----IN3(L298)
Pin 2 -----IN4(L298)

//speed control pins (PWM)

Right Motor PWM Pin 9 -----EnA (L298)

Left Motor PWM Pin 5 -----EnB (L298)

GPIO Mapping for Arduino NANO

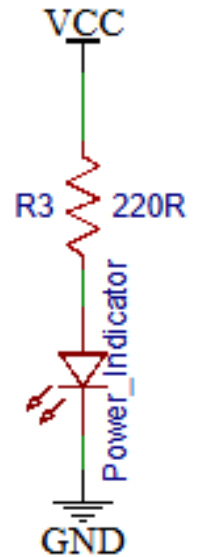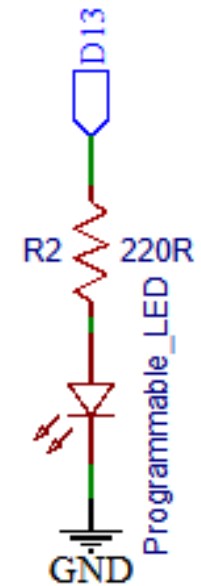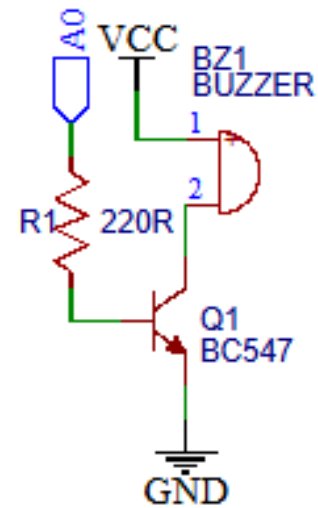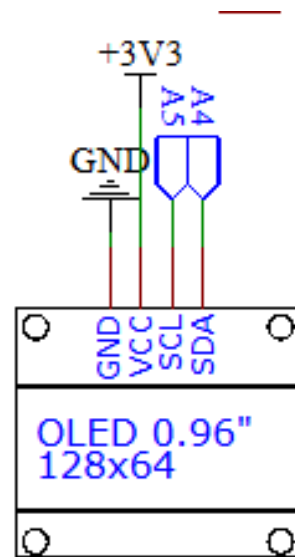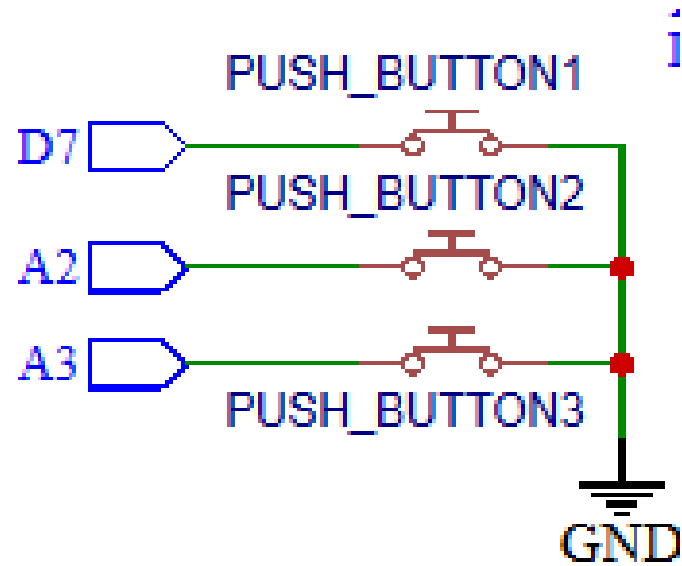

8 Channel Demo Code

<https://github.com/mdaslamhossain3825-glitch/Part-10-Files>