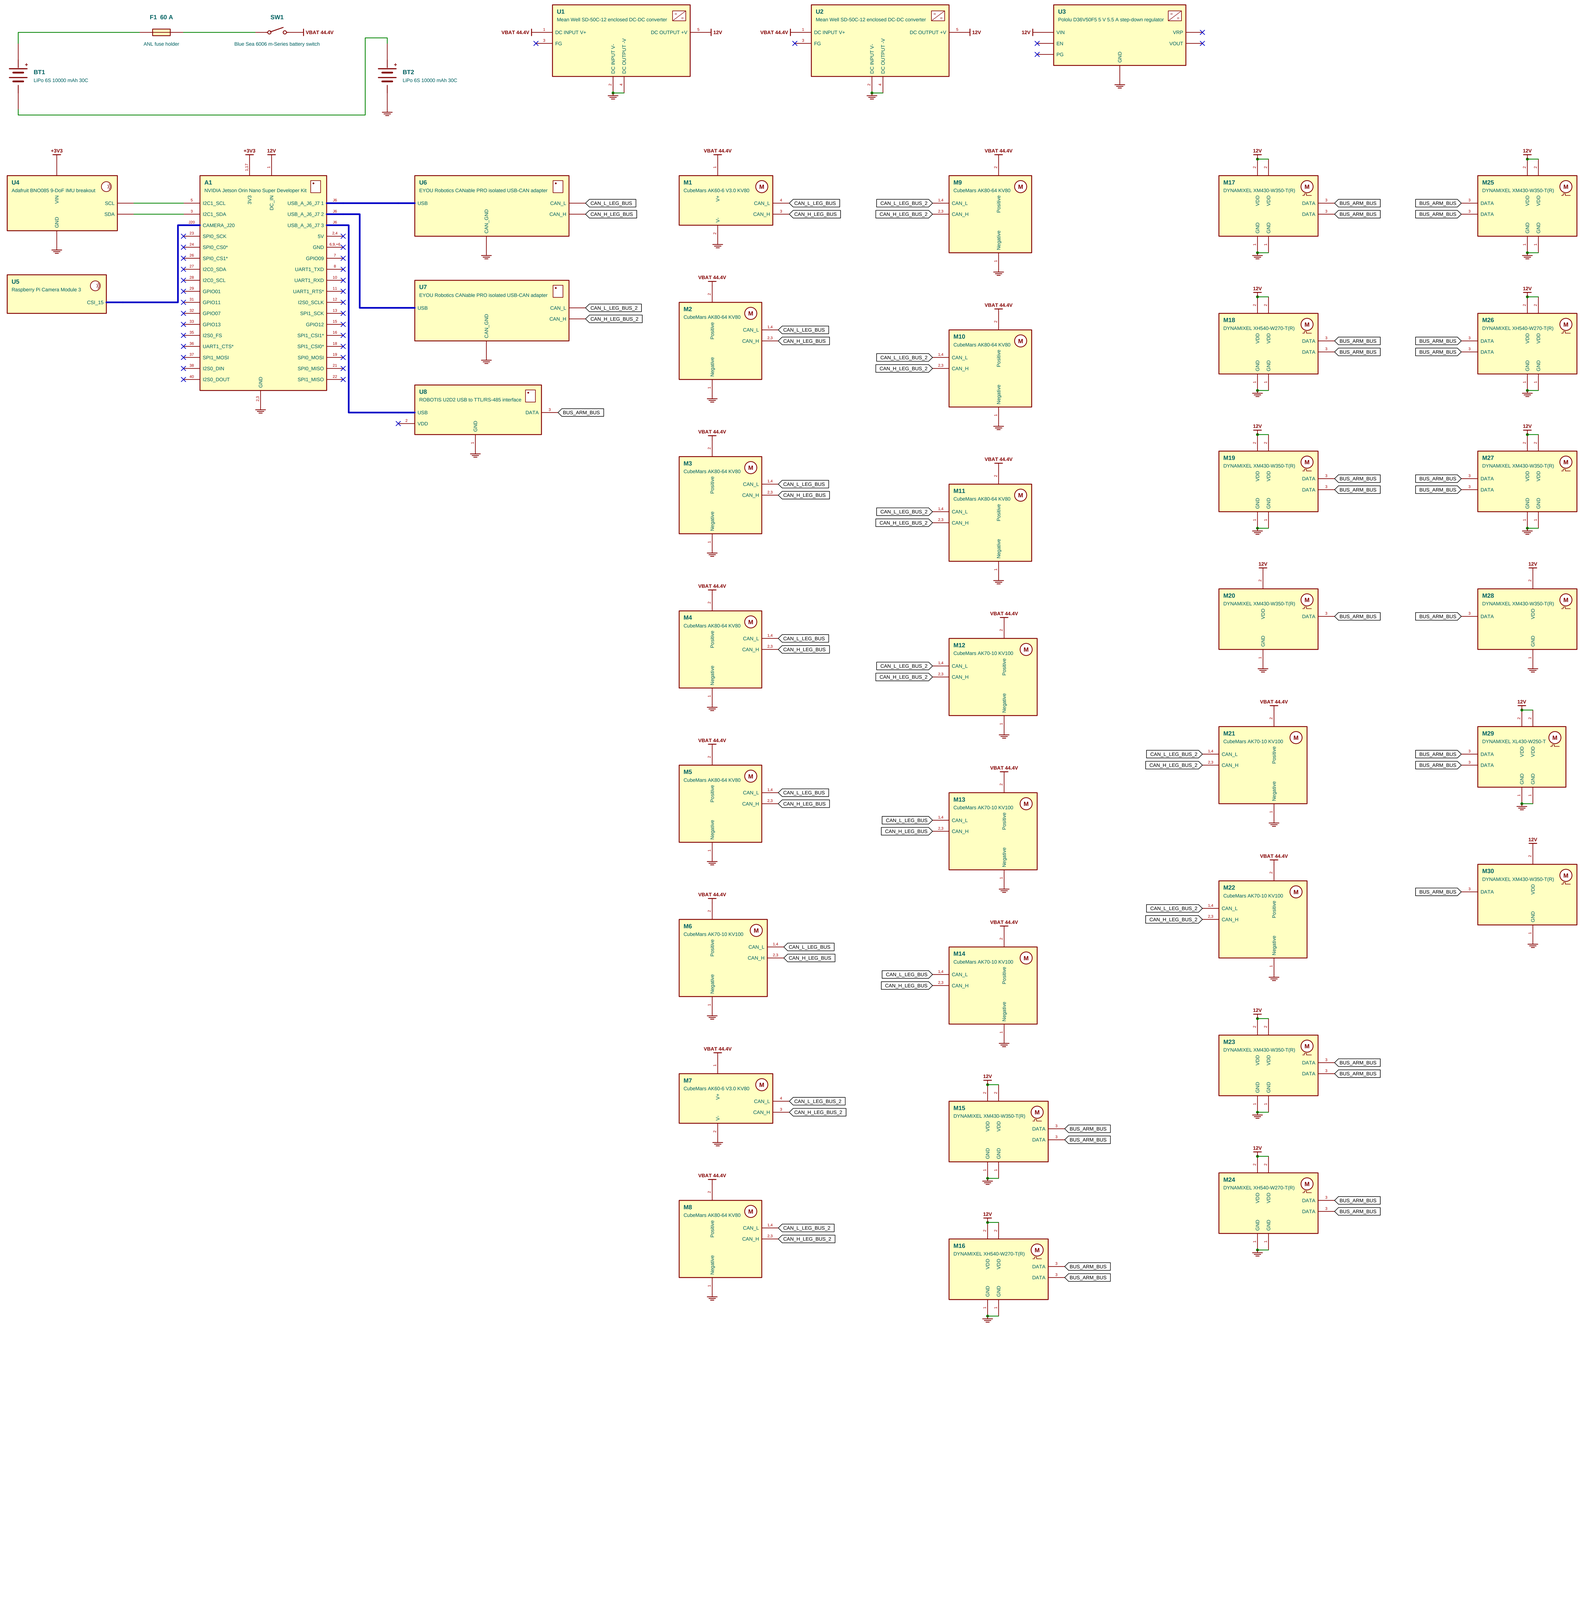


Power rails

VBAT 44.4 V from SW1; load 17.73 A typical, 106.21 A peak; source 120 A cont; 240 A peak; fuse 60 A.

12V 12 V from U1; load 3.85 A typical, 8.45 A peak; source 8.4 A cont, 8.8 A peak

5V 5 V from U3; load 0 A typical, 0 A peak; source 5.5 A cont, 8 A peak

Fuses: F1 60 A (everything on VBAT), F2 2 A (branch dcdc_12v), F3 2 A (branch dcdc_12v_2), F4 7.5 A (branch l_hip_yaw_actuator), F5 10 A (branch l_hip_roll_actuator), F6 10 A (branch l_hip_pitch_actuator), F7 10 A (branch l_knee_actuator), F8 10 A (branch l_ankle_pitch_actuator), F9 15 A (branch l_ankle_roll_actuator), F10 15 A (branch l_shoulder_pitch_actuator), F11 15 A (branch l_shoulder_roll_actuator), F12 7.5 A (branch r_hip_yaw_actuator), F13 10 A (branch r_hip_roll_actuator), F14 10 A (branch r_hip_pitch_actuator), F15 10 A (branch r_knee_actuator), F16 10 A (branch r_ankle_pitch_actuator), F17 15 A (branch r_ankle_roll_actuator), F18 15 A (branch r_shoulder_pitch_actuator), F19 15 A (branch r_shoulder_roll_actuator). Branch fuses sit inline in the lead they protect.

Lever splices (leg_bus_hub_h, leg_bus_hub_l, leg_bus_2_hub_h, leg_bus_2_hub_l, arm_bus_hub, star_ground, splice_vbat, splice_12v) are junctions of their nets.

Same net label or power symbol = same conductor. X = pin not connected.

Declared, no pins: 5V

Text to Robot — generated from design.wiring

Title: **battle_mech: schematic**

51 parts, 17 nets, 140 wires, 3 rails

Size: A0	Rev: f8d875a2e	Sheet 1 / 1
File: schematic.svg	KiCad symbol style	Id: 1/1