

## Male Connector: Side View

- Socket headers inserted, glued, and press fit into place
- Header pins cut to size and inserted
- 22 gauge wire with receptacles attached (heatshrink)






# Male Connector: Pin / Front View



## Female Connector: Receptacle / Front View

- 22 gauge wire with receptacles attached

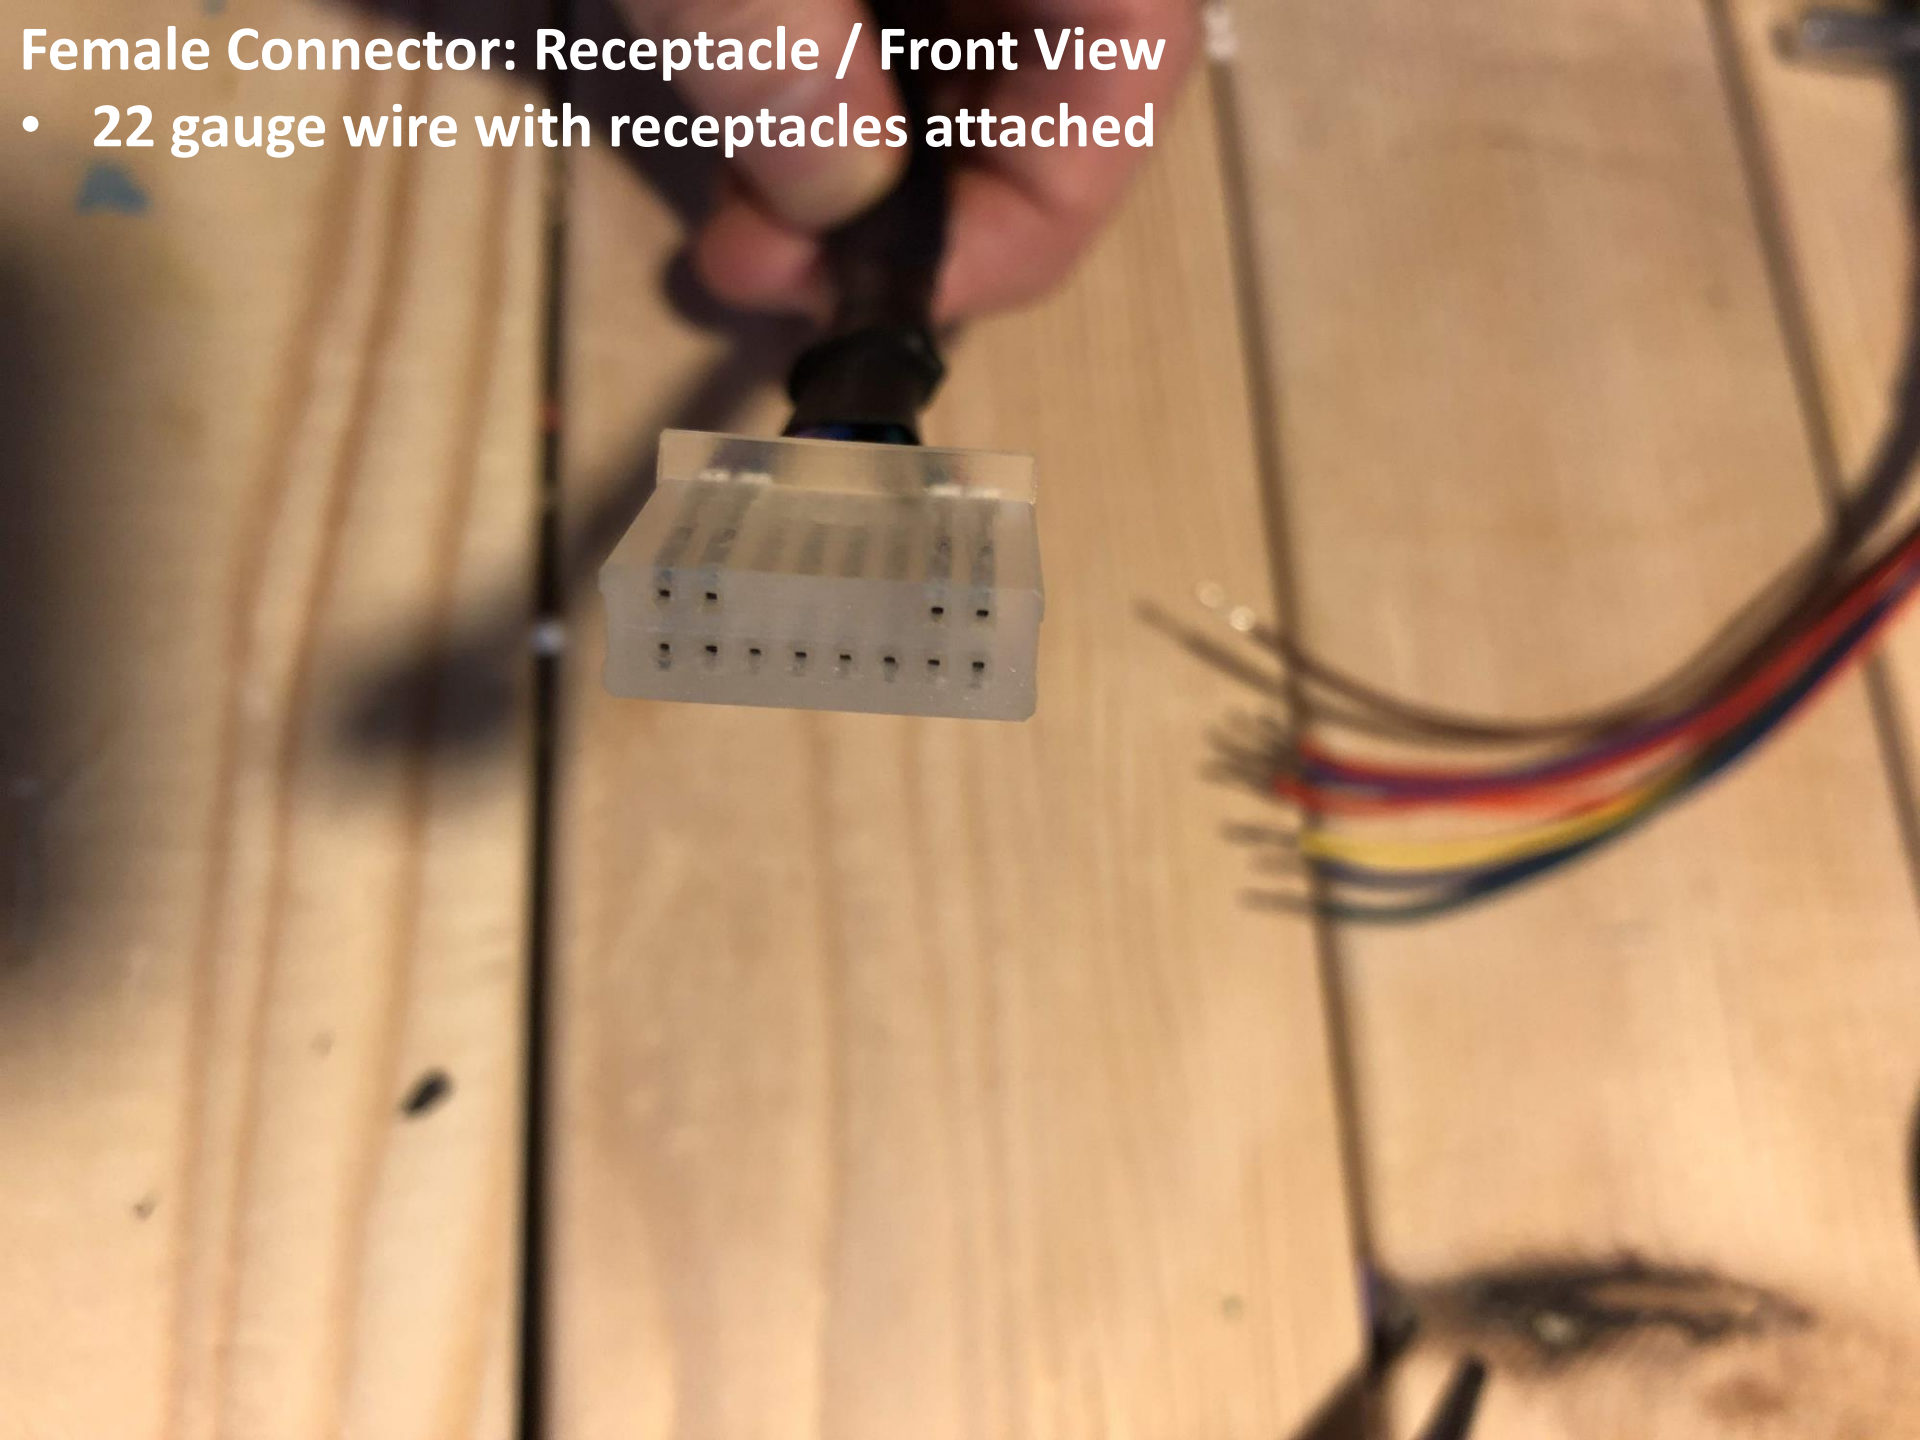



# Male and Female Connector: Side View

- Final Product

