


The Quantizer

Melodies


Audio
Control Voltage
Trigger / Gate

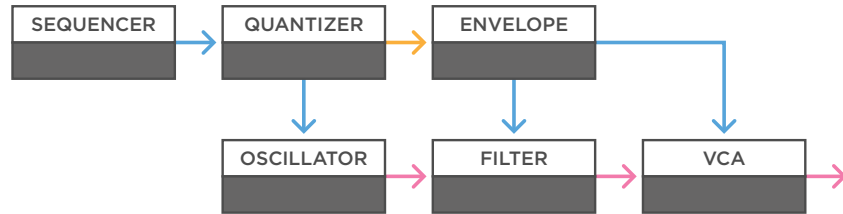

(a)

a - If you have a modular sequencer that outputs linear control voltages, you can send its sequence to a quantizer to turn it into a quantized sequence. Send that to an oscillator and use the quantizer's trigger output to trigger an envelope to shape the filter and VCA in a simple voice.

MONOTRAIL TECH TALK

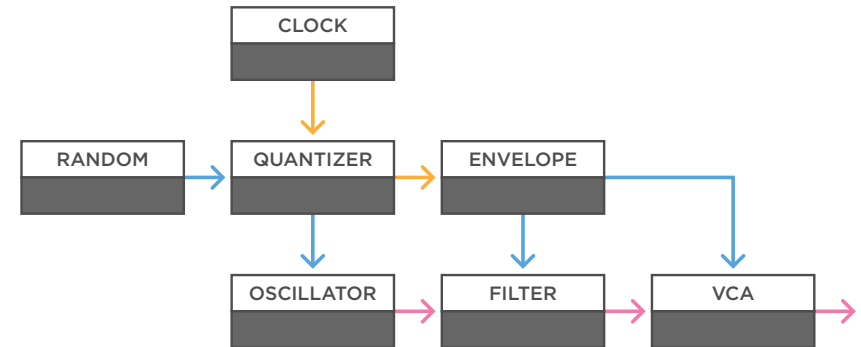

(b)


b - However, in a modular system you can feed all kinds of voltages into a quantizer to create melodies. You can just use noise or a random voltage to create completely unpredictable melodies. In this case you have to expand your patch with a modular clock to trigger the quantizer, in order to create tempo-synced melodic changes.

The Quantizer

Melodies

MONOTRAIL TECH TALK

- Audio
- Control Voltage
- Trigger / Gate

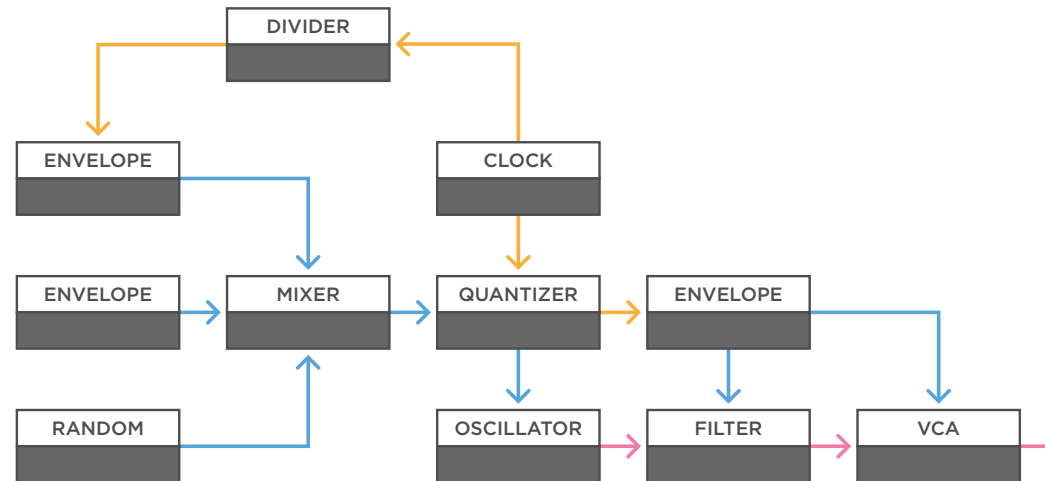

(a)

a - You can also experiment with looping envelopes or free running LFOs, and make this setup as complex as you like. For example, you can take an un-synced looping envelope, a synced envelope triggered by a slower division from a clock divider, and a random source. Send all three signals to a mixer and feed the result to the quantizer.

By mixing the signals by hand, you can create variations in your patterns. From using the tempo synced envelope, to the free running one, to complete random. And you can of course also use interesting mixtures of those signals. This is very interesting when you're performing longer ambient or drone pieces.

The Quantizer

Triggers

- Audio
- Control Voltage
- Trigger / Gate




(a)

a - If a quantizer has a trigger input and output, you can experiment with those. For example, a simple slow random voltage into the CV input, will result into an outcoming trigger whenever the voltage changes enough. Now the quantizer functions as a random trigger generator.

MONOTRAIL

TECH TALK

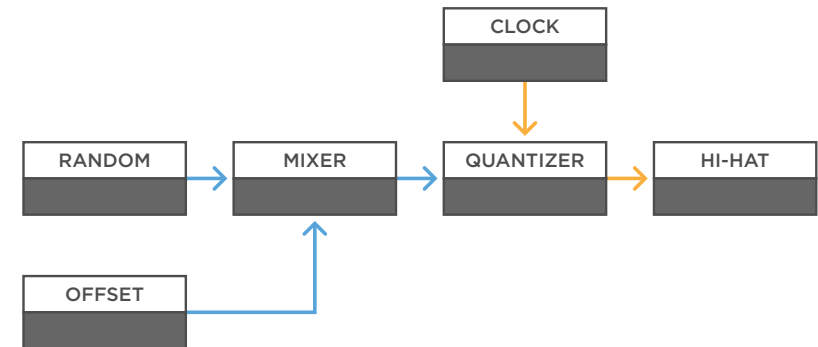


(b)

b - When you send the random voltage through a mixer, you can attenuate the random signal and mix it with offset if you like. This way you can control the amount of random triggers the quantizer generates. And if you like to create tempo synced triggers, all you have to do is add a modular clock to the trigger input of the quantizer.

The Quantizer


Control voltage

Audio
Control Voltage
Trigger / Gate

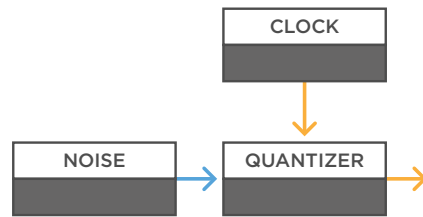

(a)

a - The quantizer can also function somewhat similar to a sample & hold module. For example, feed it noise and a clock, to create a tempo synced stepped sequence. Or use a looping rising envelope to create a stair-case signal.

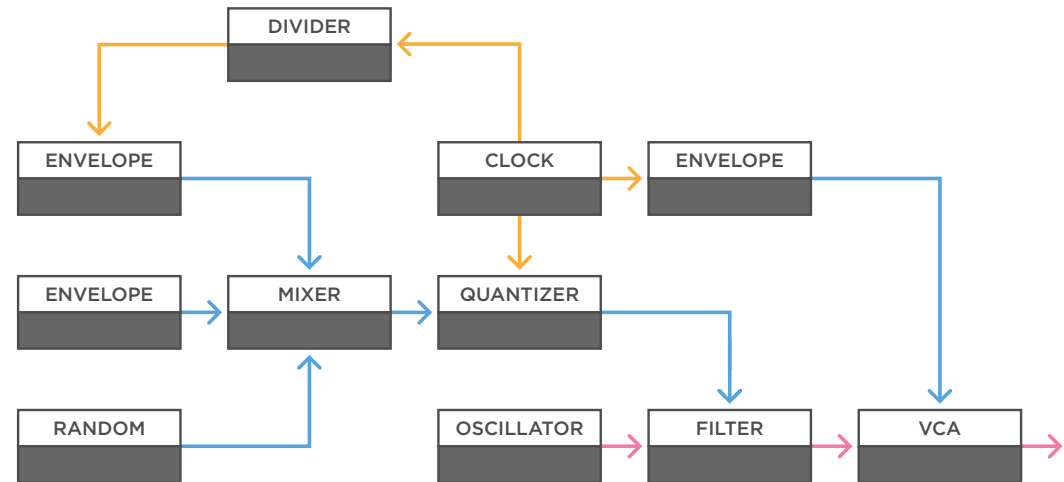

(b)

b - You can make this patch as complex as you like. For example, you can use a setup similar to the one we created before, with two envelopes and a random source. But instead of feeding the result to an oscillator, we send it to the filter in that voice. Now we can use the mixer to mix and control patterns that change the dynamic of the sound, instead of the pitch.