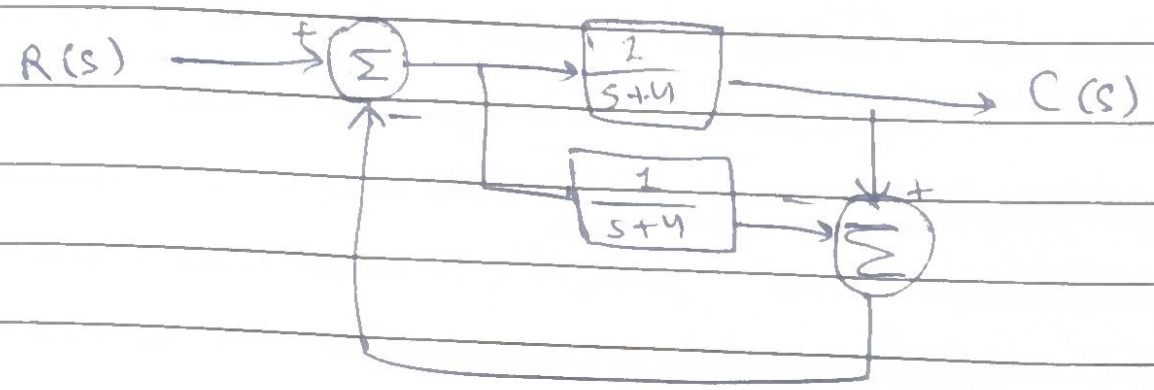


Let output of first summing junct^n be E(s)

Also ⇒ Both block receive same input E(s)

Upper block $C(s) = \frac{E(s)}{s+4}$

Lower block

(Let ~~output~~ be X(s)) $X(s) = \frac{E(s)}{s+4}$

Feed back input $F(s) = C(s) - X(s)$

$F(s) = 0$

Also $E(s) = R(s) - F(s)$

$\Rightarrow E(s) = R(s)$

$\therefore C(s) = \frac{E(s)}{s+4}$

$\Rightarrow C(s) = \frac{R(s)}{s+4}$

$\Rightarrow \boxed{\frac{C(s)}{R(s)} = \frac{1}{s+4}}$