




fan data

13.02.2025

version FANselect V 1.01 (250206), AMCA V 1.03 September, 2021
RLT V 1.00 Dezember, 2021 / 1.25.02.06 | 856 | (user hopes)

1



type	GR50I-ZID.GG.CR
article no.	116904/A01 Portfolio STD-WW

technical data

motor	ECblue
Efficiency class	IE5
mains supply	- 3~ 400V 50Hz
ambient temperature, max. limit (t _a)	°C 55
efficiency grade η_{statA}	% 75,2
efficiency grade N_{actual} N_{target}	80,0 62
ErP-conformity	2015 EC controller integrated
grille influence	no

fan data

fan speed (n) max. (n _{max})	1/min - 1950
frequency (f _{DP}) (f _{max})	Hz 50 60
dimensions (w x h x d)	mm 670 x 670 x 507
product weight (m _{pr})	kg 49
k-factor nozzle pres. (k)	- 280

PF:PF_50; Mult.Fan:2; Ano:116904; STol:±-10 %





FANselect

performance curve / acoustics

13.02.2025


Version: FANselect V 1.01 (250206), AMCA V 1.03 September, 2021
RLT V 1.00 Dezember, 2021 / 1.25.02.06 | 856 | (user hopes)

- 1


GR50I-ZID.GG.CR

116904/A01 | Portfolio
STD-WW
- measured in standard nozzle in installation type A according to ISO 5801
measurement density 1.19 [kg/m³]


air performance p_{sF}

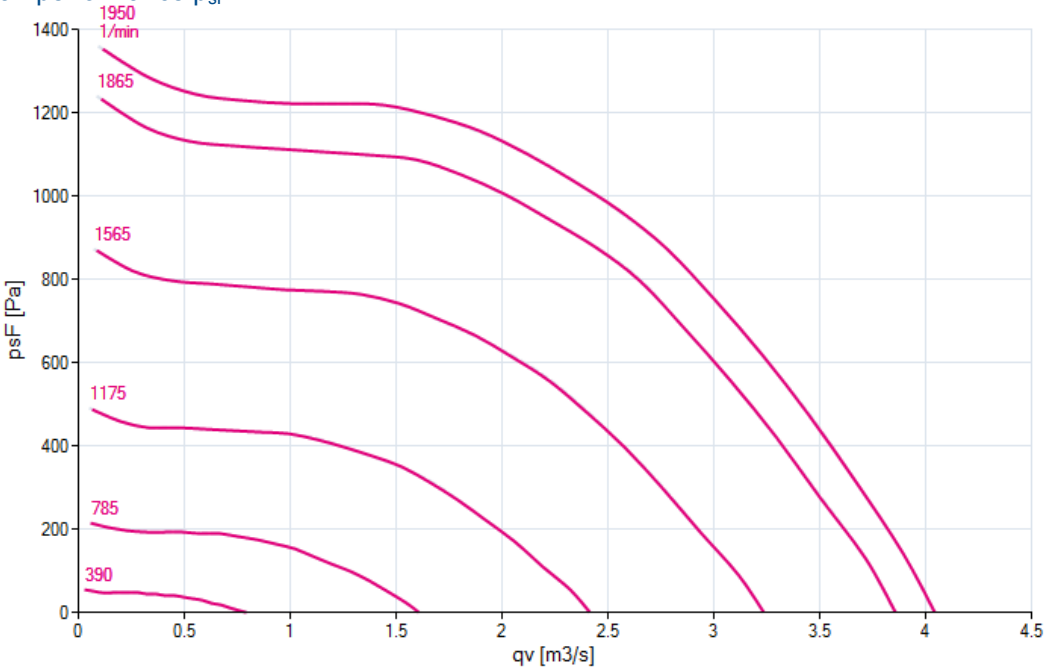

acoustics ($L_{w(A),5}$)

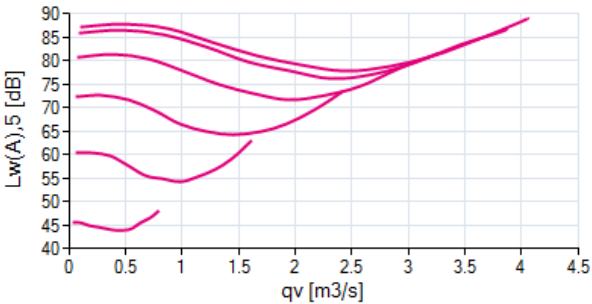

acoustics ($L_{w(A),6}$)

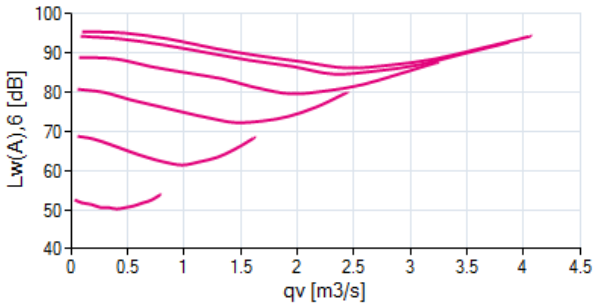

1 GR50I-ZID.GG.CR

f [Hz]	sum	63	125	250	500	1000	2000	4000	8000
$L_{w(A),5}$	-	-	-	-	-	-	-	-	-
$L_{w,5}$	-	-	-	-	-	-	-	-	-

f [Hz]	sum	63	125	250	500	1000	2000	4000	8000
$L_{w(A),6}$	-	-	-	-	-	-	-	-	-
$L_{w,6}$	-	-	-	-	-	-	-	-	-





efficiency grade / power input

13.02.2025

Version FANselect V 1.01 (250206), AMCA V 1.03 September, 2021
RLT V 1.00 Dezember, 2021 / 1.25.02.06 | 856 | (user hopes)


- 1

GR50I-ZID.GG.CR


116904/A01 | Portfolio
STD-WW

measured in standard nozzle in installation type A according to ISO 5801
measurement density 1.19 [kg/m³]


efficiency grade $\eta_{F,sys}$

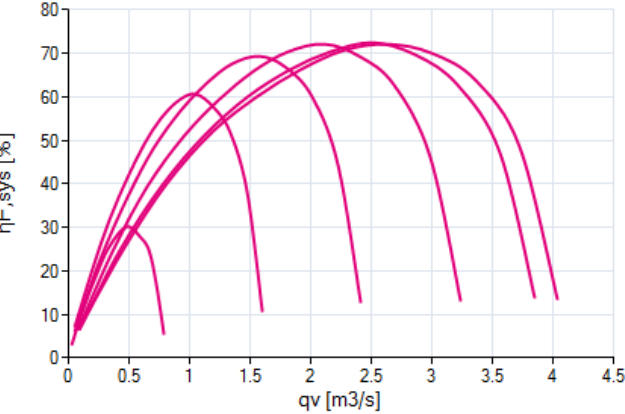

efficiency grade $\eta_{sF,sys}$

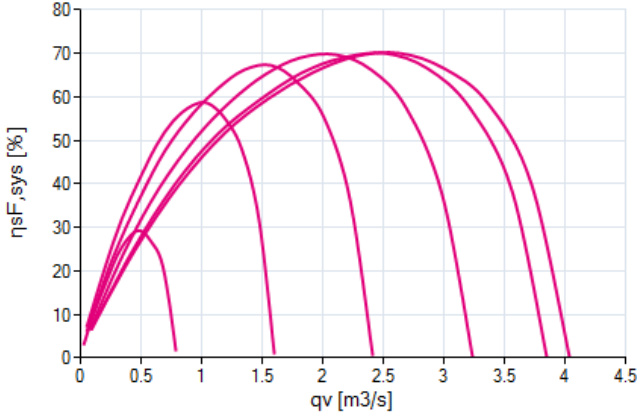

power input P_{sys}

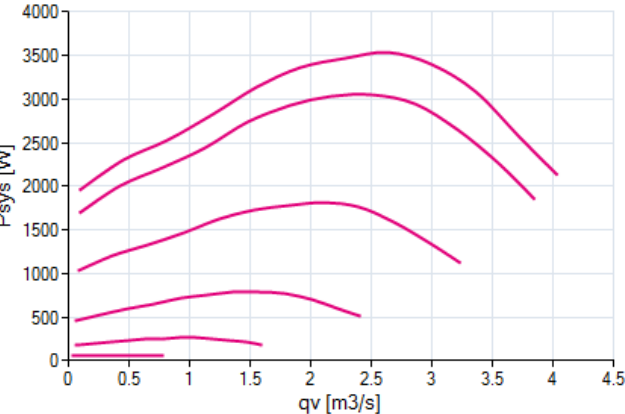




FANselect

nominal values

13.02.2025

version FANselect V 1.01 (250206), AMCA V 1.03 September, 2021
RLT V 1.00 Dezember, 2021 / 1.25.02.06 | 856 | (user hopes)

1



GR50I-ZID.GG.CR
116904/A01


3~ 380-480V 50Hz P1 3.50kW
5.60-4.40A 1950/MIN 55°C
3~ 380-480V 60Hz P1 3.50kW
5.60-4.40A 1950/MIN 55°C
IP55 THCL155

drawing

13.02.2025

version FANselect V 1.01 (250206), AMCA V 1.03 September, 2021
RLT V 1.00 Dezember, 2021 / 1.25.02.06 | 856 | (user hopes)

1



GR50I-ZID.GG.CR
116904/A01

