




fan data

13.02.2025

version FANselect V 1.01 (250206), AMCA V 1.03 September, 2021
RLT V 1.00 Dezember, 2021 / 1.25.02.06 | 856 | (user hopes)

1



type	GR56I-ZID.GL.CR
article no.	116908/A01 Portfolio STD-WW

technical data

motor	ECblue
Efficiency class	IE5
mains supply	- 3~ 400V 50Hz
ambient temperature, max. limit (t _r)	°C 40
efficiency grade η_{statA}	% 75,7
efficiency grade N_{actual} N_{target}	79,3 62
ErP-conformity	2015 EC controller integrated
grille influence	no

fan data

fan speed (n) max. (n _{max})	1/min - 1780
frequency (f _{DP}) (f _{max})	Hz 50 60
dimensions (w x h x d)	mm 730 x 730 x 575
product weight (m _{pr})	kg 59
k-factor nozzle pres. (k)	- 355

PF:PF_50; Mult.Fan:2; Ano:116908; STol:±-10 %



FANselect

performance curve / acoustics

13.02.2025


Version: FANselect V 1.01 (250206), AMCA V 1.03 September, 2021
RLT V 1.00 Dezember, 2021 / 1.25.02.06 | 856 | (user hopes)

- 1


GR56I-ZID.GL.CR

116908/A01 | Portfolio
STD-WW
- measured in standard nozzle in installation type A according to ISO 5801
measurement density 1.15 [kg/m³]


air performance p_{sF}

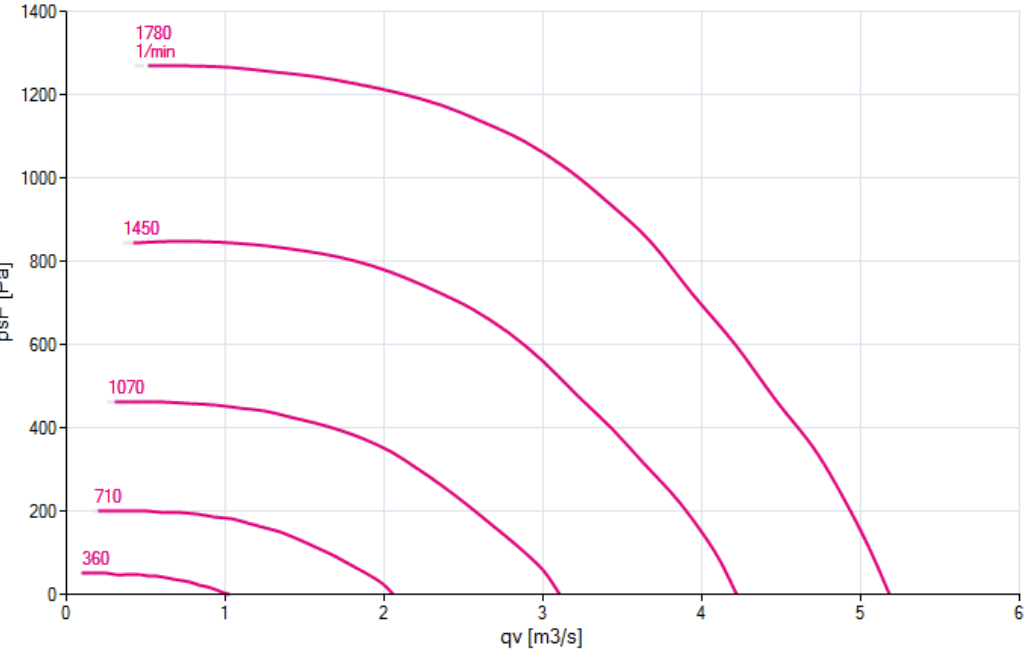

acoustics ($L_{w(A),5}$)

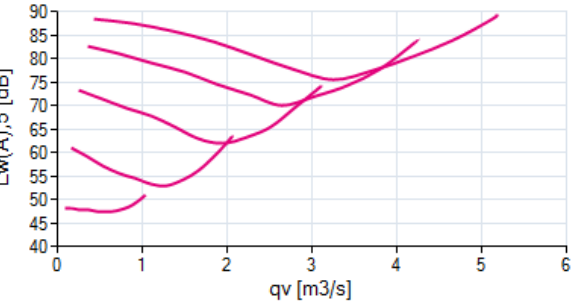

acoustics ($L_{w(A),6}$)

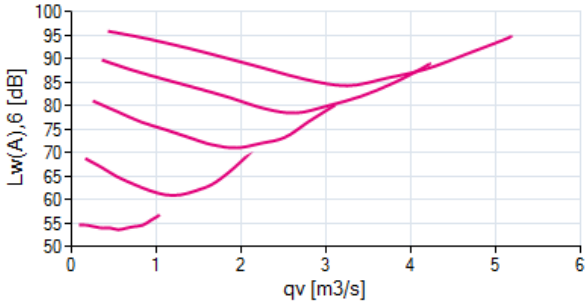

1 GR56I-ZID.GL.CR

f [Hz]	sum	63	125	250	500	1000	2000	4000	8000
$L_{w(A),5}$	-	-	-	-	-	-	-	-	-
$L_{w,5}$	-	-	-	-	-	-	-	-	-

f [Hz]	sum	63	125	250	500	1000	2000	4000	8000
$L_{w(A),6}$	-	-	-	-	-	-	-	-	-
$L_{w,6}$	-	-	-	-	-	-	-	-	-



efficiency grade / power input

13.02.2025

Version FANselect V 1.01 (250206), AMCA V 1.03 September, 2021
RLT V 1.00 Dezember, 2021 / 1.25.02.06 | 856 | (user hopes)


- 1

GR56I-ZID.GL.CR


measured in standard nozzle in installation type A according to ISO 5801
- 116908/A01 | Portfolio

measurement density 1.15 [kg/m³]
- STD-WW


efficiency grade $\eta_{F,sys}$

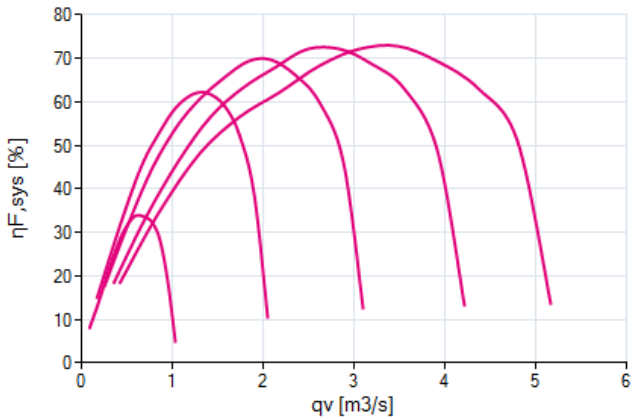

efficiency grade $\eta_{sF,sys}$

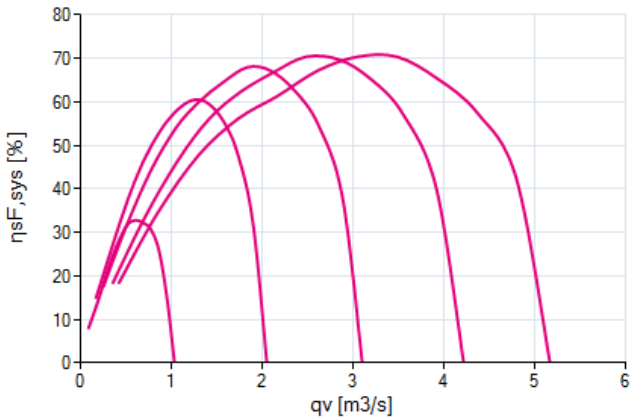

power input P_{sys}

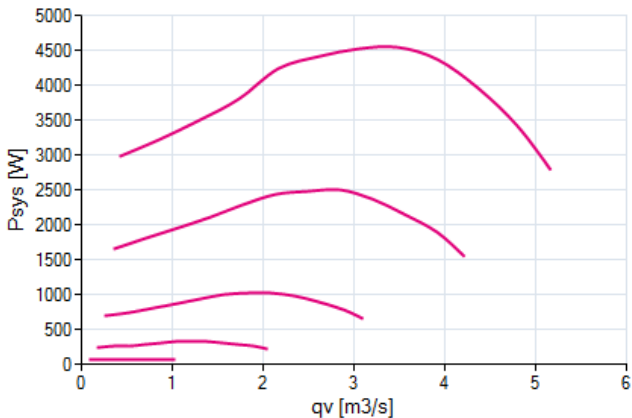




FANselect

nominal values

13.02.2025

version FANselect V 1.01 (250206), AMCA V 1.03 September, 2021
RLT V 1.00 Dezember, 2021 / 1.25.02.06 | 856 | (user hopes)

1



GR56I-ZID.GL.CR
116908/A01


3~ 380-480V 50Hz P1 4.60kW
7.40-5.80A 1780/MIN 40°C
3~ 380-480V 60Hz P1 4.60kW
7.40-5.80A 1780/MIN 40°C
IP55 THCL155

drawing

13.02.2025

version FANselect V 1.01 (250206), AMCA V 1.03 September, 2021
RLT V 1.00 Dezember, 2021 / 1.25.02.06 | 856 | (user hopes)

1



GR56I-ZID.GL.CR
116908/A01

