




PC CONTROLLED DIGITAL To ANALOG CONVERTER

MICROLINE INDIA

Microlineindia@gmail.com
+91 8777384302

Microline India proudly presents multichannel, PC controlled Digital to Analog converter. Developed in-house it uses high quality components and provide an excellent price to performance ratio

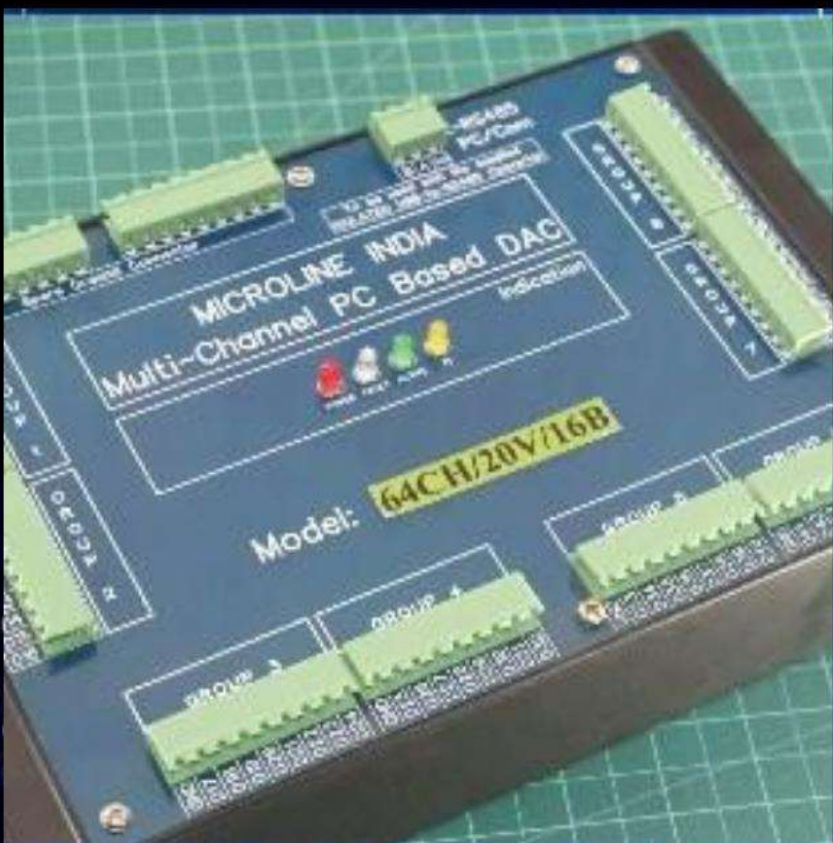


It features 64 channels of output in the range of 0 to 20 volts or -10 to +10 volts in 16 bit resolution. The output channels can drive up to 20ma each. Other voltage ranges and current ranges can be customised as per requirement.

The Integral Non Linearity is ± 1 LSB maximum at 16-bit resolution. The Total Unadjusted Error is less than $\pm 0.1\%$ of Full Scale Range. Highly accurate temperature compensated reference voltage ensures stable operation and specified monotonic operation.

All the outputs are reset during power on ensuring stable known state.

Outputs are grouped in Eight by Eight 5.08mm pitched pluggable screw terminals for easy hot swappable connection.

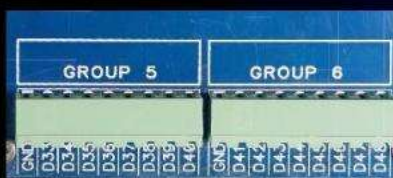

Each group have a dedicated ground pin. There is also provision for spare ground terminals should the user require it.

Operational and PC communication status are indicated by onboard led. TVS diodes at the output protect the DAC from inductive voltage spikes that can occur on long wires. Thermal overload due to DAC short circuit is sensed using internal temperature indicators and shuts down the system to prevent permanent damage.



PC Control is achieved via a simple software interface and data is exchanged via an isolated RS485 port. The isolation makes sure that EMI and Interference from the PC side is not mitigated into the DAC circuitry. It also solves ground return problems.

GROUP 1 & 2

CH 01

9991

OK

CH 02

500

OK

CH 03

500

OK

CH 04

500

OK

CH 05

500

OK

CH 06

500

OK

CH 07

500

OK

CH 08

500

OK

CH 09

500

OK

CH 10

500

OK

CH 11

500

OK

CH 12

500

OK

CH 13

500

OK

CH 14

500

OK

CH 15

500

OK

CH 16

500

OK

GROUP 3 & 4

CH 17

500

OK

CH 18

500

OK

CH 19

500

OK

CH 20

500

OK

CH 21

500

OK

CH 22

500

OK

CH 23

500

OK

CH 24

500

OK

CH 25

500

OK

CH 26

500

OK

CH 27

500

OK

CH 28

500

OK

CH 29

500

OK

CH 30

500

OK

CH 31

500

OK

CH 32

500

OK

GROUP 5 & 6

CH 33

500

OK

CH 34

500

OK

CH 35

500

OK

CH 36

500

OK

CH 37

500

OK

CH 38

500

OK

CH 39

500

OK

CH 40

500

OK

CH 41

500

OK

CH 42

500

OK

CH 43

500

OK

CH 44

500

OK

CH 45

500

OK

CH 46

500

OK

CH 47

500

OK

CH 48

500

OK

GROUP 7 & 8

CH 49

500

OK

CH 50

500

OK

CH 51

500

OK

CH 52

500

OK

CH 53

500

OK

CH 54

500

OK

CH 55

500

OK

CH 56

500

OK

CH 57

500

OK

CH 58

500

OK

CH 59

500

OK

CH 60

500

OK

CH 61

500

OK

CH 62

500

OK

CH 63

500

OK

CH 64

500

OK

DAC Control

COM1

115200

Connect

Disconnect

File name

File Import

File Export

Start

Manual Update

ALL CH ON

ALL CH OFF

500

ALL CH SET

ALL CH RESET

DAC all channel turn off...

MICROLINE INDIA

Multi-Channel PC Based DAC

Indication

Model: 64CH/20V/16B

GROUP 1

GROUP 2

GROUP 3

GROUP 4

GROUP 5

GROUP 6

RS485

PC/Com

To be used with the supplied MAX485-122-12-25485 Converter

owon

SDM241

55,000

Counts

09.991

VDC

Range

Auto

Auto

200

Technical Specification: -

PARAMETER	RATING
Output type	Voltage
Output Range	0 to 20 volts or -10 to +10 volts
Maximum Power Consumption (Watt)	800W
O/P Channels ***	64***
O/P Channels separately addressable	64
Control Interface Capabilities	RS-485 interface & MATLAB
Address Range	1 to 64 using PC software
Maximum Output Current per Channel	20 mA
Output Short circuit protection	Available
Output Connector	5.08 mm pitched pluggable screw terminals
Interface Capabilities	Isolated RS485 port

*** We can change or add various features according to the customer's requirement, the number of channels can be expanded from 50 to 1024.

email - info@microlineindia.in ; microlineindia@gmail.com

Website: www.microlineindia.in

Mobile: **+91-9874790272, +91-8777384302**