

TABLE OF CONTENTS

TABLE OF CONTENTS	1
1- INTRODUCTION	2
2- HOW TO BYPASS THE EMERGENCY STOP FUNCTION	2
REVISION HISTORY	4

Description- The Full-Size PDU is a two-bay cabinet and the Compact PDU is a single-bay cabinet. Procedures for the Full-Size PDU do not apply to the Compact PDU.

1- INTRODUCTION

The emergency stop circuit is a normally closed loop that originates at the PDU control board. Relay coil K41 is normally energized through the loop by the PDU +24Vdc power supply. If the loop is opened by pushing an Emergency Stop button on the operator work space keyboard, or the magnet enclosure, the gradient driver cabinets (including the GRAM cabinet) and the RF/Pen cabinet lose power. If this is not desired for test or troubleshooting purposes, the emergency stop circuit can be bypassed.

This procedure allows the user to power up portions of the system without invoking the emergency stop function. If any of the components in the emergency stop loop are missing, a jumper must be substituted in place of the missing component before PDU checks are performed. This jumper must be replaced by a proper cable prior to normal system operation.



POSSIBLE PHYSICAL INJURY! PERFORM THIS SECTION PRIOR TO INITIAL POWER UP OF ANY CABINETS. HIGH VOLTAGE HAZARDS MAY EXIST PRIOR TO THE COMPLETION OF THIS PROCEDURE.



FATAL SHOCK HAZARD!! LETHAL VOLTAGES ARE PRESENT WITHIN THE PDU EVEN WHEN ALL PDU BREAKERS ARE OFF. ENSURE THAT POWER TO THE CABINET IS OFF, LOCKED, AND TAGGED BEFORE PROCEEDING.

Note

This section must be performed ONLY if either the magnet enclosure, operator work space keyboard, system control cabinet, RF / penetration panel, or any of their interconnecting cables are missing or disconnected. Perform this procedure prior to powering up a new Signa installation. Also, perform this procedure before troubleshooting the emergency stop circuit.

2- HOW TO BYPASS THE EMERGENCY STOP FUNCTION

1. Locate 15-pin subminiature D plug within plastic bag taped to PDU.
2. Verify presence of jumper between pins 7 and 8 of the plug (see Illustration L2697A below).

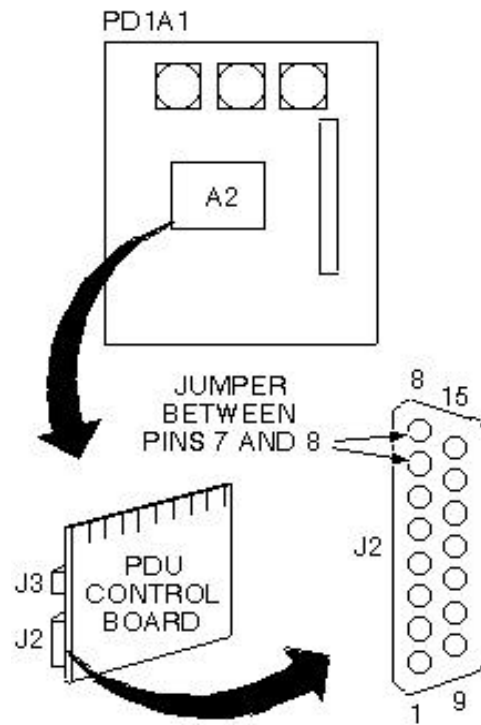


ILLUSTRATION L2697A
EMERGENCY STOP JUMPER

3. Insert plug on J2 of PDU Control Board (PD1A1A2). See Illustration L2697A above.

REVISION HISTORY

REV	DATE	AUTHOR	PRIMARY REASONS FOR CHANGE
0	June16, 1998	M. Whitlow	Initial Conversion from Toolbook to Word.