

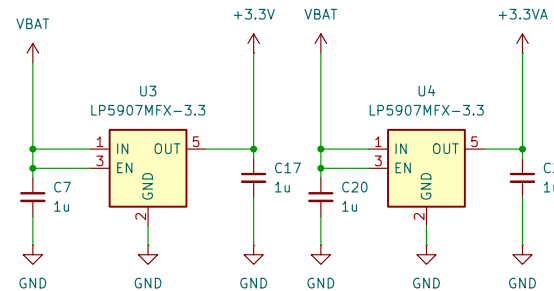


Power

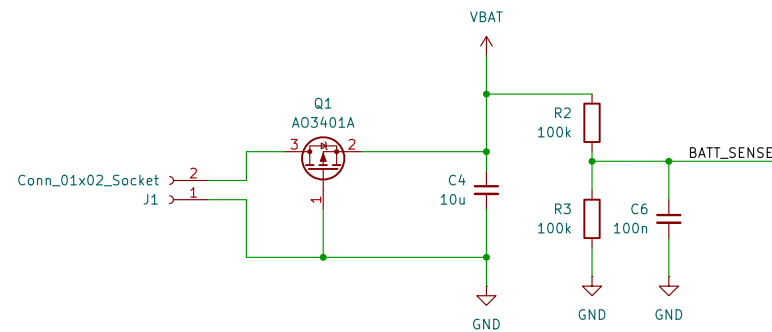



GNSS

The diagram illustrates the electrical connections for the GNSS module (U5, LC86G). The module is powered by a +3.3V supply connected to pins 4 (VCC) and 5 (V_BCKP). A ground connection is provided at pin 7 (GND). The module's communication pins are GNSS_RX (pin 1, RXD), GNSS_TX (pin 2, TXD), and GNSS_PPS (pin 6, 1PPS). Status pins include RESET (pin 10), EX_ANT (pin 11), ADET (pin 8), and a RESERVED pin (pin 9). The module is connected to a power supply and ground through capacitors C27 (10u), C28 (100n), and C30 (33p).

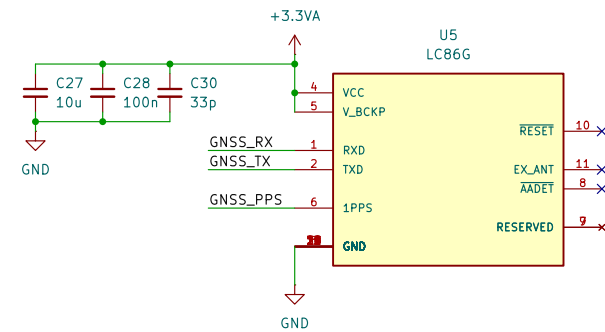

LEDs

The diagram shows a circuit connection for an LED. A green line representing a microcontroller pin is labeled "LED" at its left end. This line extends to the right and then turns downwards to connect to the anode (the longer leg) of a red LED symbol. In series with the LED is a red rectangular component representing a resistor, labeled "R6" and "510R". The cathode (the shorter leg) of the LED is connected to a ground symbol, which is a triangle pointing downwards. This ground connection is labeled "GND".

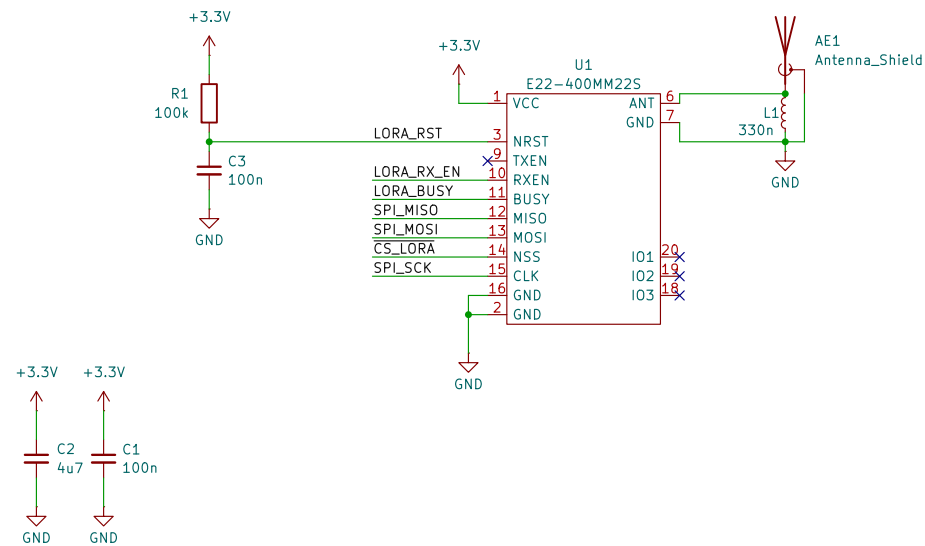[illegible]


Microcontroller

Pin List:

Pin	Signal
2	SPI_SCK
3	CS_LORA
36	BATT_SENSE
35	LORA_RST
4	SPI_MOSI
5	SPI_MISO
6	LORA_BUSY
7	LORA_RX_EN
31	LED
14	GNSS_TX
15	GNSS_RX
22	*P0.16
23	*P0.17
17	GNSS_PPS
34	*P0.20
32	*P0.28
33	*P0.29
33	*P0.30

Component List:

- C31 4u7
- C32 1u
- C33 100n
- C34 100n
- C35 1u
- C36 100p
- C37 100n
- C38 1p0
- C39 1p2
- C26 12p
- C29 12p
- L7 4n7
- L8 2n2
- Y2 32MHz
- Y3
- U6 nRF52820-QDxx

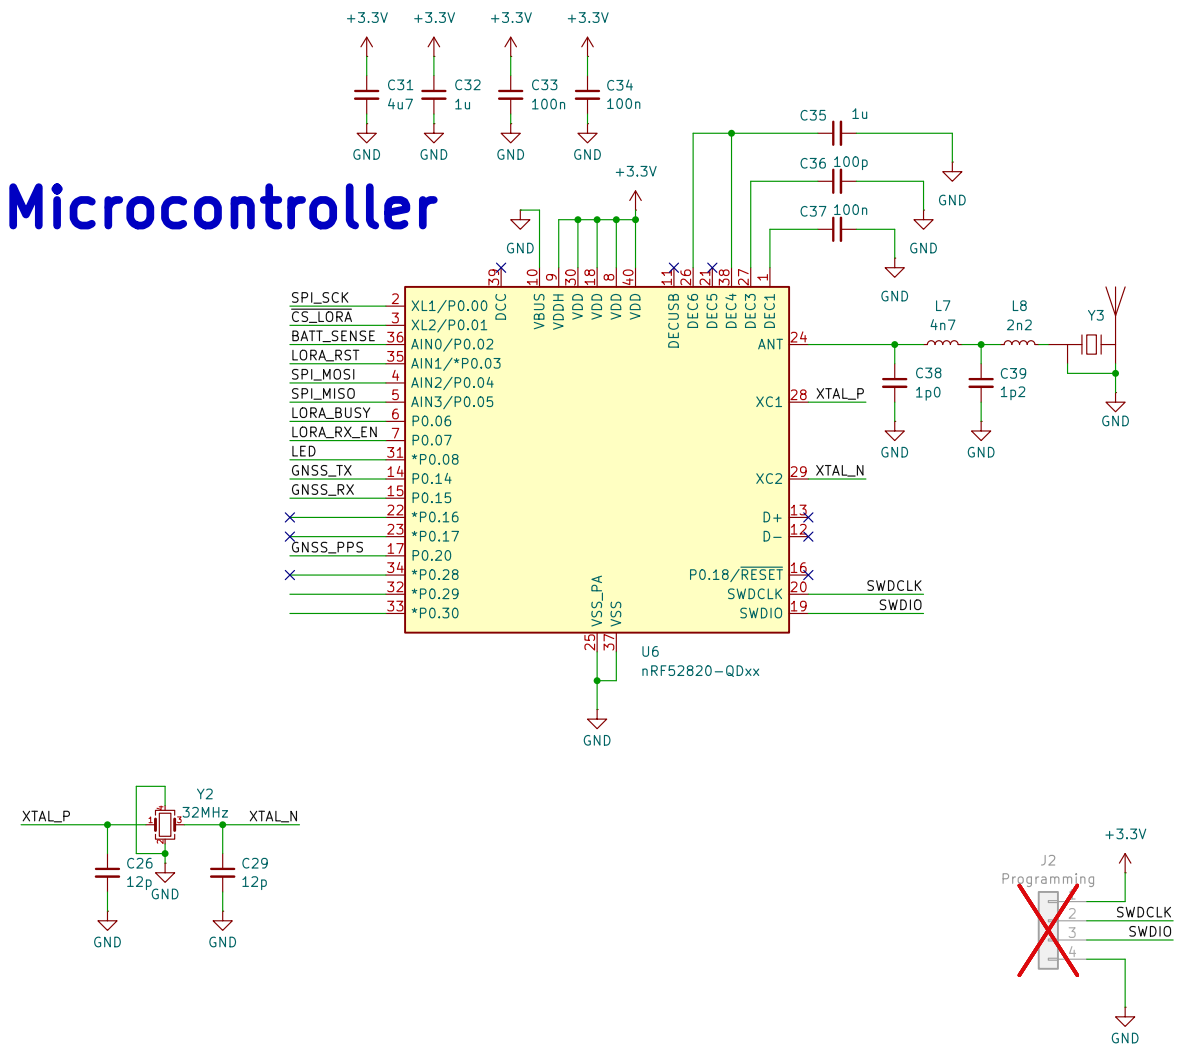

CERN-OHL-W-2.0 license
Blueskin Design Ltd
Sheet: /
File: GPS Tracker.kicad_sch

Title: SimpleTracker

Size: A3

Date: 2025-09-28

KiCad E.D.A. 9.0.2

Rev: 0.4

Id: 1/1