



波片的角度	0°	20°	45°
检偏器角度 α	功率计读数 I (mw)		
0°	0.000	0.157	0.336
10°	0.057	0.163	0.342
20°	0.226	0.273	0.371
30°	0.253	0.301	0.413
40°	0.428	0.407	0.456
50°	0.606	0.523	0.517
60°	0.730	0.637	0.558
70°	0.811	0.830	0.604
80°	0.870	0.816	0.637
90°	0.893	0.810	0.645
100°	0.860	0.785	0.627
110°	0.770	0.737	0.606
120°	0.603	0.660	0.570
130°	0.453	0.562	0.506
140°	0.330	0.451	0.453
150°	0.176	0.321	0.397
160°	0.057	0.237	0.356
170°	0.02	0.163	0.339

波片的角度	0°	20°	45°
检偏器角度 α	功率计读数 I (mw)		
180°	0.000	0.150	0.336
190°	0.032	0.171	0.343
200°	0.197	0.275	0.376
210°	0.246	0.317	0.420
220°	0.437	0.417	0.469
230°	0.615	0.537	0.517
240°	0.738	0.653	0.565
250°	0.818	0.846	0.607
260°	0.892	0.813	0.633
270°	0.906	0.730	0.650
280°	0.878	0.817	0.631
290°	0.767	0.763	0.607
300°	0.625	0.671	0.575
310°	0.437	0.565	0.528
320°	0.336	0.453	0.467
330°	0.186	0.331	0.410
340°	0.067	0.236	0.373
350°	0.010	0.179	0.339

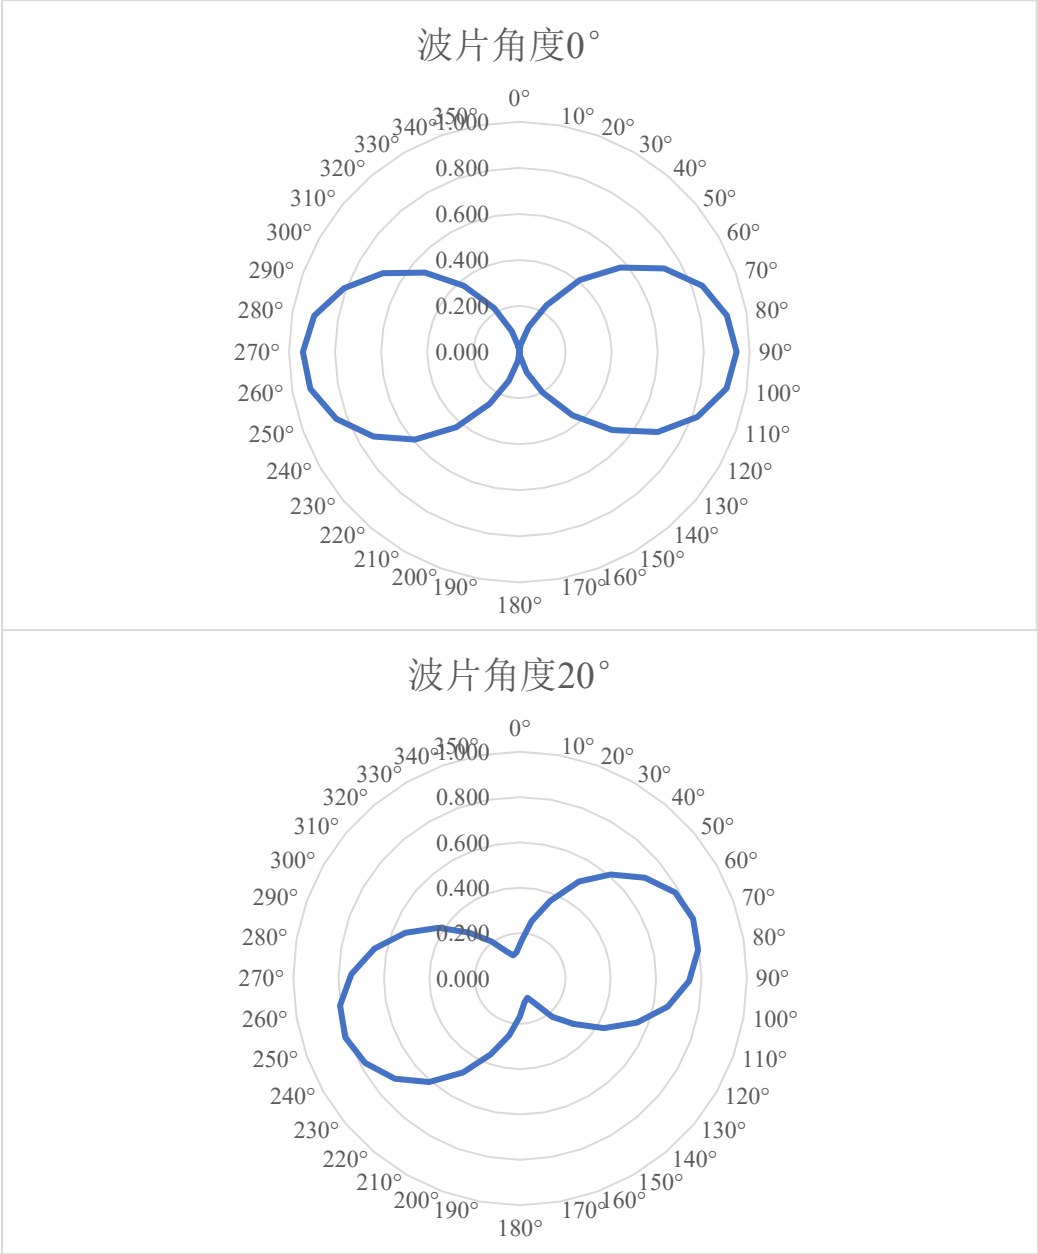

波片角度45°

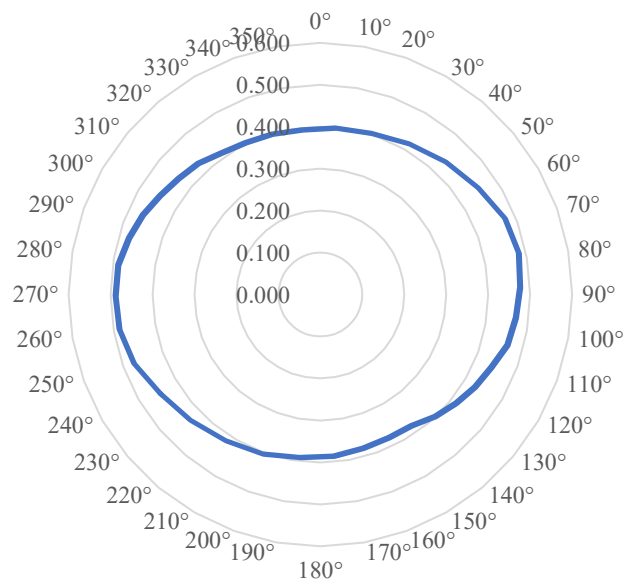

φ (°)	光强 I	$\cos^2\varphi$
90	0.000	0.000
80	0.017	0.030
70	0.093	0.117
60	0.267	0.250
50	0.366	0.413
40	0.567	0.587
30	0.673	0.700
20	0.792	0.883
10	0.873	0.970
0	0.916	1.000

