


Transmitter Nodes

(ESP32 + SX1262 / SX1276)

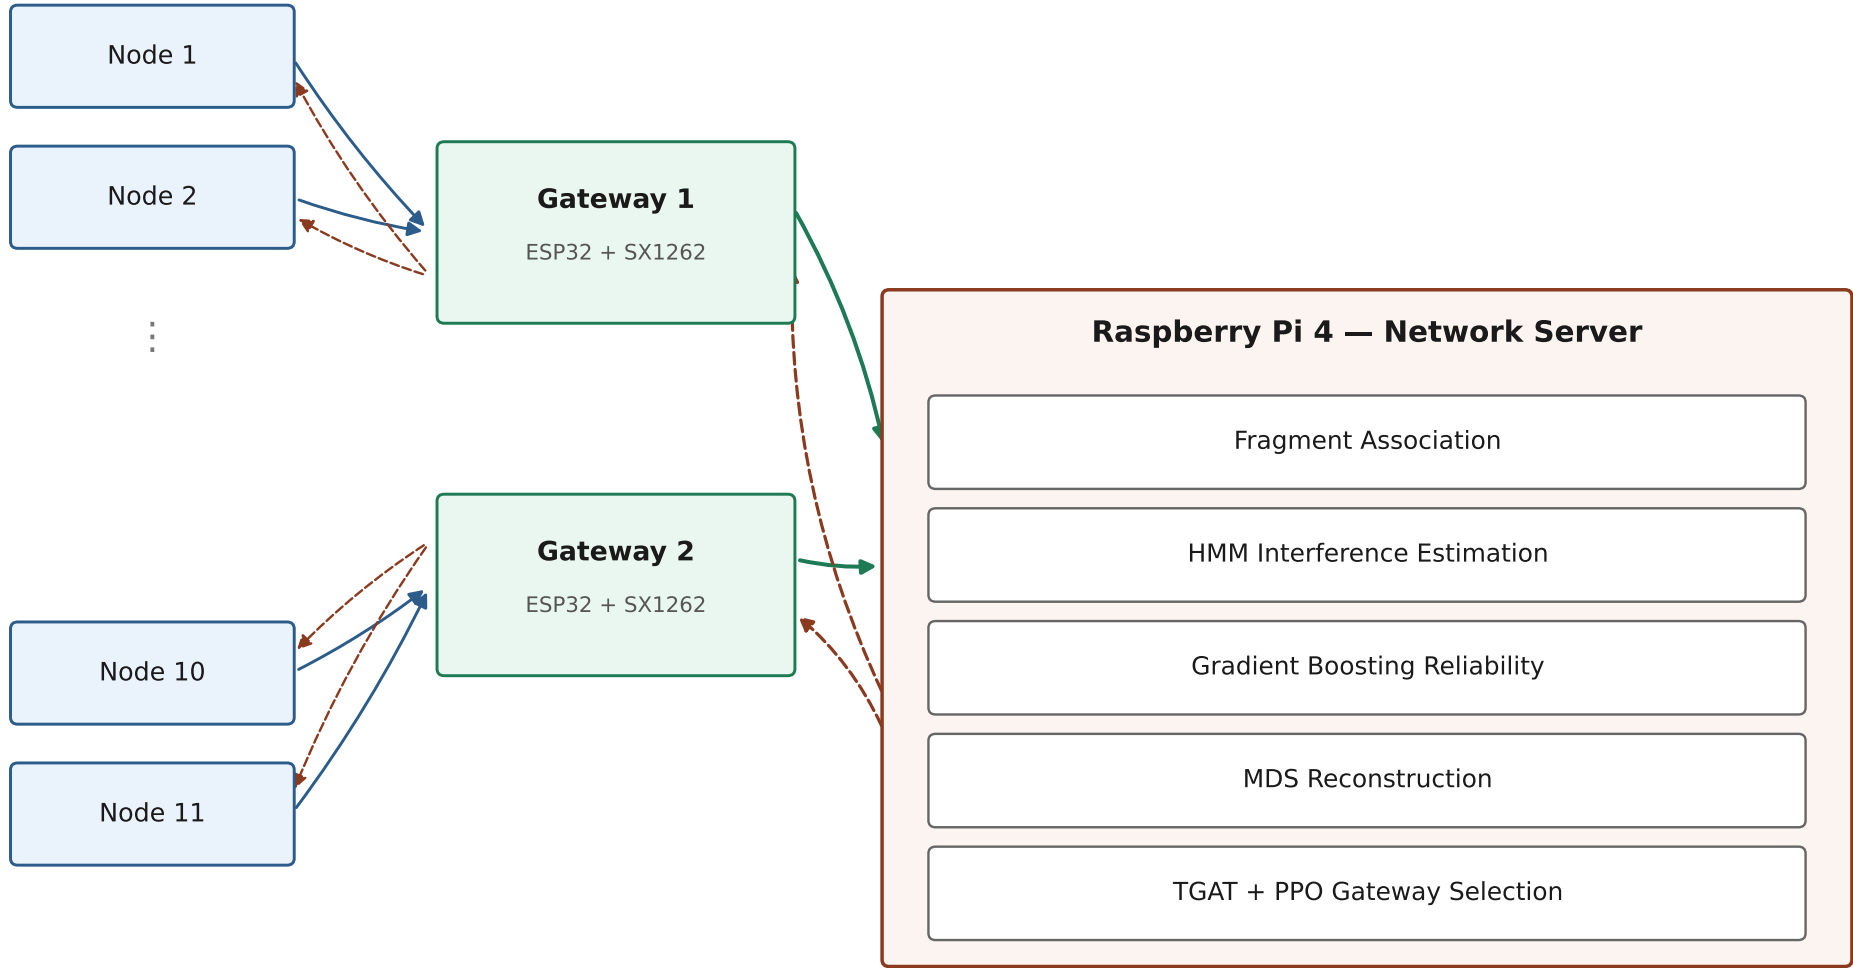

— LoRa RF (fragment uplink) — WiFi/TCP (observation uplink) - - - ACK downlink (D-FRAG feedback)