


IP67

- SF Series IP67
- Push-pull coupling

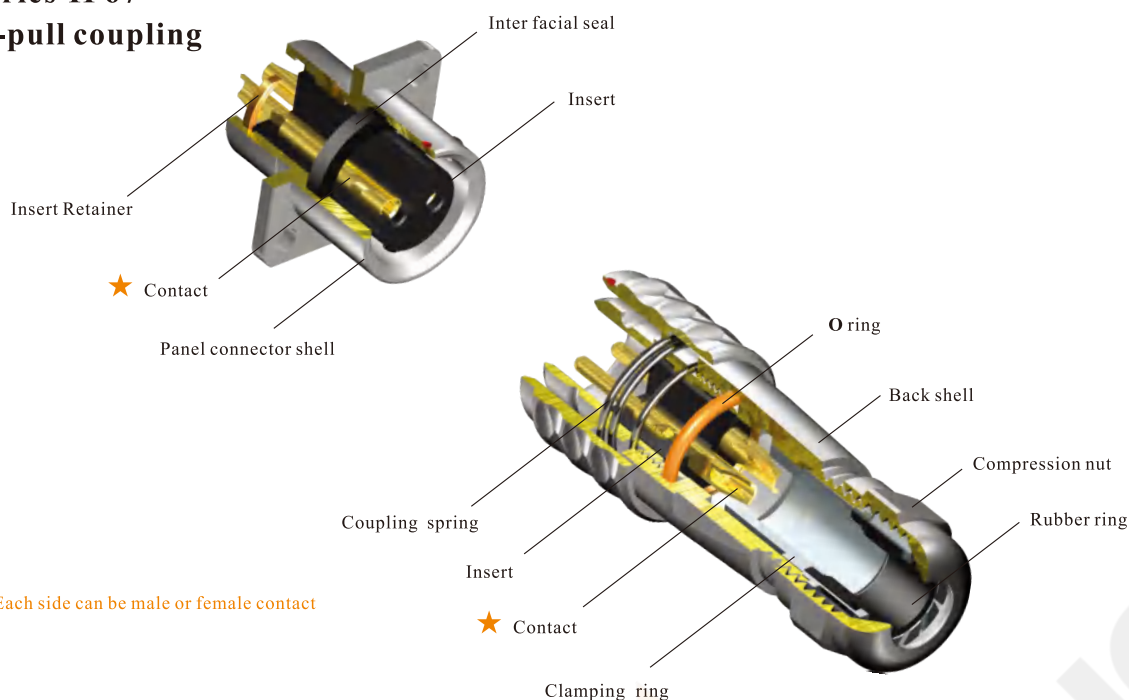

Material and spec

Coupling	Push-pull	
Shell material	Brass with chrome plating	
Insert material	PPS max temperature 260 °C	
Contact material	Brass with gold plating	
Termination	Solder: SF6, SF8, SF10, SF12, SF16, SF20 Crimp: SF16, SF20 Screw: SF20 (Ø2.5mm contact)	
Cable outer diameter range	SF6: I: 2-3mm, II: 3-4mm SF8: I: 3-4mm, II: 4-5mm SF10: I: 3-4mm, II: 4-6.5mm	SF12: I: 4-6.5mm, II: 5-8mm SF16: I: 5-8mm, II: 8-12mm SF20: I: 5-9mm, II: 8-12mm
IP rating	IP67	
Mating cycle	500	
Temperature range	-40°C ~ +85°C	
Insulation resistance	2000MΩ	

SF12 Series



Cable connector
Mate with SF1211, SF1212,
SF1213, SF1215



SF
12

SF1210 / P — **SF1**
 └ Male contact

SF1210 / S-

- Male contact


- Cable outer diameter
I: 4-6.5mm , II : 5-8mm
- Number of contact
- Female contact



Angled cable connector
Mate with SF1211, SF1212, SF1213, SF1215

SF1214 / P__II SF1214 / S__II



SF1214 / S—II

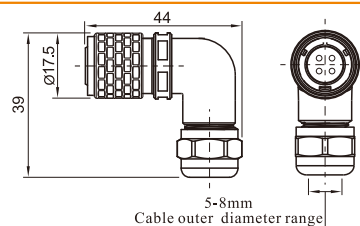

In-line cable connector
Mate with SF1210, SF1214

SF1211 / P__ SF1211 / S__

SF1211 / S_ _

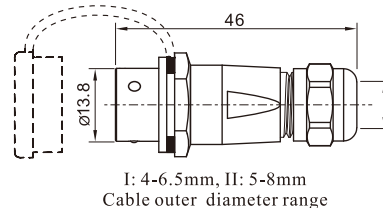



Rear-nut mount
Mate with SF1210,
SF1214

SF1212 / P__ SF1212 / S__

SF1212 / S_



- Number of contact

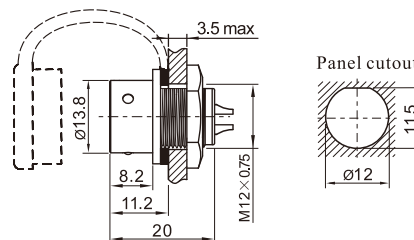

Square flange
Mate with SF1210,
SF1214

SF1213 / P__ SF1213 / S__



SF1213 / S__

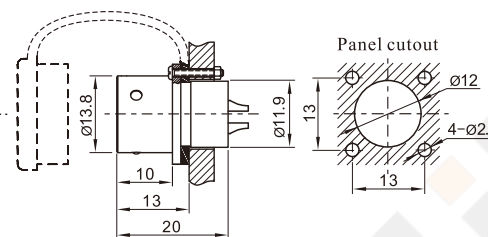

Front-nut mount
Mate with SF1210,
SF1214

SF1215 / P__ SF1215 / S__

SF1215 / S_

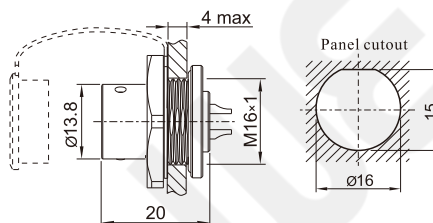

Solder contact spec

Number of contact	2	3	4	5	6	7	9
Male contact face view							
Rated current (A)	13	13	5	5	5	5	3
Contact diameter(mm)	Ø1.6X2	Ø1.6X3	Ø1X4	Ø1X5	Ø1X6	Ø1X7	Ø0.7X9
Rated voltage (AC.V)	250	250	200	180	125	125	125
Test voltage(AC.V) 1 min	1500	1500	1500	1000	1000	1000	1000
Contact resistance (mΩ)	2.5	2.5	5	5	5	5	10
Wire size(mm ² /AWG)	≤2/14	≤2/14	≤0.75/18	≤0.75/18	≤0.75/18	≤0.75/18	≤0.5/20

SF12 Series

**SF
12**

02



Cable connector
Mate with SF1211, SF1212,
SF1213

SF1210 / P



SF1210 / S

Male contact

(U):

Number of contact

Female contact



4-6.5mm
Cable outer diameter range




Angled cable connector
Mate with SF1211, SF1212, SF1213

SF1214 / P II

SF1214 / S II

(U):





5-8mm
Cable outer diameter range



In-line cable connector
Mate with SF1210, SF1214

SF1211 / P

SF1211 / S

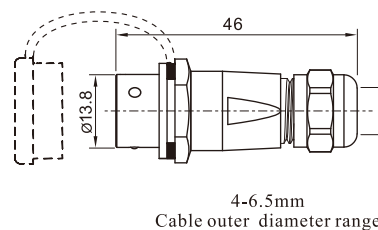

4-6.5mm
Cable outer diameter range






Rear-nut mount
Mate with SF1210,
SF1214

SF1212 / P

SF1212 / S

(U):




Number of contact



Square flange
Mate with SF1210,
SF1214

SF1213 / P

SF1213 / S



Solder contact spec

Number of contact	4	5	6	7
Male contact face view				
Rated current (A)	5	5	5	5
Contact diameter(mm)	Ø1X4	Ø1X5	Ø1X6	Ø1X7
Rated voltage (AC.V)	300	300	300	300
Test voltage(AC.V) 1 min	1500	1000	1000	1000
Contact resistance (mΩ)	5	5	5	5
Wire size (AWG)	18	18	18	18