
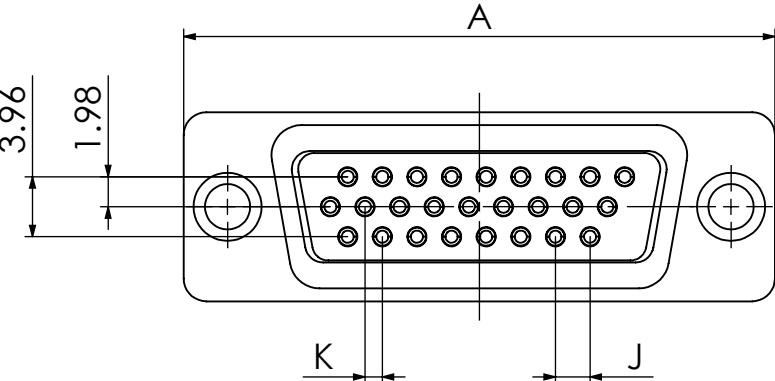
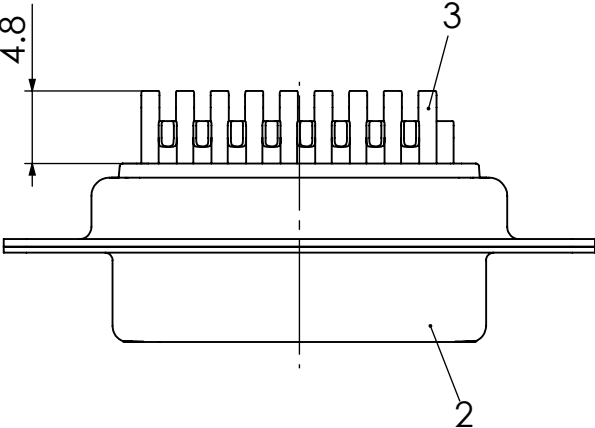



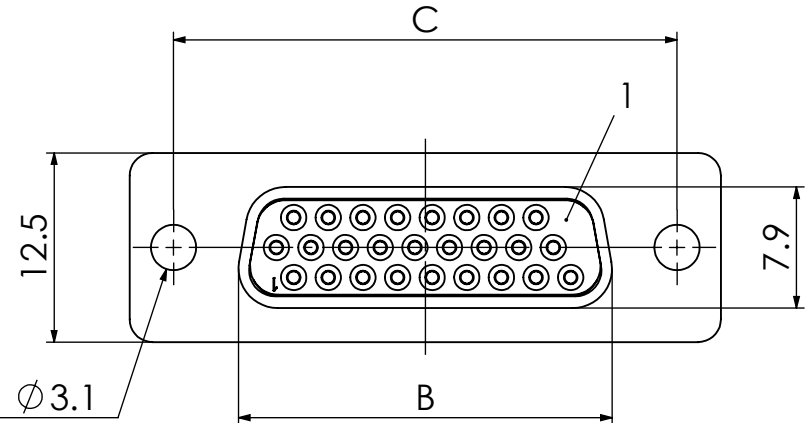

CTx-x*)S
e.g. CT15-26S

*) x-x No. of contacts 09-15, 15-26, 25-44 or 37-62

MATERIAL NUMBER	x-x *)	A [mm]	B [mm]	C [mm]	J [mm]	K [mm]	No. of Contacts 1./2./3. row
1731130059	09-15	30.8	16.30	25.00	2.29	1.14	5/5/5
1731130061	15-26	39.2	24.60	33.30	2.29	1.14	9/9/8
1731130063	25-44	53.1	38.30	47.10	2.29	1.14	15/15/14
1731130065	37-62	69.4	54.80	63.50	2.41	1.20	21/21/20

3	xx	Signal contact	S0 / Copper alloy	flash gold / AWG22
2	1	Shell	Stainless steel	nickel plated
1	1	Insulator	Thermoplastic, acc. UL94V-0	black
<i>No.</i>	<i>St.</i>	<i>Part</i>	<i>Type Description/Material</i>	<i>Surface plating/Colour/Class</i>

FUNCTIONAL SYMBOLS	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION														
	DIMENSION UNITS		SCALE		UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN MM				molex FCT High Density D-Sub Connector						
	mm		2:1		TOLERANCES: ANG. ±5° .0 ±0.3 0. ±0.5 .00 ±0.2										
					CURRENT REVISION										
					DRWN: DRAWN BY mteubel 24-09-2024										
					APPR: APPR BY msteinbrueck 10-02-2025										
	9		24520												
	8		24178												
	7		24130		INITIAL REVISION										
REV.		CH.-NO.		DRWN: DRAWN BY ADenzinger 12-01-2006											
				APPR: APPR BY sschref 13-01-2006											
REPLACEMENT FOR:				FIRST ANGLE PROJECTION		DRAWING		DOCUMENT NUMBER				CUSTOMER		SHEET NUMBER	
CTxxS						A3-SIZE		CTx-xS				GENERAL MARKET		1 OF 1	