


IP67

- SF Series IP67
- Push-pull coupling

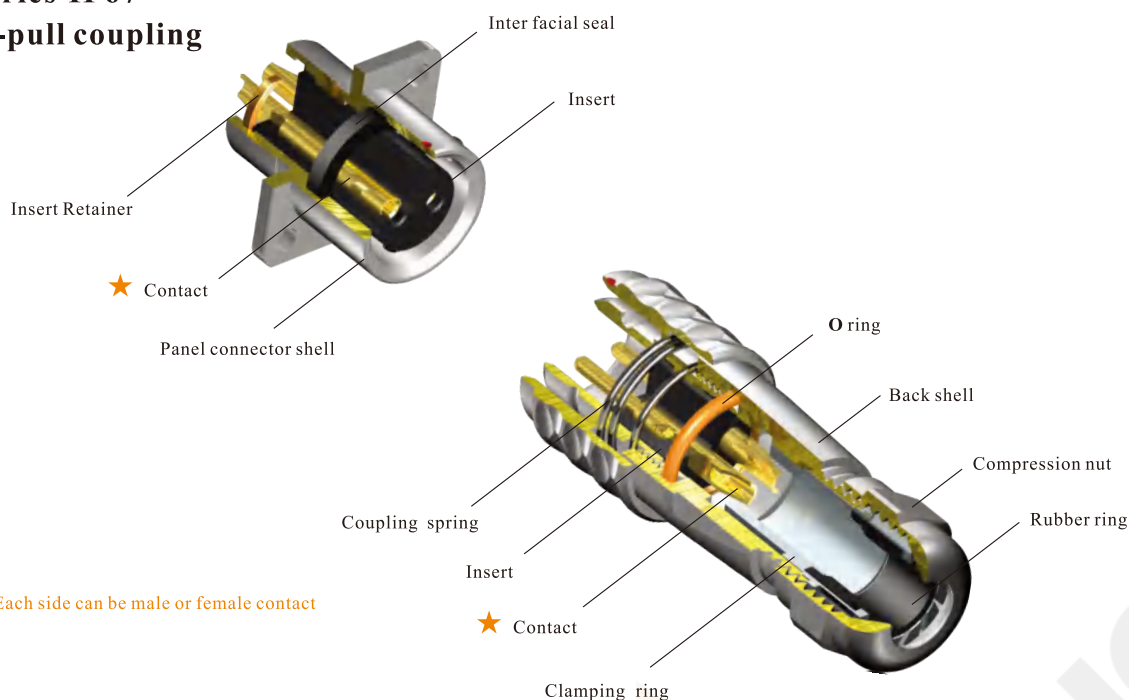

Material and spec

Coupling	Push-pull	
Shell material	Brass with chrome plating	
Insert material	PPS max temperature 260 °C	
Contact material	Brass with gold plating	
Termination	Solder: SF6, SF8, SF10, SF12, SF16, SF20 Crimp: SF16, SF20 Screw: SF20 (Ø2.5mm contact)	
Cable outer diameter range	SF6: I: 2-3mm, II: 3-4mm SF8: I: 3-4mm, II: 4-5mm SF10: I: 3-4mm, II: 4-6.5mm	SF12: I: 4-6.5mm, II: 5-8mm SF16: I: 5-8mm, II: 8-12mm SF20: I: 5-9mm, II: 8-12mm
IP rating	IP67	
Mating cycle	500	
Temperature range	-40°C ~ +85°C	
Insulation resistance	2000MΩ	

SF12 Series



**SF
12**



Cable connector
Mate with SF1211, SF1212,
SF1213, SF1215


SF1210 / P — Male contact
SF1210 / S — Female contact

Cable outer diameter
I: 4-6.5mm, II: 5-8mm
Number of contact
Female contact





SF1214 / P — II Male contact
SF1214 / S — II Female contact

Angled cable connector
Mate with SF1211, SF1212, SF1213, SF1215

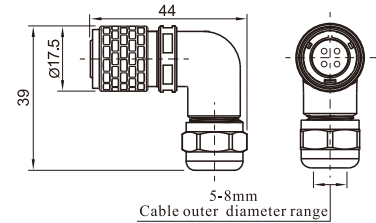



SF1211 / P — Male contact
SF1211 / S — Female contact

In-line cable connector
Mate with SF1210, SF1214

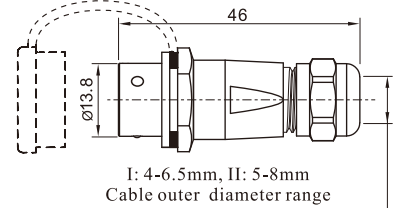



SF1212 / P — Male contact
SF1212 / S — Female contact

Rear-nut mount
Mate with SF1210,
SF1214

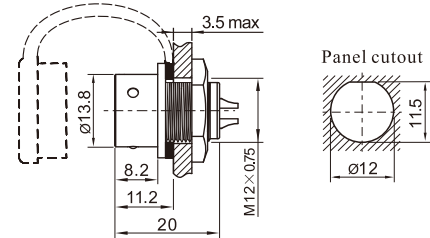



SF1213 / P — Male contact
SF1213 / S — Female contact

Square flange
Mate with SF1210,
SF1214

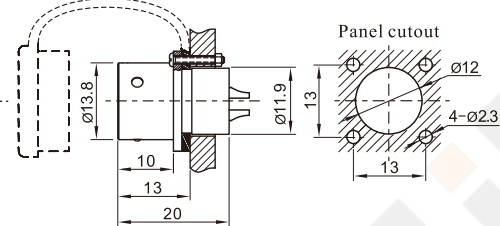

SF1215 / P — Male contact
SF1215 / S — Female contact

Front-nut mount
Mate with SF1210,
SF1214

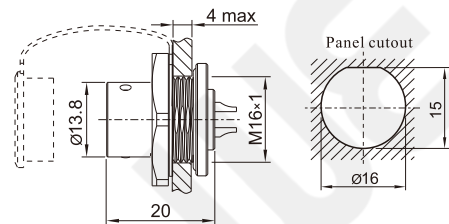

Solder contact spec

Number of contact	2	3	4	5	6	7	9
Male contact face view							
Rated current (A)	13	13	5	5	5	5	3
Contact diameter(mm)	Ø1.6X2	Ø1.6X3	Ø1X4	Ø1X5	Ø1X6	Ø1X7	Ø0.7X9
Rated voltage (AC.V)	250	250	200	180	125	125	125
Test voltage(AC.V) 1 min	1500	1500	1500	1000	1000	1000	1000
Contact resistance (mΩ)	2.5	2.5	5	5	5	5	10
Wire size (mm ² /AWG)	≤2/14	≤2/14	≤0.75/18	≤0.75/18	≤0.75/18	≤0.75/18	≤0.5/20

SF12 Series

**SF
12**

02



Cable connector
Mate with SF1211, SF1212,
SF1213



SF1210 / P — SF1210 / S —

Male contact

(U):

Number of contact


Female contact



Angled cable connector
Mate with SF1211, SF1212, SF1213



SF1214 / P — II — SF1214 / S — II —

(U):

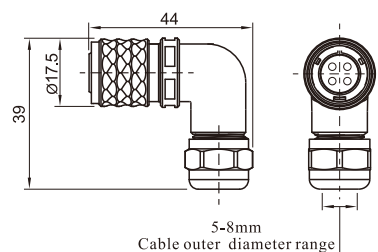

In-line cable connector
Mate with SF1210, SF1214

SF1211 / P — SF1211 / S —

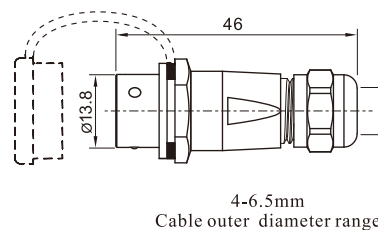



Rear-nut mount
Mate with SF1210,
SF1214

SF1212 / P — SF1212 / S —



(U):

Number of contact

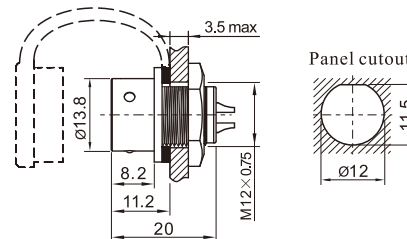

Square flange
Mate with SF1210,
SF1214

SF1213 / P — SF1213 / S —

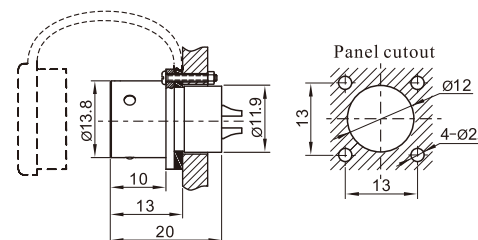

Solder contact spec

Number of contact	4	5	6	7
Male contact face view				
Rated current (A)	5	5	5	5
Contact diameter(mm)	Ø1X4	Ø1X5	Ø1X6	Ø1X7
Rated voltage (AC.V)	300	300	300	300
Test voltage(AC.V) 1 min	1500	1000	1000	1000
Contact resistance (mΩ)	5	5	5	5
Wire size (AWG)	18	18	18	18