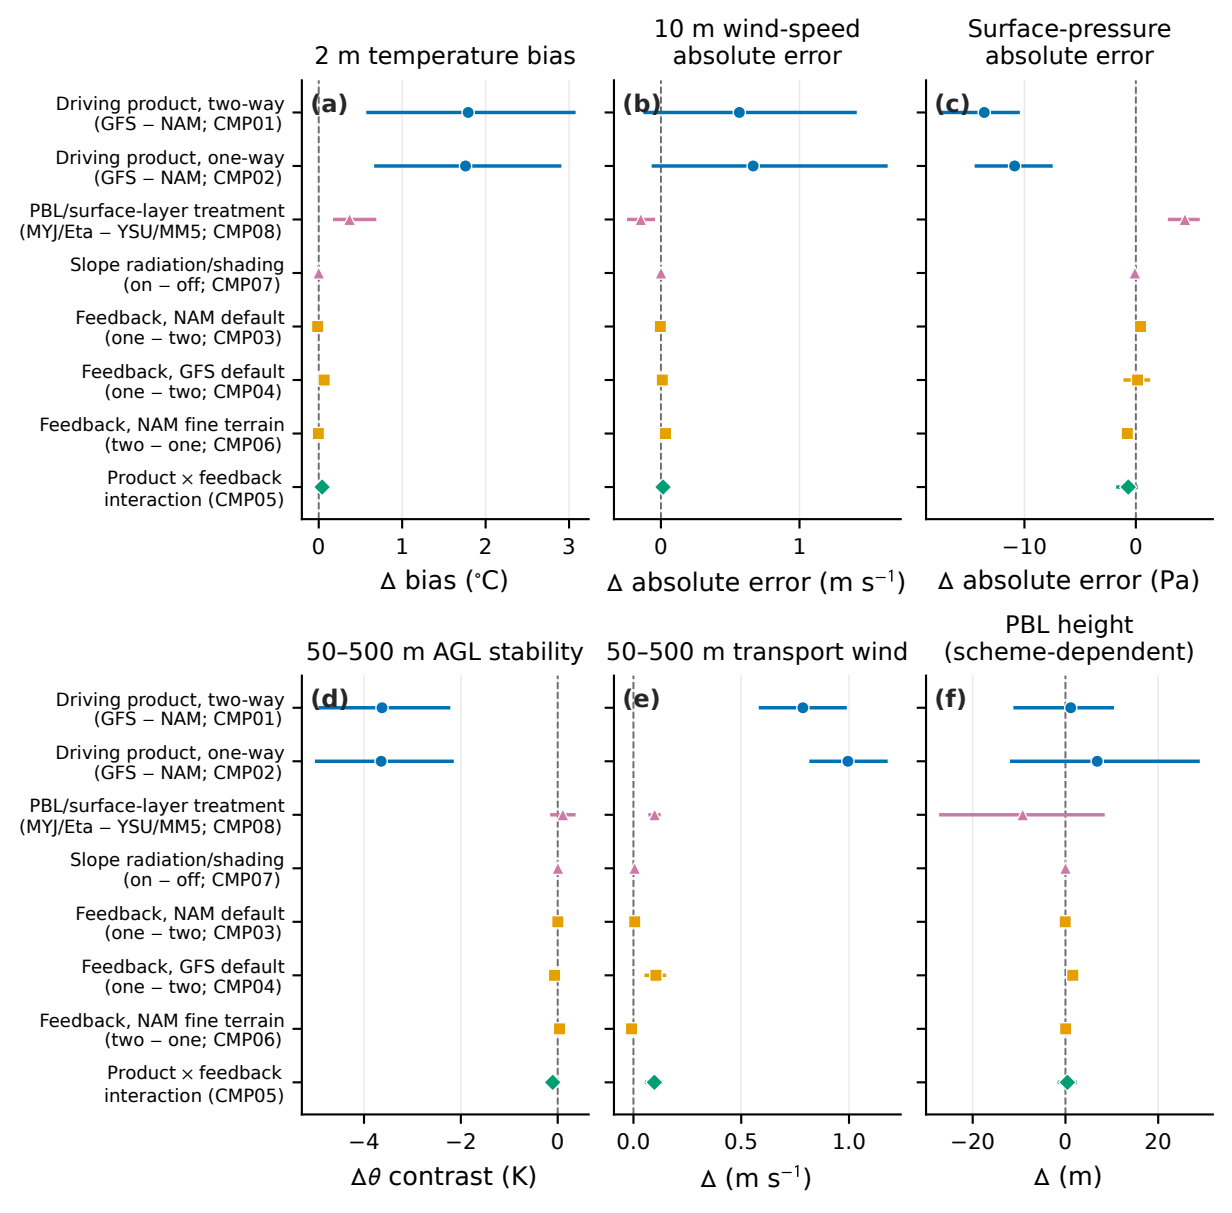
2 m temperature bias
10 m wind-speed absolute error
Surface-pressure absolute error
(a)
(b)
(c)
Driving product, two-way (GFS – NAM; CMP01)
Driving product, one-way (GFS – NAM; CMP02)
PBL/surface-layer treatment (MYJ/Eta – YSU/MM5; CMP08)
Slope radiation/shading (on – off; CMP07)
Feedback, NAM default (one – two; CMP03)
Feedback, GFS default (one – two; CMP04)
Feedback, NAM fine terrain (two – one; CMP06)
Product × feedback interaction (CMP05)
0
1
2
3
Δ bias (°C)
0
1
Δ absolute error (m s⁻¹)
−10
0
Δ absolute error (Pa)
50–500 m AGL stability
50–500 m transport wind
PBL height (scheme-dependent)
(d)
(e)
(f)
−4
−2
0
Δθ contrast (K)
0.0
0.5
1.0
Δ (m s⁻¹)
−20
0
20
Δ (m)