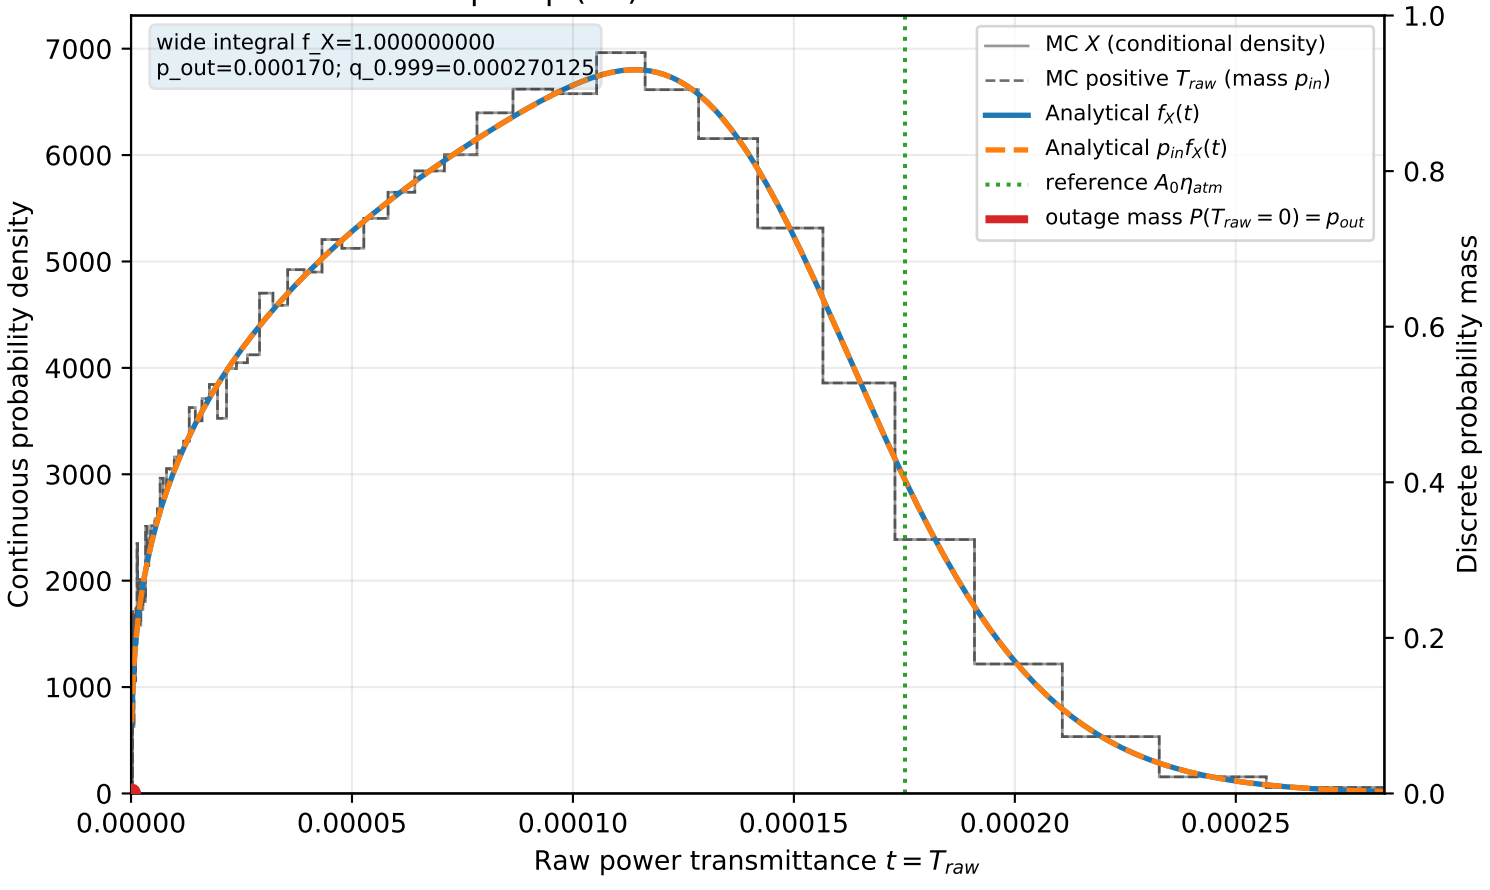
Manuscript Eq. (62): raw HAP--UAV transmittance PDF
wide integral f_X=1.000000000
p_out=0.000170; q_0.999=0.000270125
MC X (conditional density)
MC positive T_raw (mass p_in)
Analytical f_X(t)
Analytical p_in f_X(t)
reference A_0 η_atm
outage mass P(T_raw = 0) = p_out
Continuous probability density
Discrete probability mass
Raw power transmittance t = T_raw
0
1000
2000
3000
4000
5000
6000
7000
0.0
0.2
0.4
0.6
0.8
1.0
0.00000
0.00005
0.00010
0.00015
0.00020
0.00025