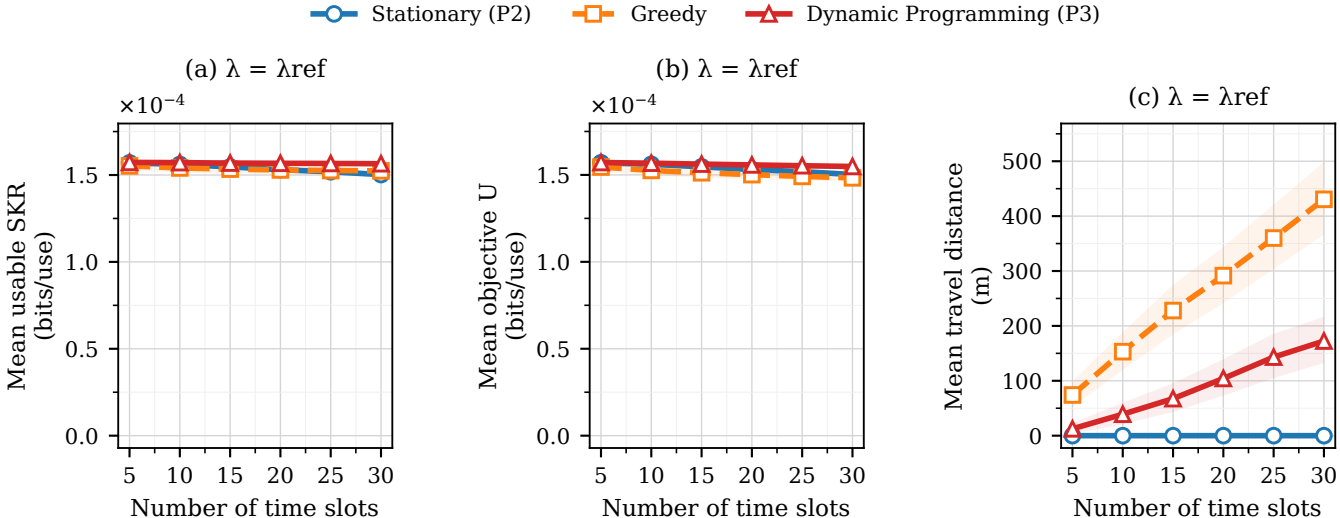
Stationary (P2)
Greedy
Dynamic Programming (P3)
(a) λ = λref
(b) λ = λref
(c) λ = λref
×10⁻⁴
×10⁻⁴
Mean usable SKR (bits/use)
Mean objective U (bits/use)
Mean travel distance (m)
0.0
0.5
1.0
1.5
0
100
200
300
400
500
5
10
15
20
25
30
Number of time slots
Number of time slots
Number of time slots
100 paired missions; pointwise bootstrap 95% CI; λref = 9.46803 × 10⁻⁶ bits/use