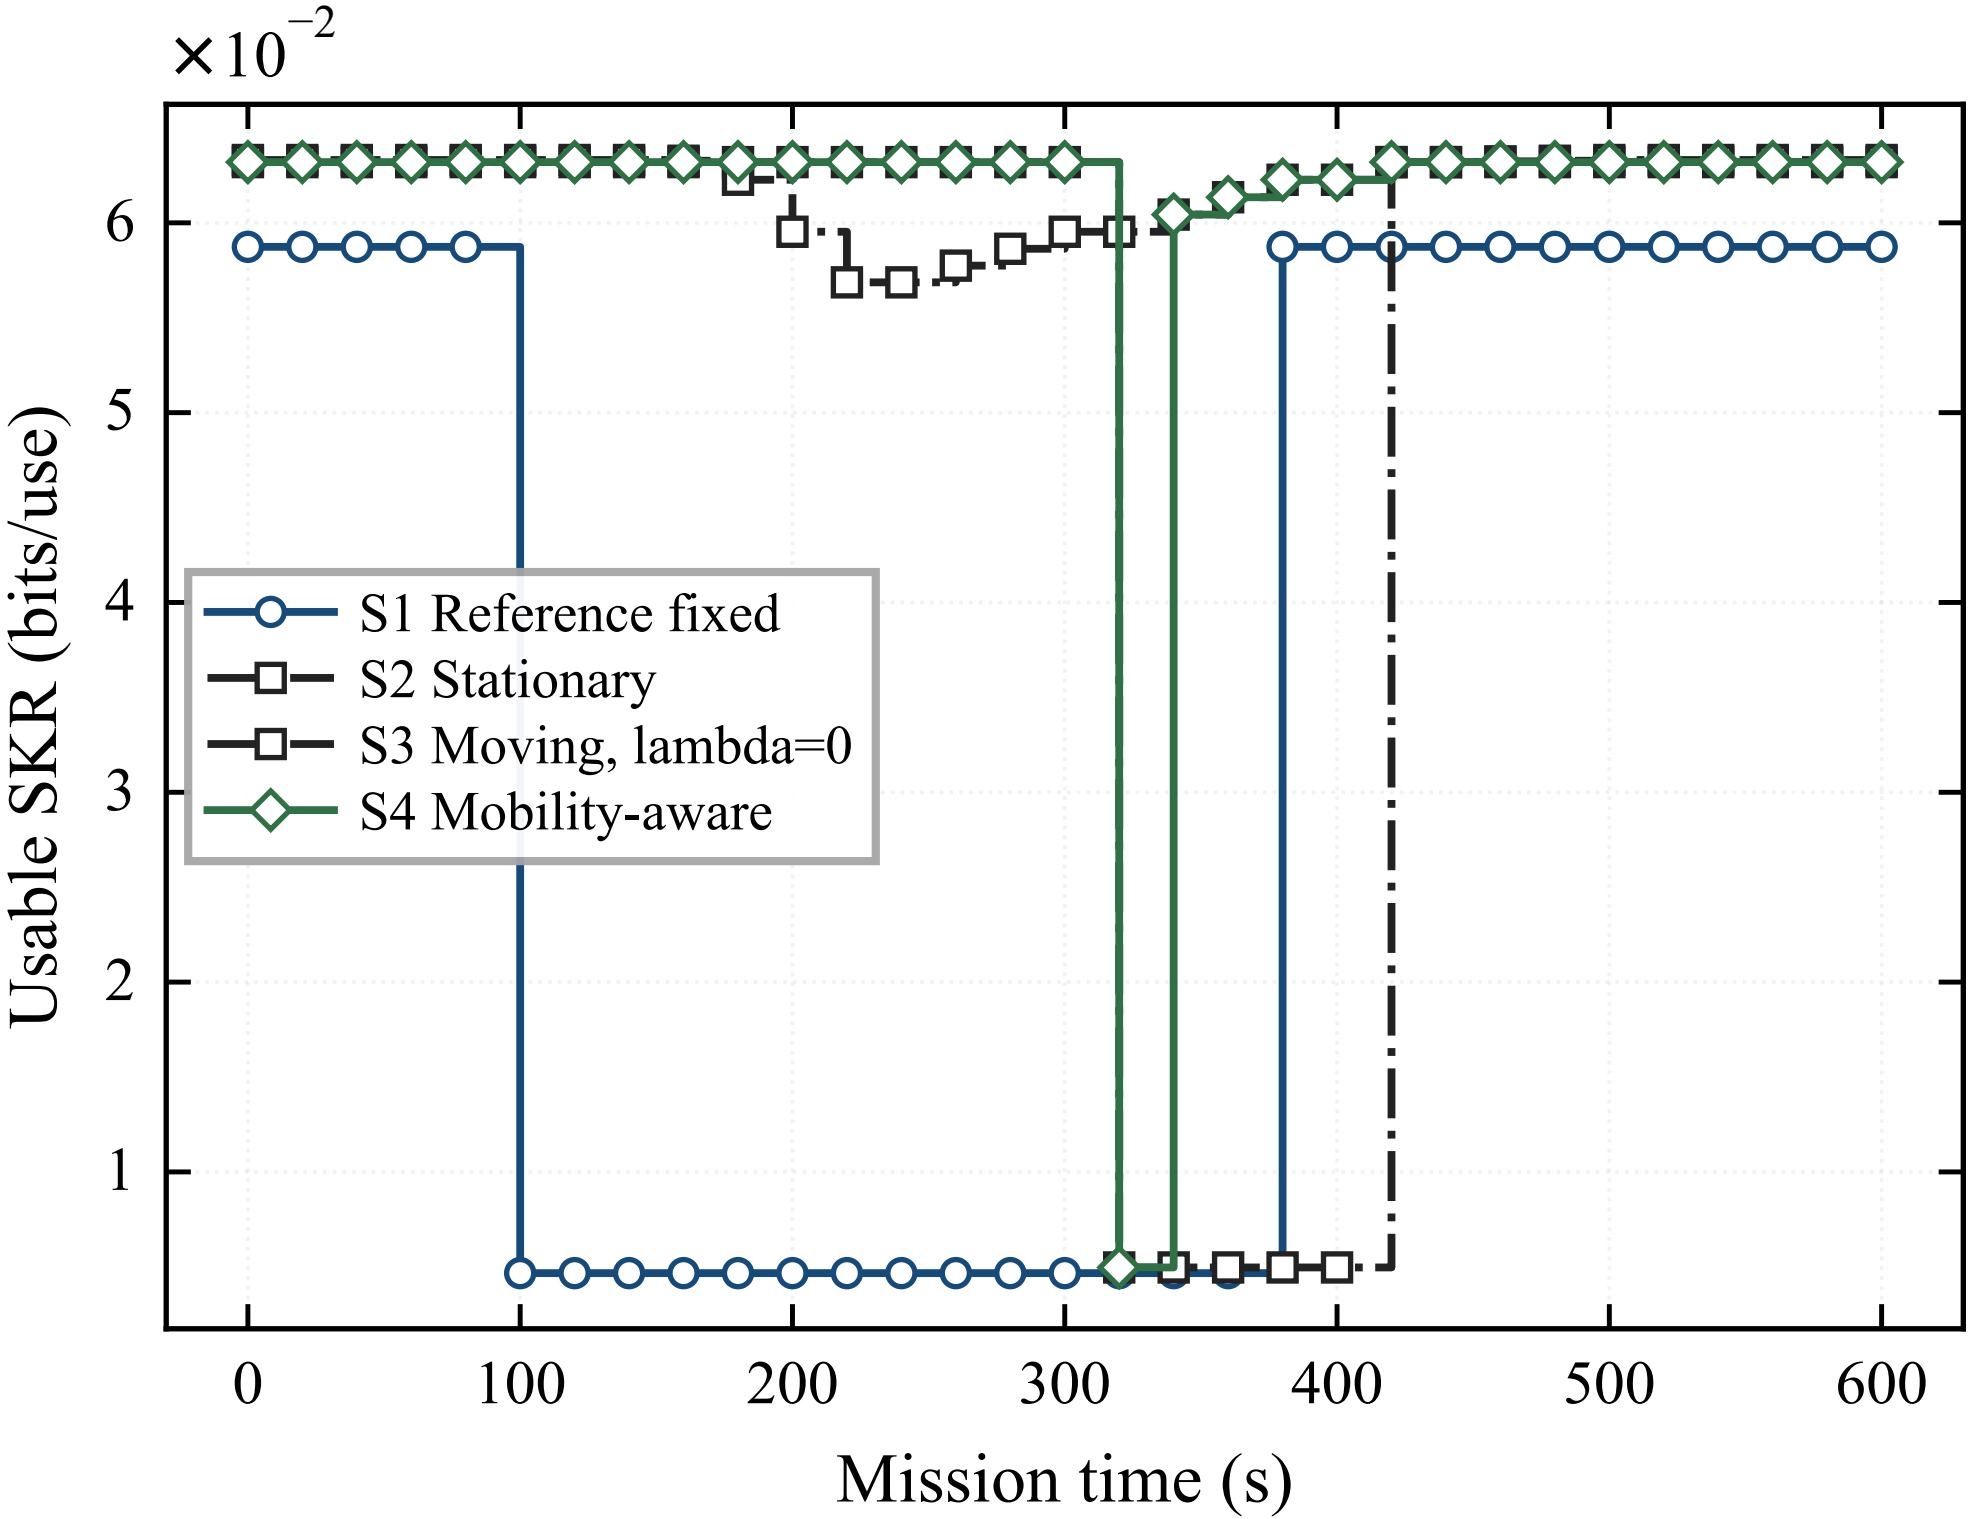
×10^−2
6
5
4
3
2
1
Usable SKR (bits/use)
S1 Reference fixed
S2 Stationary
S3 Moving, lambda=0
S4 Mobility-aware
0
100
200
300
400
500
600
Mission time (s)