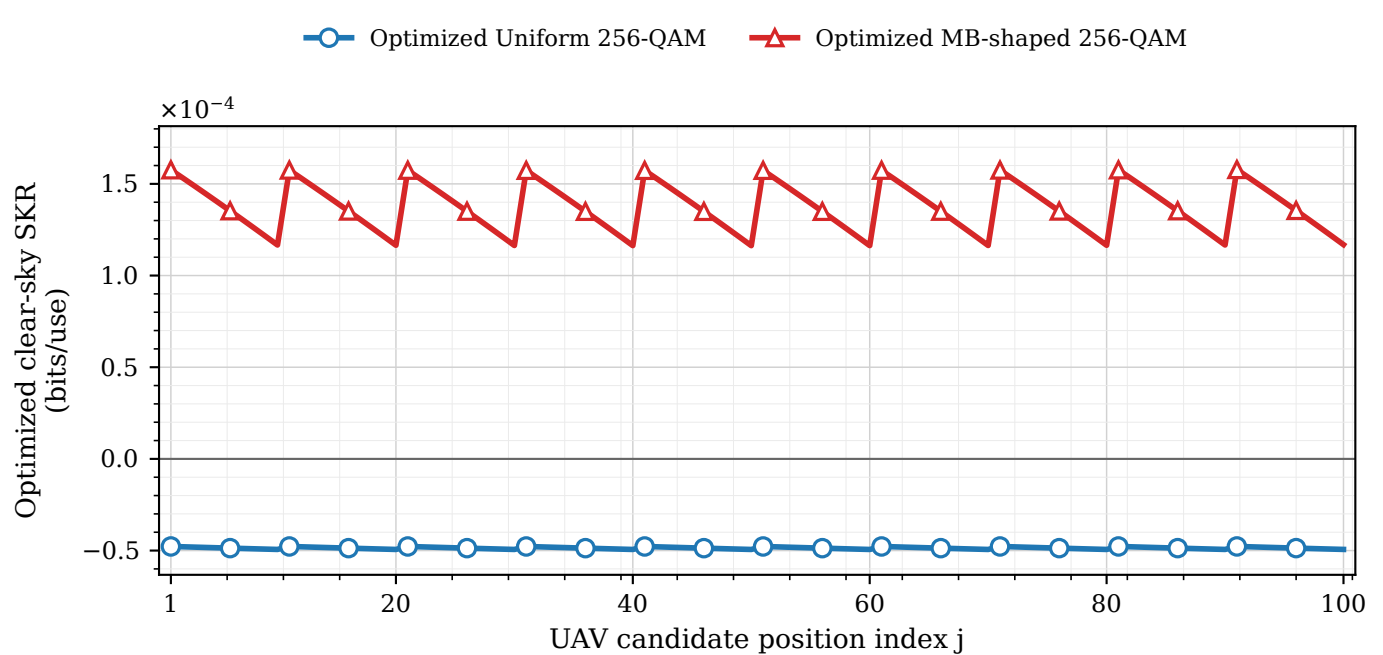
Optimized Uniform 256-QAM
Optimized MB-shaped 256-QAM
×10−4
1.5
1.0
0.5
0.0
−0.5
Optimized clear-sky SKR
(bits/use)
1
20
40
60
80
100
UAV candidate position index j