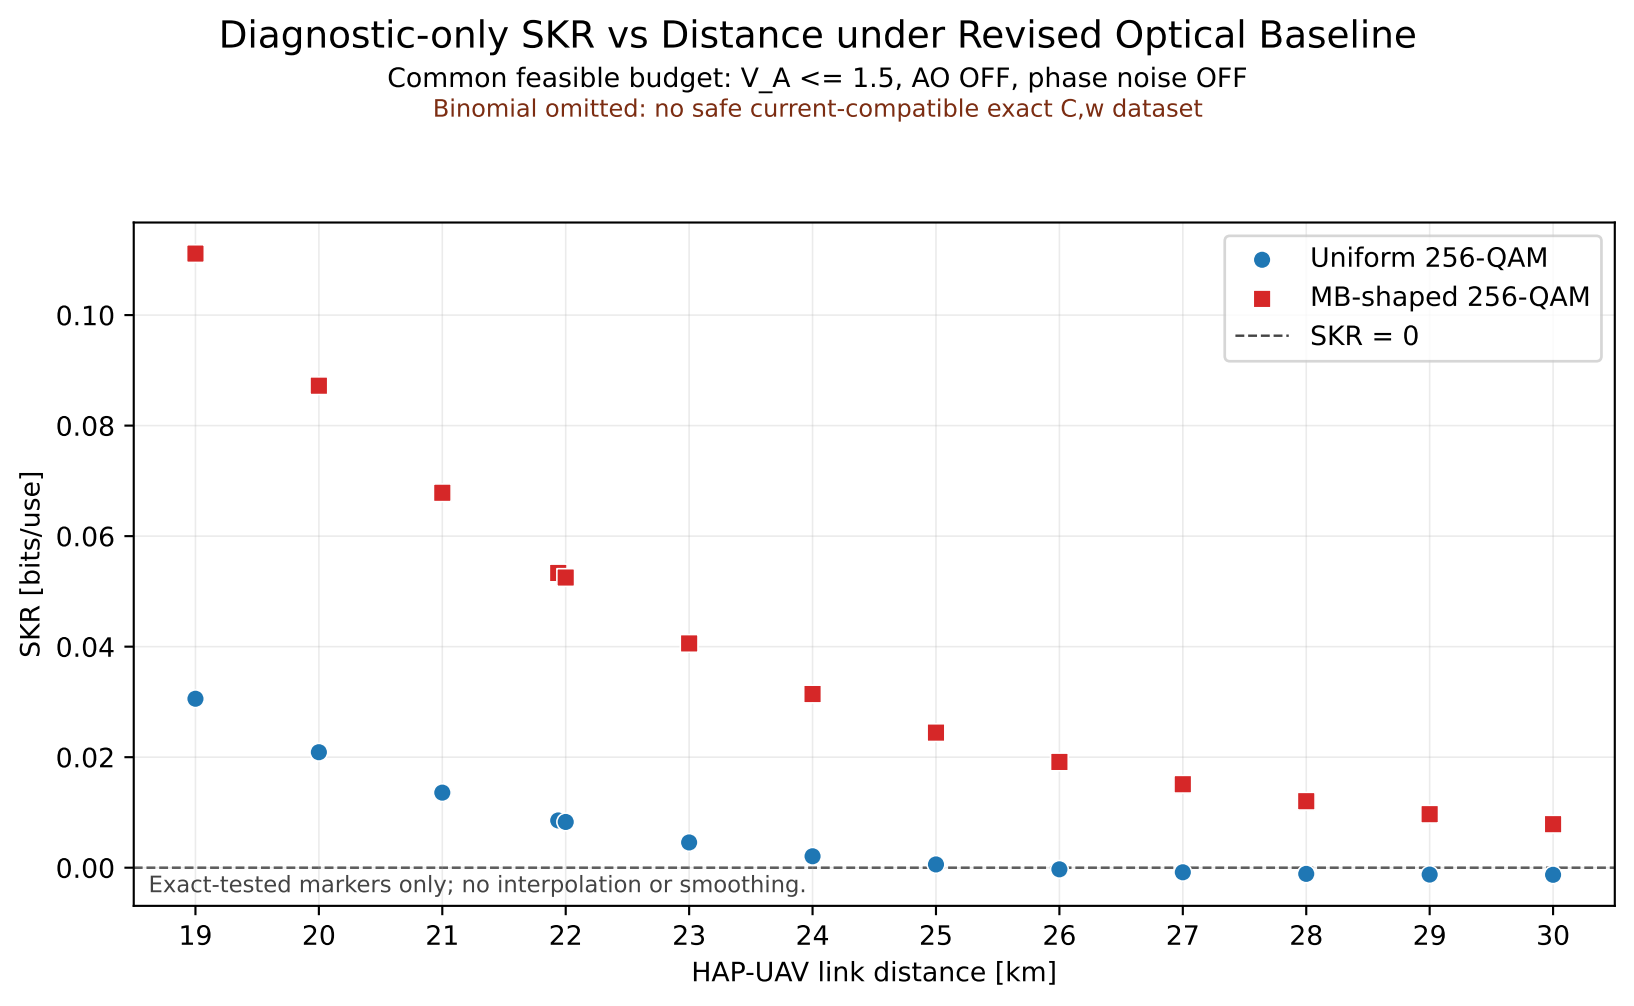
Diagnostic-only SKR vs Distance under Revised Optical Baseline
Common feasible budget: V_A <= 1.5, AO OFF, phase noise OFF
Binomial omitted: no safe current-compatible exact C,w dataset
Uniform 256-QAM
MB-shaped 256-QAM
SKR = 0
SKR [bits/use]
0.10
0.08
0.06
0.04
0.02
0.00
Exact-tested markers only; no interpolation or smoothing.
19
20
21
22
23
24
25
26
27
28
29
30
HAP-UAV link distance [km]