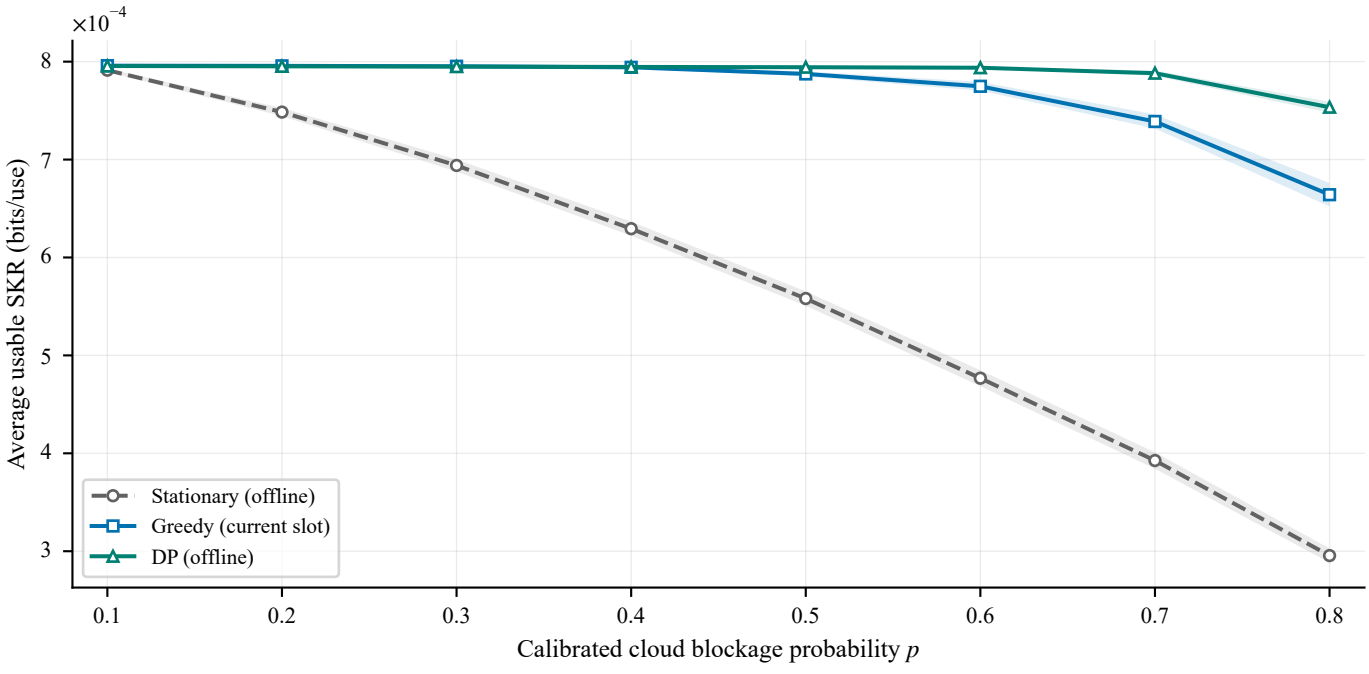
×10^−4
8
7
6
5
4
3
Average usable SKR (bits/use)
Stationary (offline)
Greedy (current slot)
DP (offline)
0.1
0.2
0.3
0.4
0.5
0.6
0.7
0.8
Calibrated cloud blockage probability p