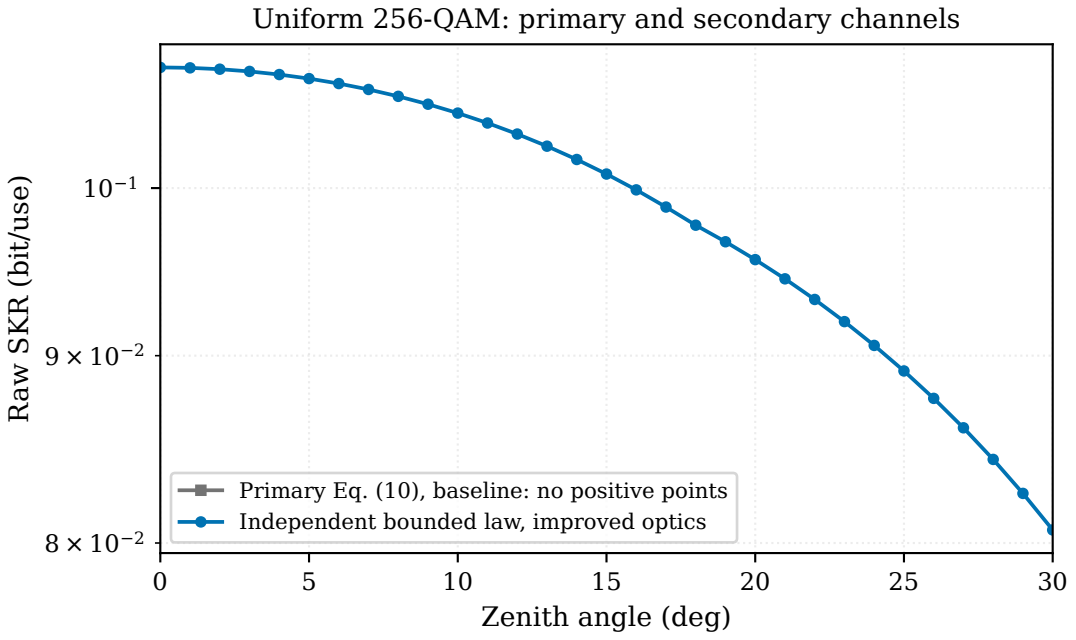
Uniform 256-QAM: primary and secondary channels
Raw SKR (bit/use)
10^{-1}
9×10^{-2}
8×10^{-2}
0
5
10
15
20
25
30
Zenith angle (deg)
Primary Eq. (10), baseline: no positive points
Independent bounded law, improved optics
Primary: 35 / 1.561 urad / 0.10 m; secondary: 10 / 0.5 urad / 0.03 m
Divergence / jitter / position SD; receiver 30 cm. Security provisional.