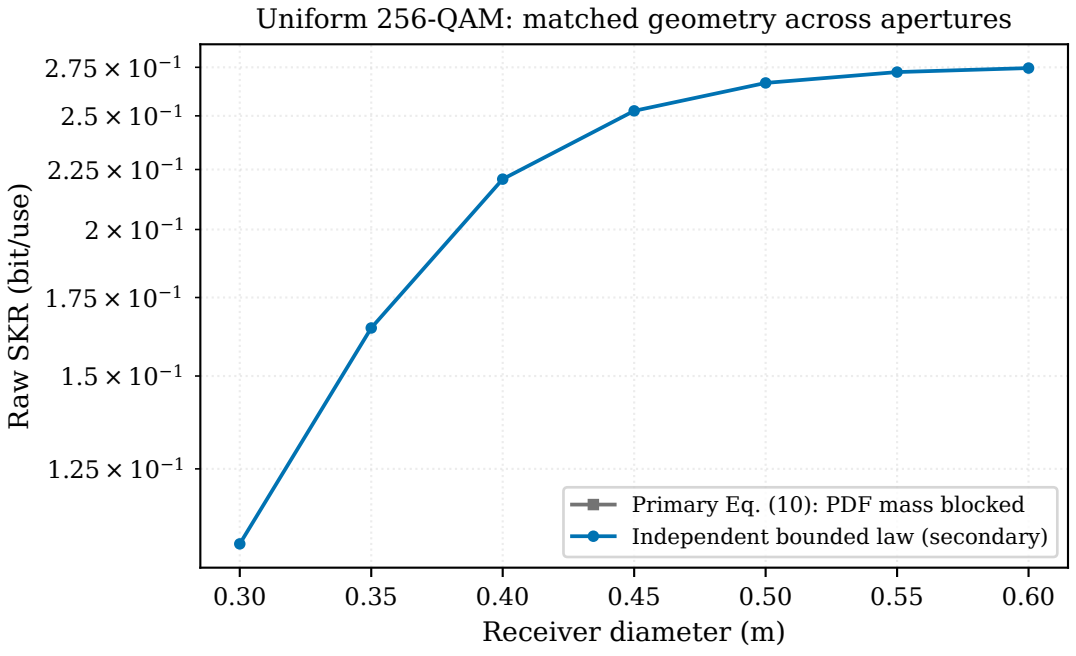
Uniform 256-QAM: matched geometry across apertures
Raw SKR (bit/use)
2.75 × 10⁻¹
2.5 × 10⁻¹
2.25 × 10⁻¹
2 × 10⁻¹
1.75 × 10⁻¹
1.5 × 10⁻¹
1.25 × 10⁻¹
0.30
0.35
0.40
0.45
0.50
0.55
0.60
Receiver diameter (m)
Primary Eq. (10): PDF mass blocked
Independent bounded law (secondary)
Zenith 0 deg; divergence 10 urad; jitter 0.5 urad; position SD 0.03 m.
No rate assigned to failed PDFs. Security provisional.