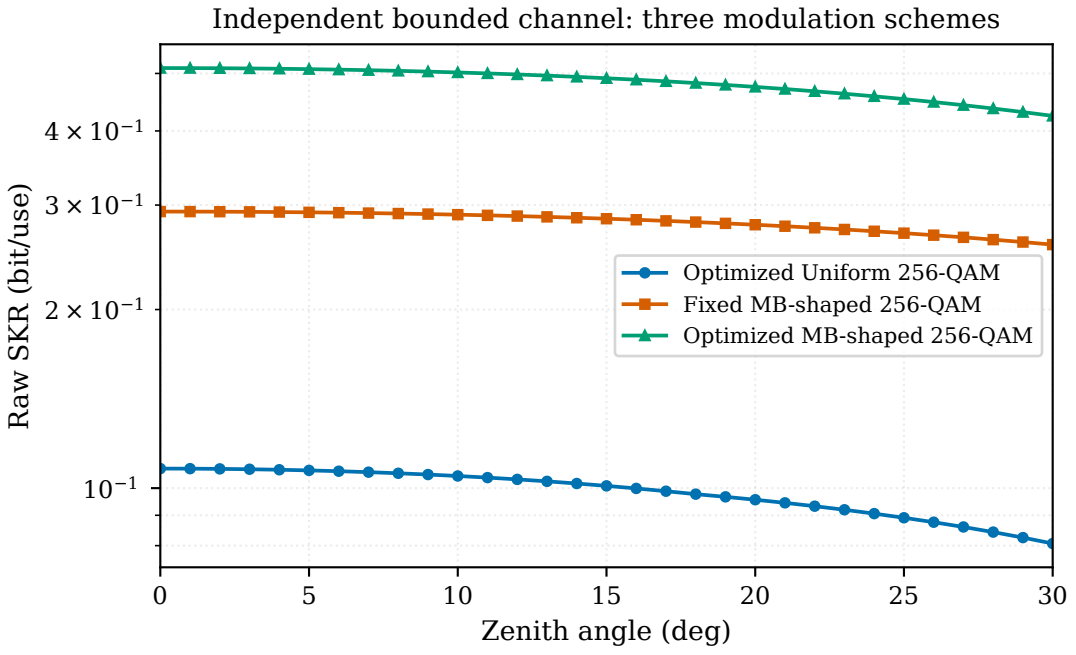

Same 30 cm receiver / 10 urad divergence / 0.5 urad jitter / 0.03 m position SD.
Exact catalog selection; same v43 noise, homodyne. Security provisional.