



Input			
5	4		
0X00	}		
000X			
X0X0			
X00X			
XX00			
Output			
1	0	0	0
1	1	0	0
0	1	0	0
0	1	1	0
0	0	1	1


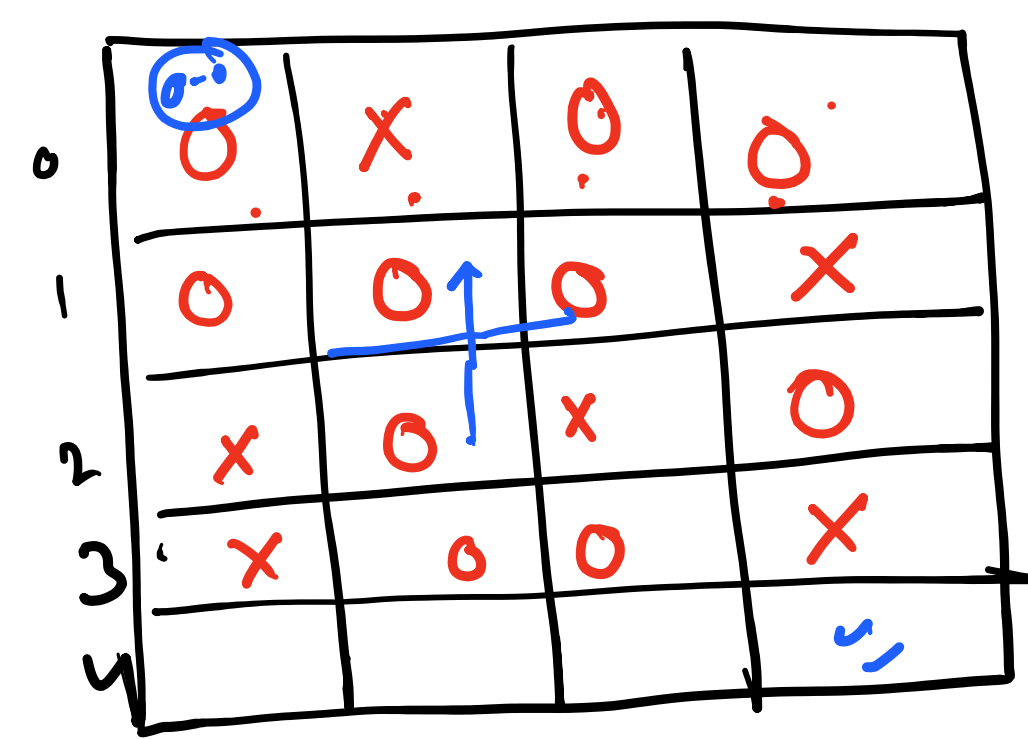


for (ci = 0; ci < maze[0].length; ci++) {
 String s = gc.next();
 for (cj = 0; cj < s.length(); cj++) {
 maze[ci][cj] = s.charAt(cj);
 }
}

```
public static void Path(char[][] maze, int cr, int cc) {  
    if (cr < 0 || cc < 0 || cr >= maze.length || cc >= maze[0].length || maze[cr][cc] == 'X') {  
        return;  
    }  
    maze[cr][cc] = 'X';  
    Path(maze, cr - 1, cc); // up  
    Path(maze, cr, cc - 1); // left  
    Path(maze, cr + 1, cc); // down  
    Path(maze, cr, cc + 1); // right  
    maze[cr][cc] = '0';  
}
```




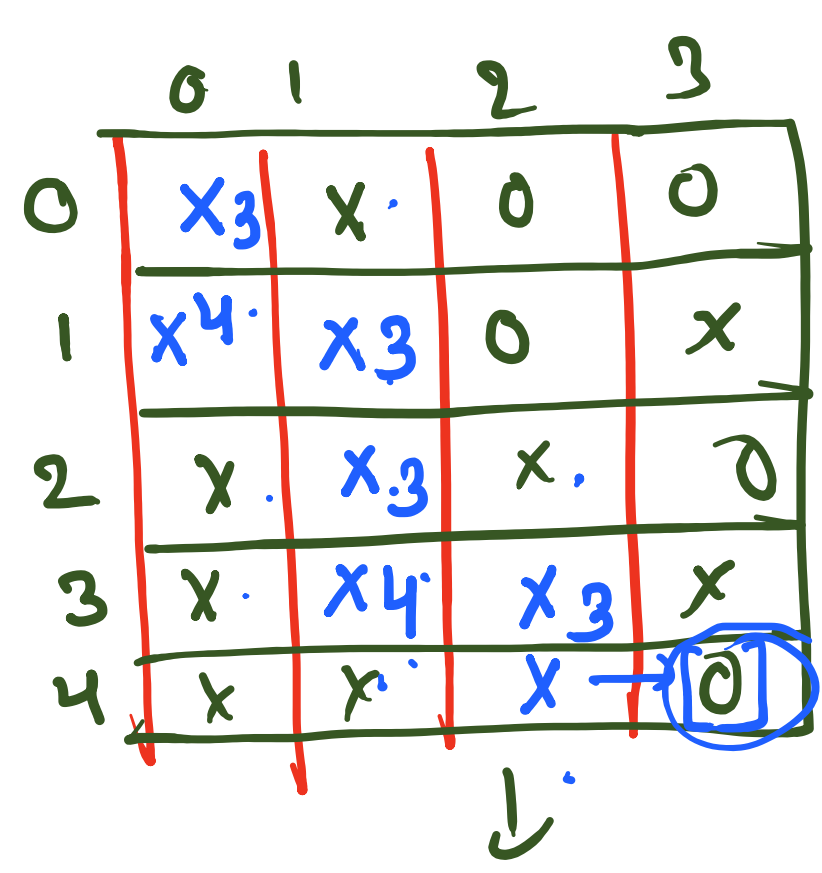


```
public static void Path(char[][] maze, int cr, int cc, int[][] ans) {  
    if (cr < 0 || cc < 0 || cr >= maze.length || cc >= maze[0].length || maze[cr][cc] == 'X') {  
        return;  
    }  
    ans[cr][cc] = 1;  
    if (cr == maze.length - 1 && cc == maze[0].length - 1) {  
        Display(ans);  
        return;  
    }  
    maze[cr][cc] = 'X';  
    Path(maze, cr - 1, cc, ans); // up  
    Path(maze, cr, cc - 1, ans); // left  
    Path(maze, cr + 1, cc, ans); // down  
    Path(maze, cr, cc + 1, ans); // right  
    maze[cr][cc] = '0';  
    ans[cr][cc] = 0;  
}
```

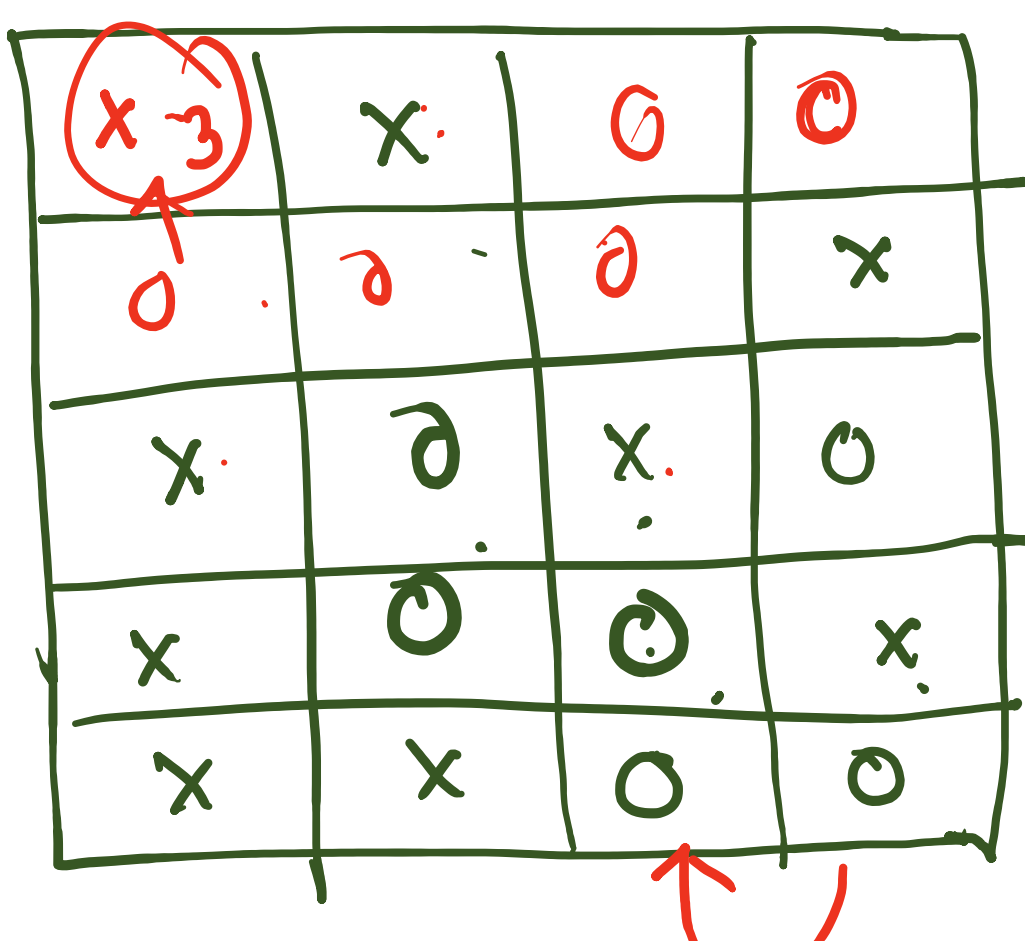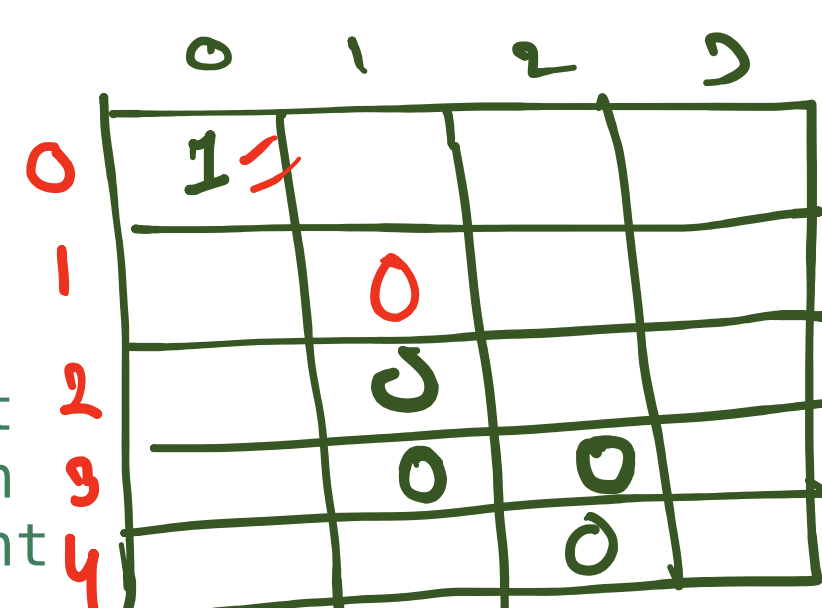


```
public static void Display(int[][] ans) {  
    // TODO Auto-generated method stub  
    for (int i = 0; i < ans.length; i++) {  
        for (int j = 0; j < ans[0].length; j++) {  
            System.out.print(ans[i][j] + " ");  
        }  
        System.out.println();  
    }  
}
```

N=4

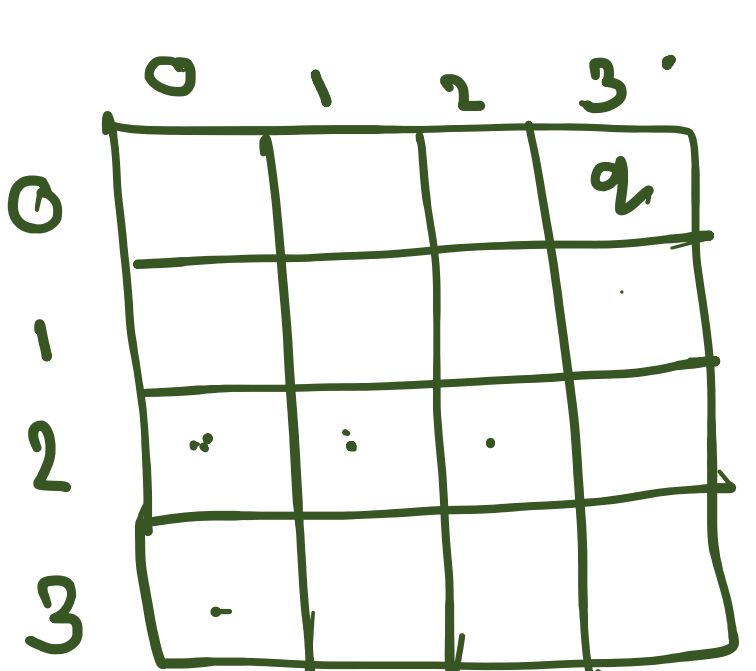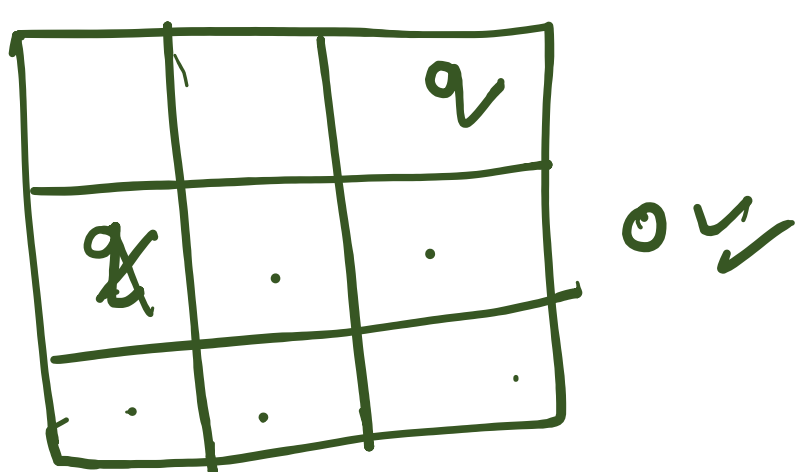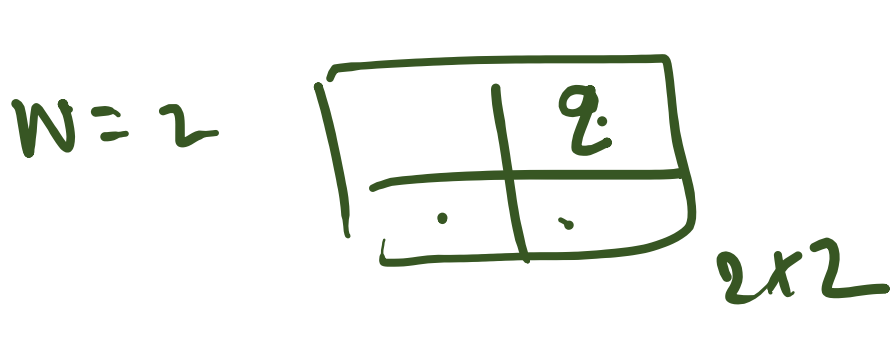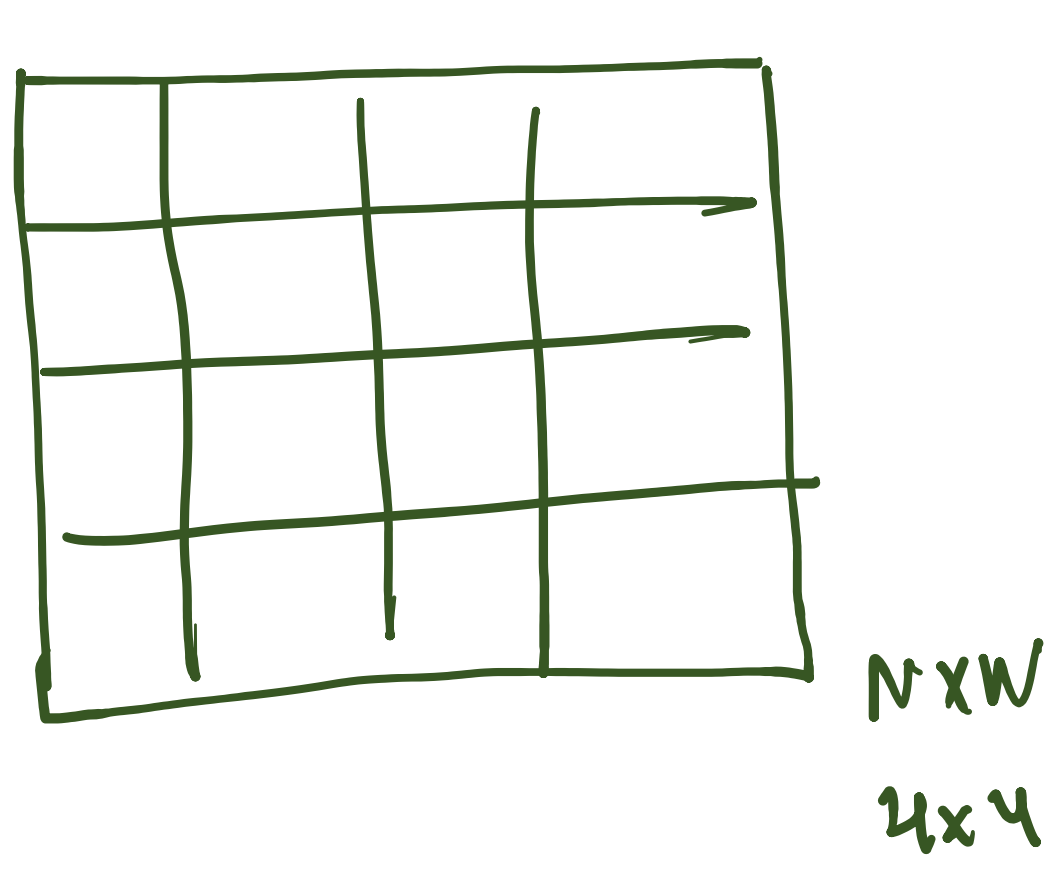


PTFP PFTF
FFFT TFFF
TFFT FFFT
FFTF FTFF

```
public static void print(boolean[][] board, int tq, int row) {  
    if (tq == 0) {  
        Display(board);  
        System.out.println();  
        return;  
    }  
    for (int col = 0; col < board[0].length; col++) {  
        if (isSafe(board, row, col)) {  
            board[row][col] = true;  
            print(board, tq - 1, row + 1);  
            board[row][col] = false;  
        }  
    }  
}
```

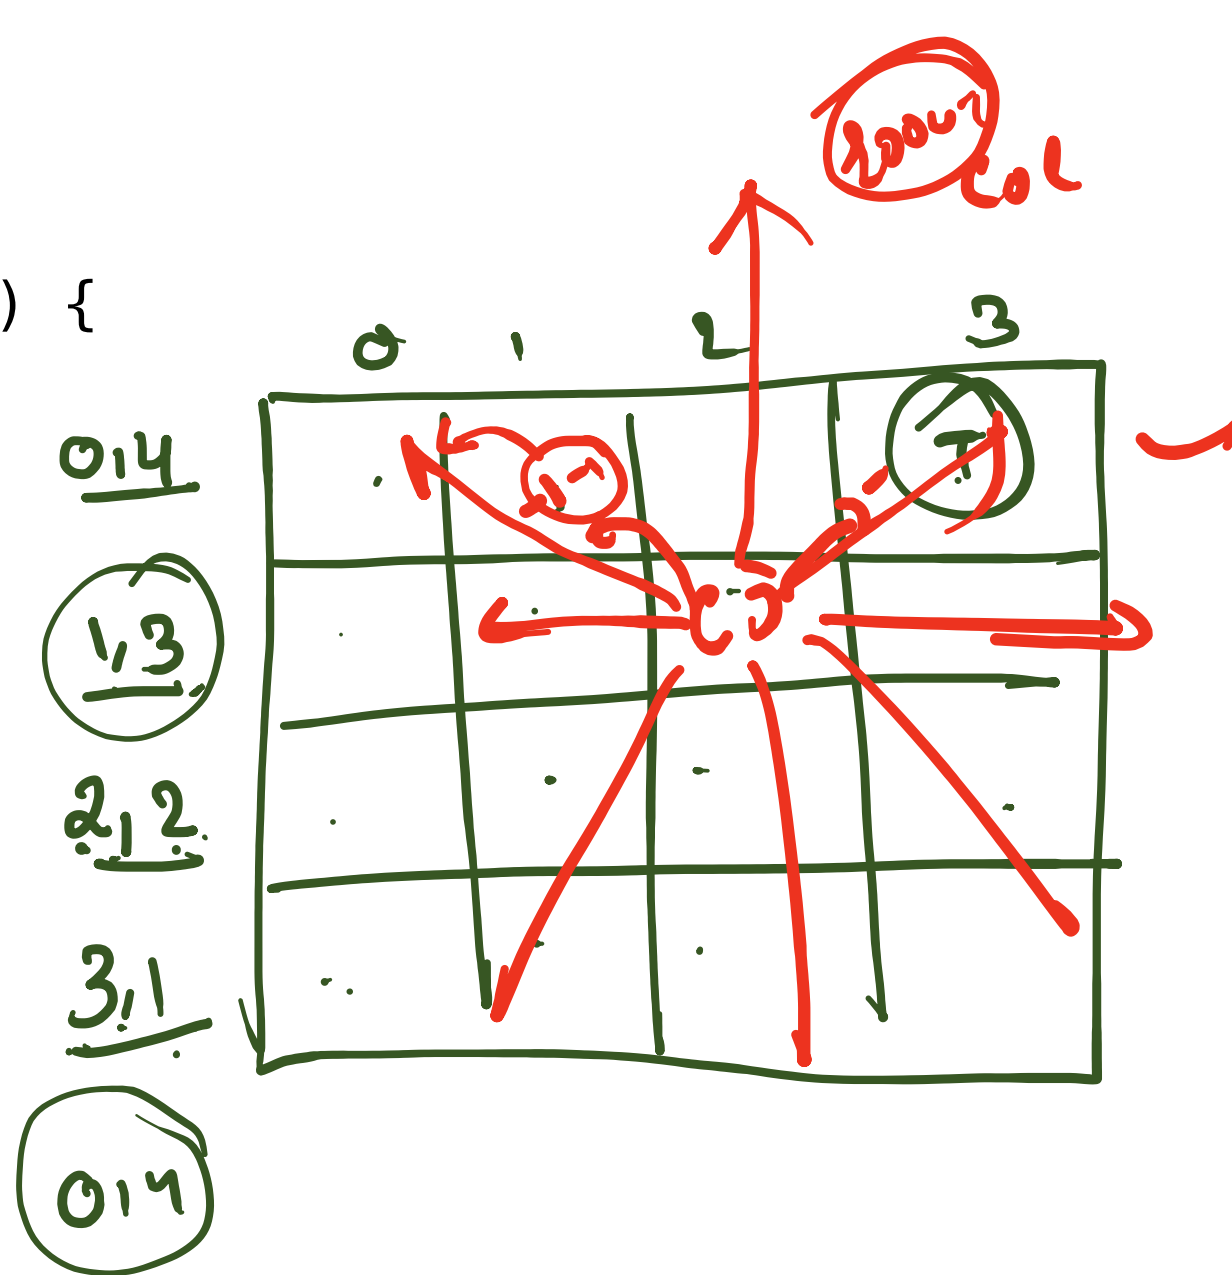

PTFP
FFFT
TFFT
FFTF

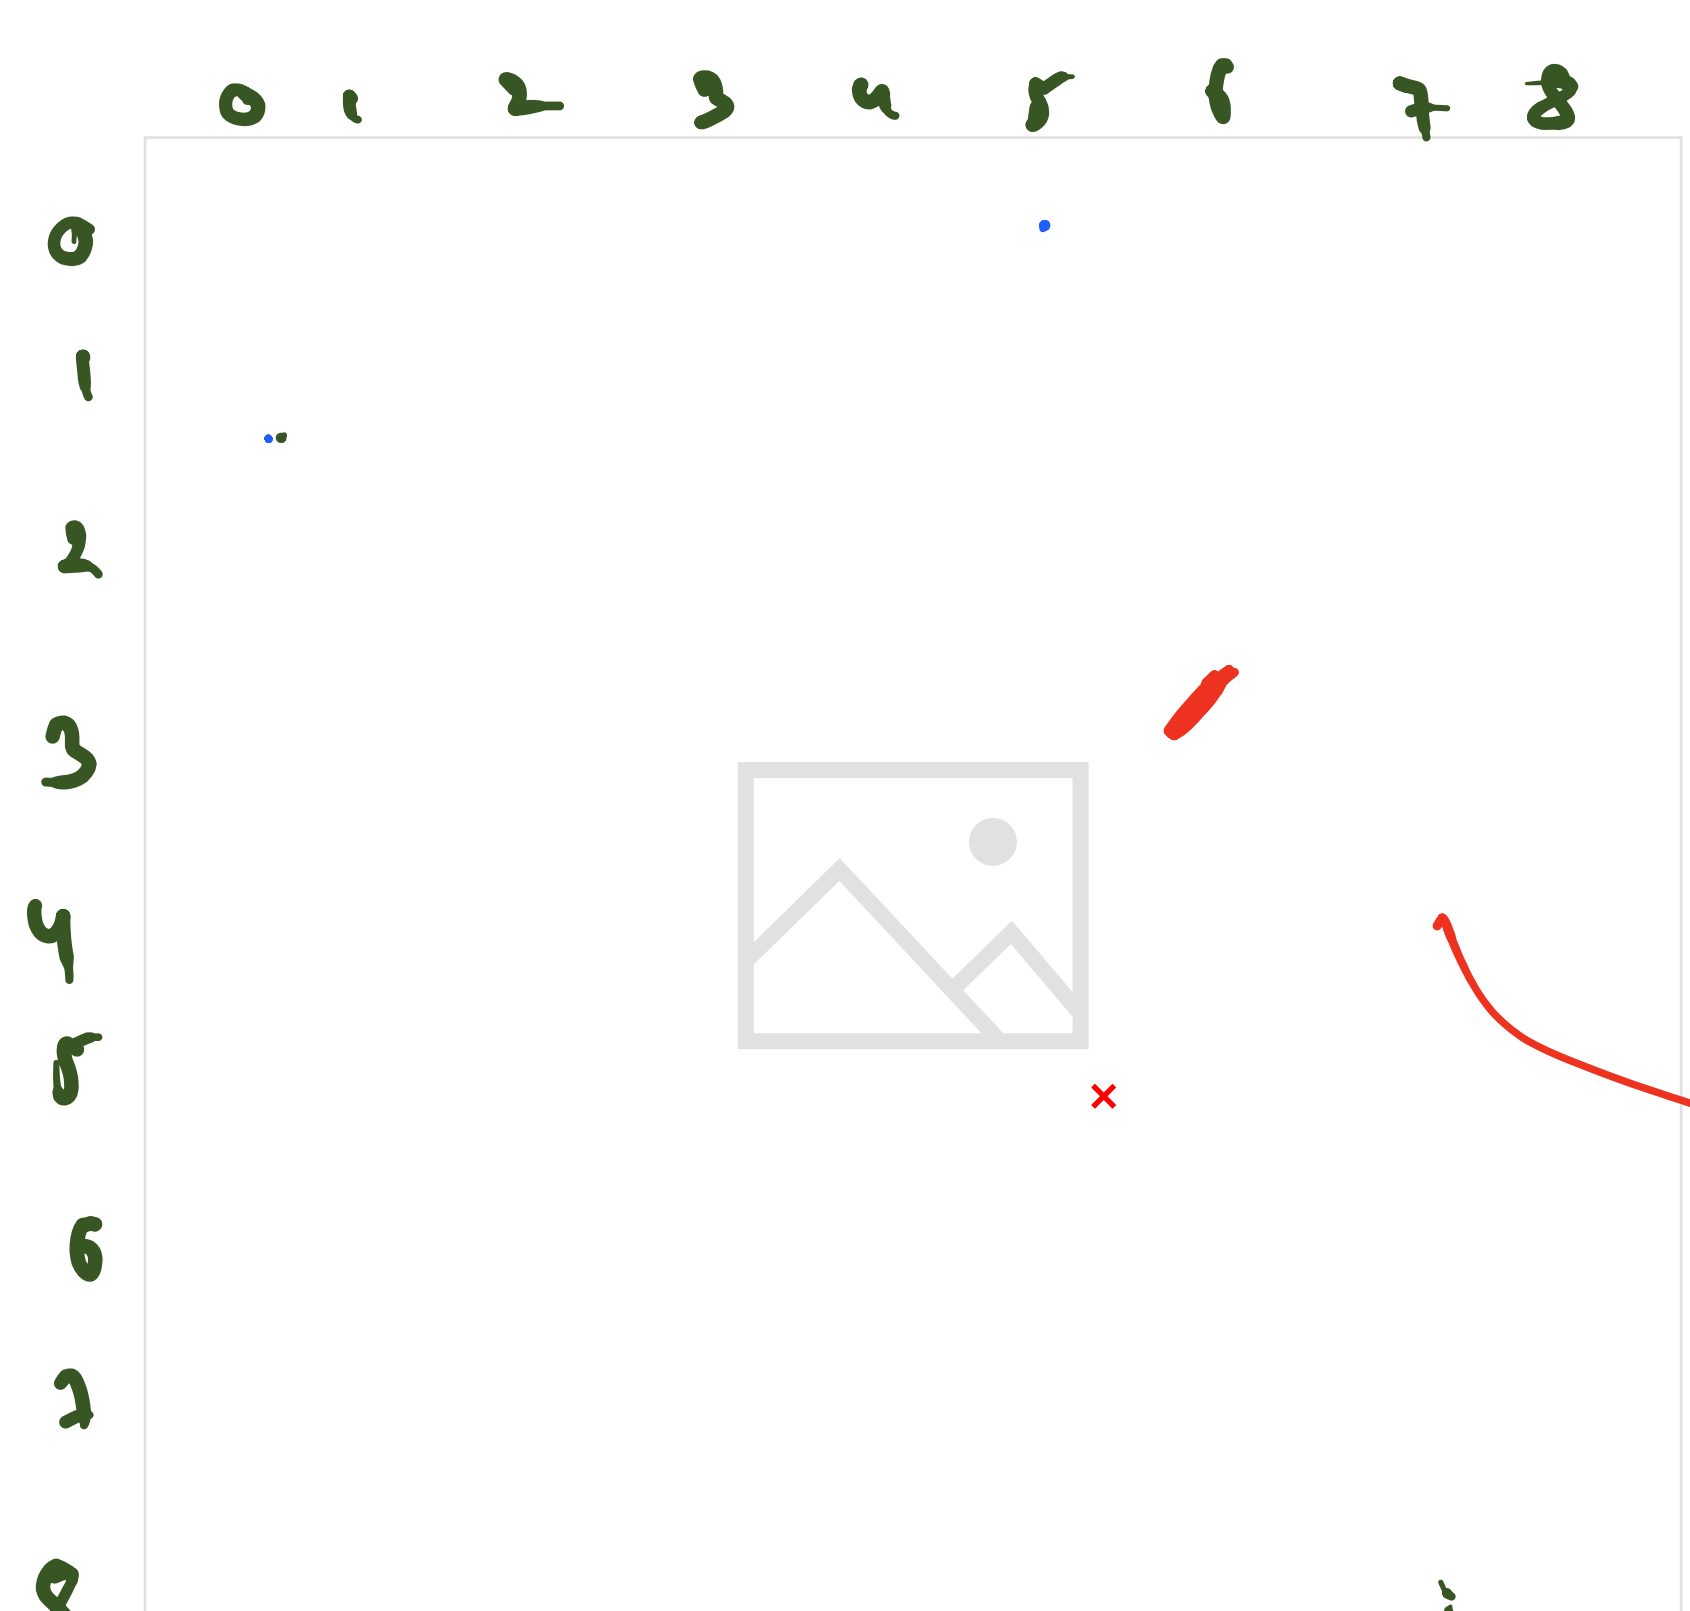

(3,8) Row, Col
C(0,1,2) [3,4,8] (6,7,8)
0 3 6
C(0,1,2) C(3,4,5) C(6,7,8)
0 5 8
(4,7)
Row = row - row * 9
Col = col - col * 3