VLAN Configuration in BDCOM GPON OLT in GUI Mode

Device used for testing

1. BDCOM GPON OLT, Model GP3600-08B
2. BDCOM xPON ONT, Model GP1702-1Gv4
3. One Router for uplink purpose

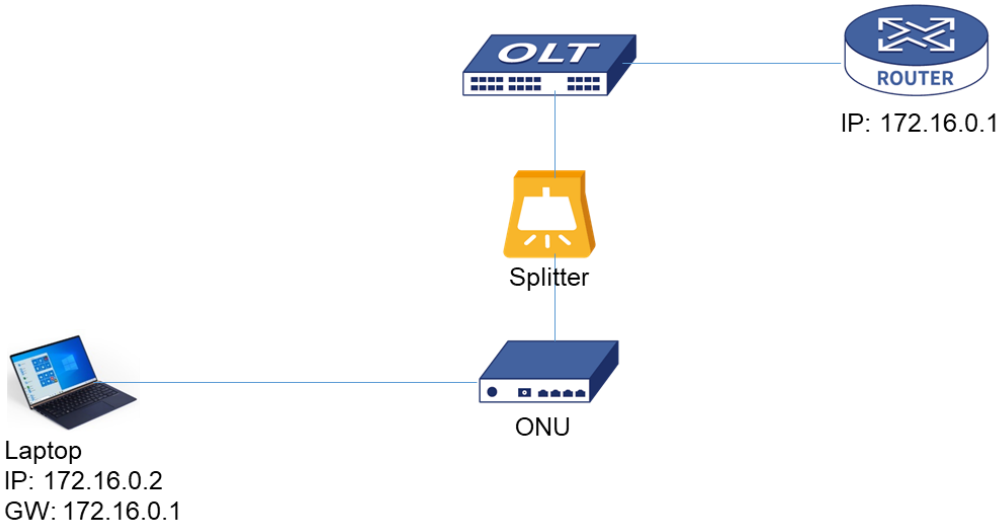

Figure01: Network Topology

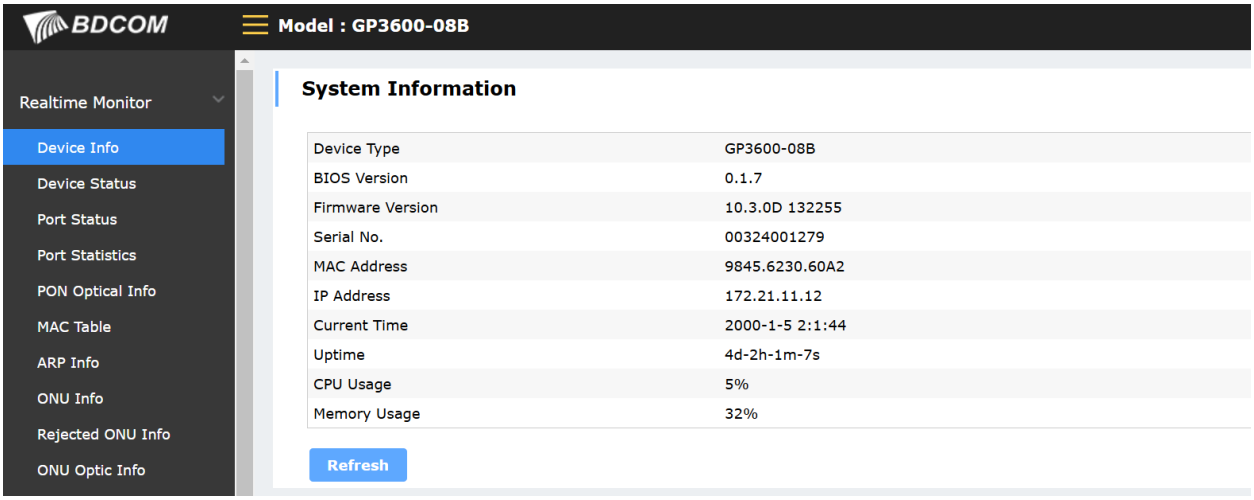

Figure02: Model and version of BDCOM GPON OLT

Step 01: Uplink port configuration.

Go to “Switch Configuration” then” Switch List” The uplink port Mode should be **dot1q-tunnel-uplink.** Then click on **Apply.**

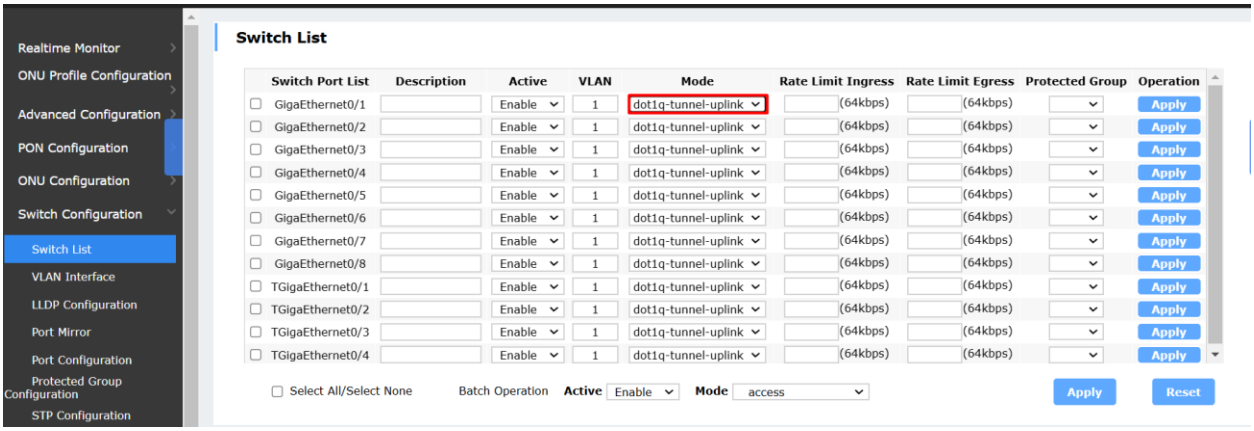

Figure03: OLT uplink configuration

Step 02: PON port configuration

The PON port should be **Trunk** to pass all the VLAN

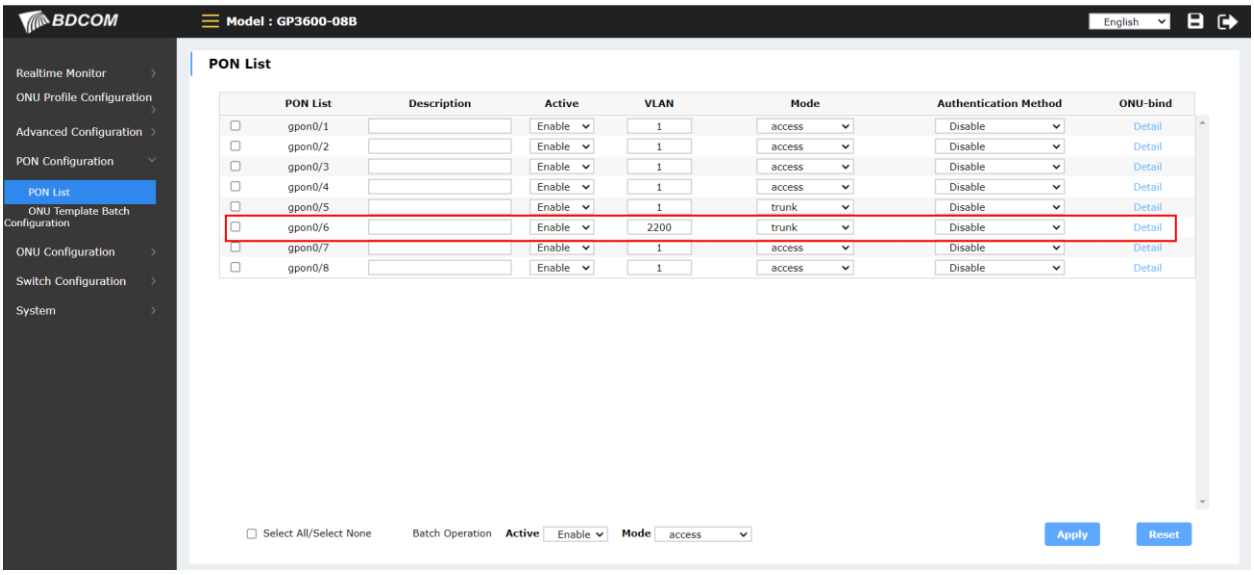

Figure04: OLT PON port configuration

Step 03: VLAN creation

Navigate **Advanced Configuration** > **VLAN Configuration** need to add the desired VLAN. Here we added VLAN 2200. Click on **Apply**

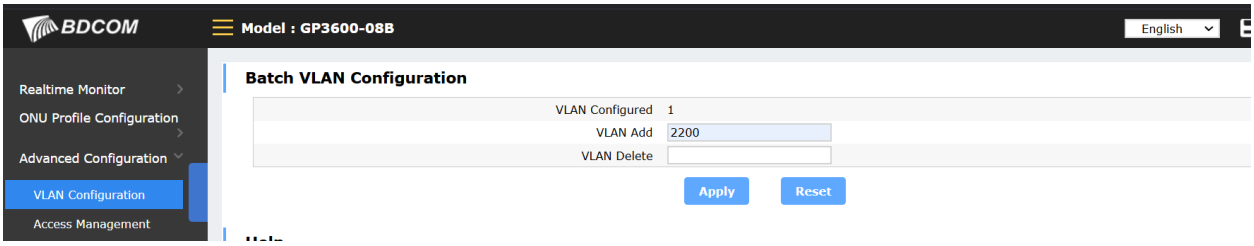

Figure05: Creating a new VLAN

Step 04: Profile Creation

Navigate **ONU Profile Configuration** > **VLAN**. Then click on **New**. A pop up will open to create a new profile. Let's the profile name is ***Vlan-2200***. Select "tag" from the dropdown of VLAN Mode and Port PVID **2200** which is the meaning of VLAN 2200. Click on **Apply**.

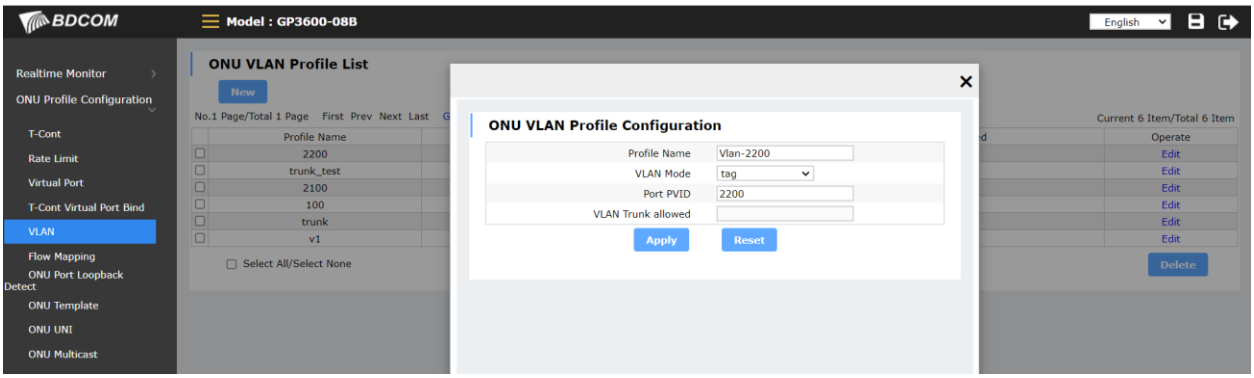

Figure06: Creation a new VLAN Profile with "tag" mode and VLAN 2200

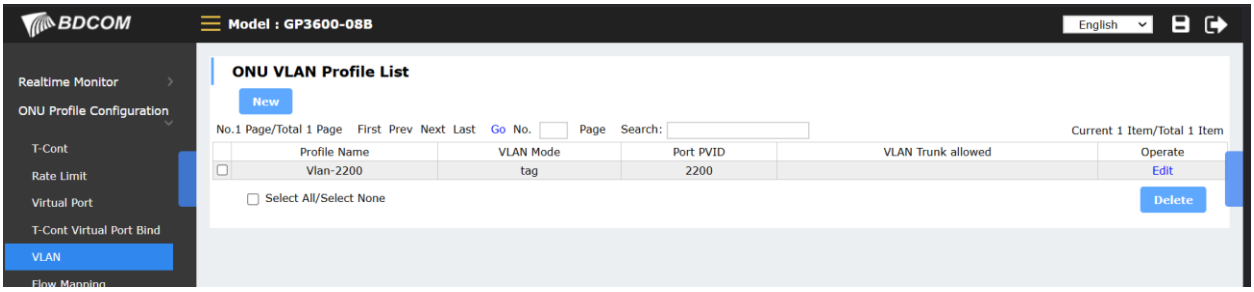

Figure07: ONU VLAN Profile List

Step 05: Apply the VLAN profile on the ONU

Navigate **ONU Configuration** > and click on ONU from **ONU List** click **LAN Config**. Select VLAN profile from drop down menu then **Apply**

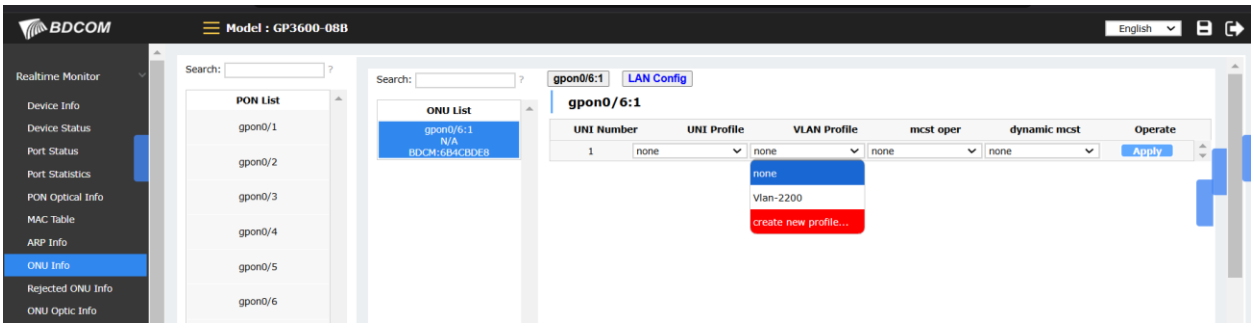

Figure08: Applying VLAN profile on the ONU

Test Method:

Ping from Client's PC to Gateway (Router)

C:\Users\LENOVO>ping 172.16.0.1

Pinging 172.16.22.1 with 32 bytes of data:
Reply from 172.16.0.1: bytes=32 time=1ms TTL=64
Reply from 172.16.0.1: bytes=32 time=2ms TTL=64
Reply from 172.16.0.1: bytes=32 time=1ms TTL=64
Reply from 172.16.0.1: bytes=32 time=1ms TTL=64

Ping statistics for 172.16.0.1:
    Packets: Sent = 4, Received = 4, Lost = 0 (0% loss),
Approximate round trip times in milli-seconds:
    Minimum = 1ms, Maximum = 2ms, Average = 1ms

THE END