
Description

12V 24V 7A 160W Dual DC Motor Driver Module H-bridge L298 logic Control Signal Optocoupler PWM Drive Reversing Braking

Principle Overview: 1.The H-bridge module gate circuit, motor reversing combination with MOS transistors, braking and speed control. Both have similar large output current L298 flexible logic control signal. 2.Interference approach: control signal optocoupler isolation, power spike voltage suppression. 3.Control signal logic: L298 using gates to achieve a similar control logic. 4.H-bridge Method: Use P, N complementary MOS transistors to achieve the H-bridge. 5.Power voltage protection: Use reset chip undervoltage protection.


Features: The dual H-bridge Rated 7A / Road Optocoupler isolation Undervoltage protection extremely small size, only 5.5x5.5cm Support voltage 7V ~ 24V, undervoltage protection Dual motor interface, each rated output current 7A L298 similar control logic, each supported by three-wire control is enabled, reversing and braking enable signal to an external PWM, reversing limit switch control signal can be connected in series control signal sink drivers, support the vast majority of single-chip direct drive Use optocoupler isolation for all control signals electrostatic discharge circuit


Specifications: Input voltage range: DC 6.5V ~ 27V Rated input voltage: DC 12V / 24V Output channels: 2-way Rated output current per channel: 7A Peak output current per channel: 50A Each rated output power: 84W (12V supply) 168W (24V power supply) The control signal voltage: 3 ~ 6.5V Each control signal current: 3 ~ 11mA The minimum effective PWM pulse width: 5us Working temperature: -25 ℃ ~ 80 ℃ Dimensions: 5.5x5.5x2.0cm Installation hole diameter is 3mm, suggested the use of M3 screws to fix. Note that when you install, do not let the back of a short circuit, you can add insulation pad or use Tongzhu raise the board.

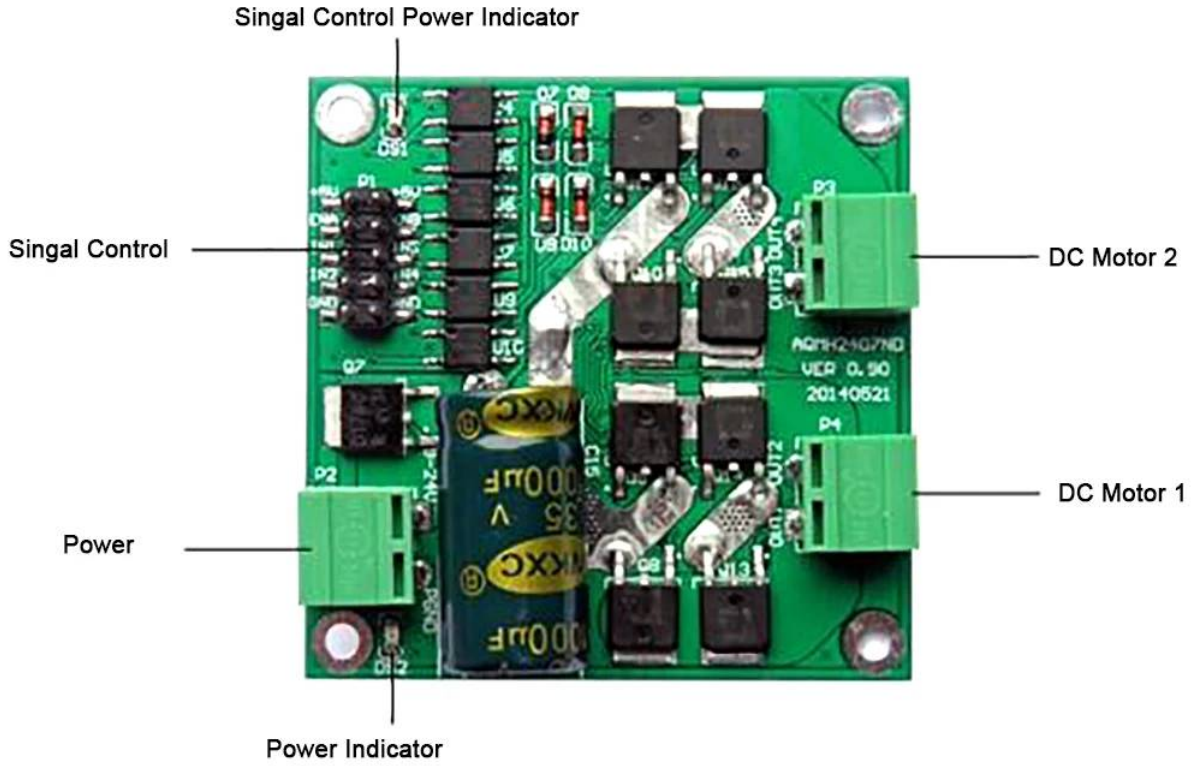


IN1	IN2	ENA	OUT1□OUT2output
0	0	×	Brakes
1	1	×	Vacant
1	0	PWM	PWM Forward Speed
0	1	PWM	PWM Reverse Speed
1	0	1	full forward
0	1	1	Full reversal


IN3	IN4	ENB	OUT3□OUT4output
0	0	×	Brakes
1	1	×	Vacant
1	0	PWM	Forward Speed
0	1	PWM	PWM Reverse Speed
1	0	1	Full Forward
0	1	1	Full reversal

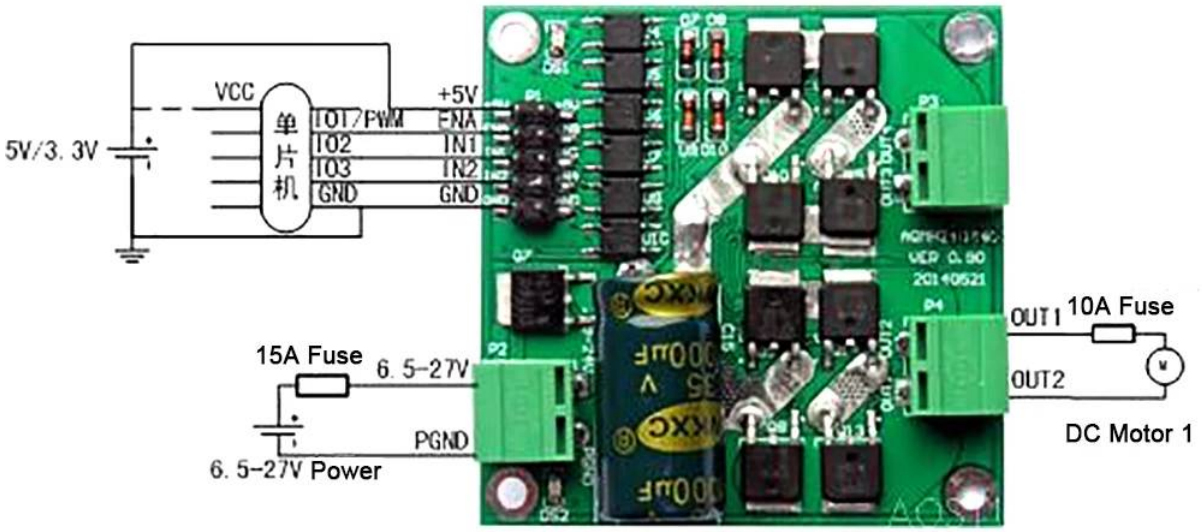
VCC
5V/3.3V
单片机
IO1/PWM
IO2
IO3
GND
+5V
ENA
IN1
IN2
GND
15A Fuse
6.5-27V
PGND
6.5-27V Power
OUT1
10A Fuse
OUT2
DC Motor 1

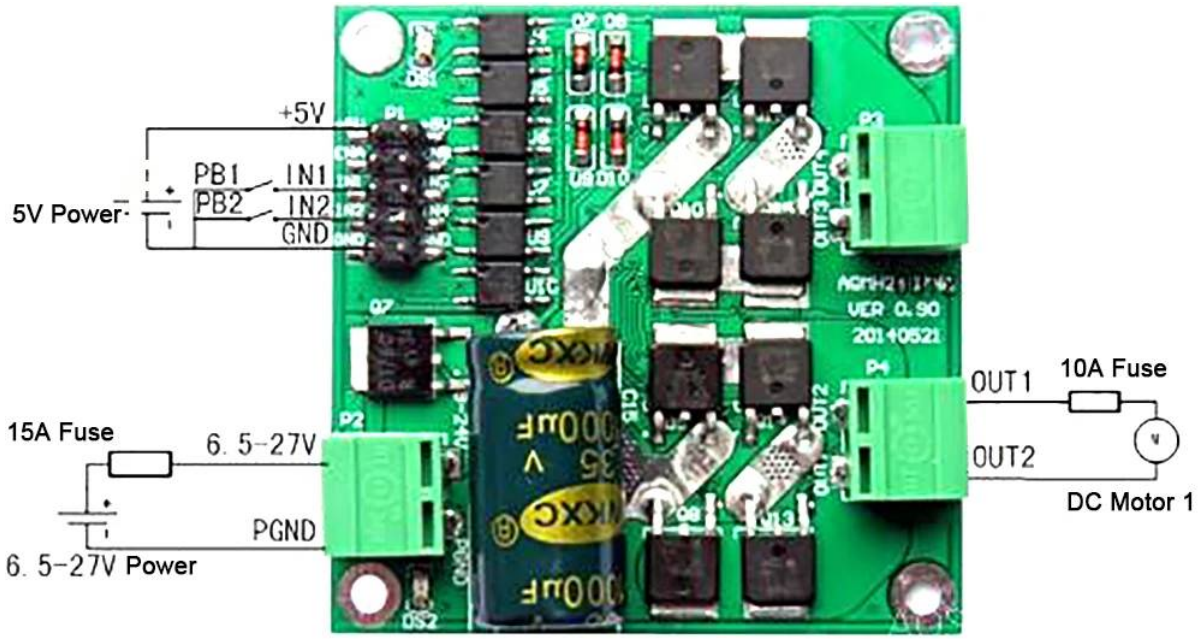

+5V
5V Power
PB1
PB2
IN1
IN2
GND
15A Fuse
6.5-27V
PGND
6.5-27V Power
OUT1
10A Fuse
OUT2
DC Motor 1

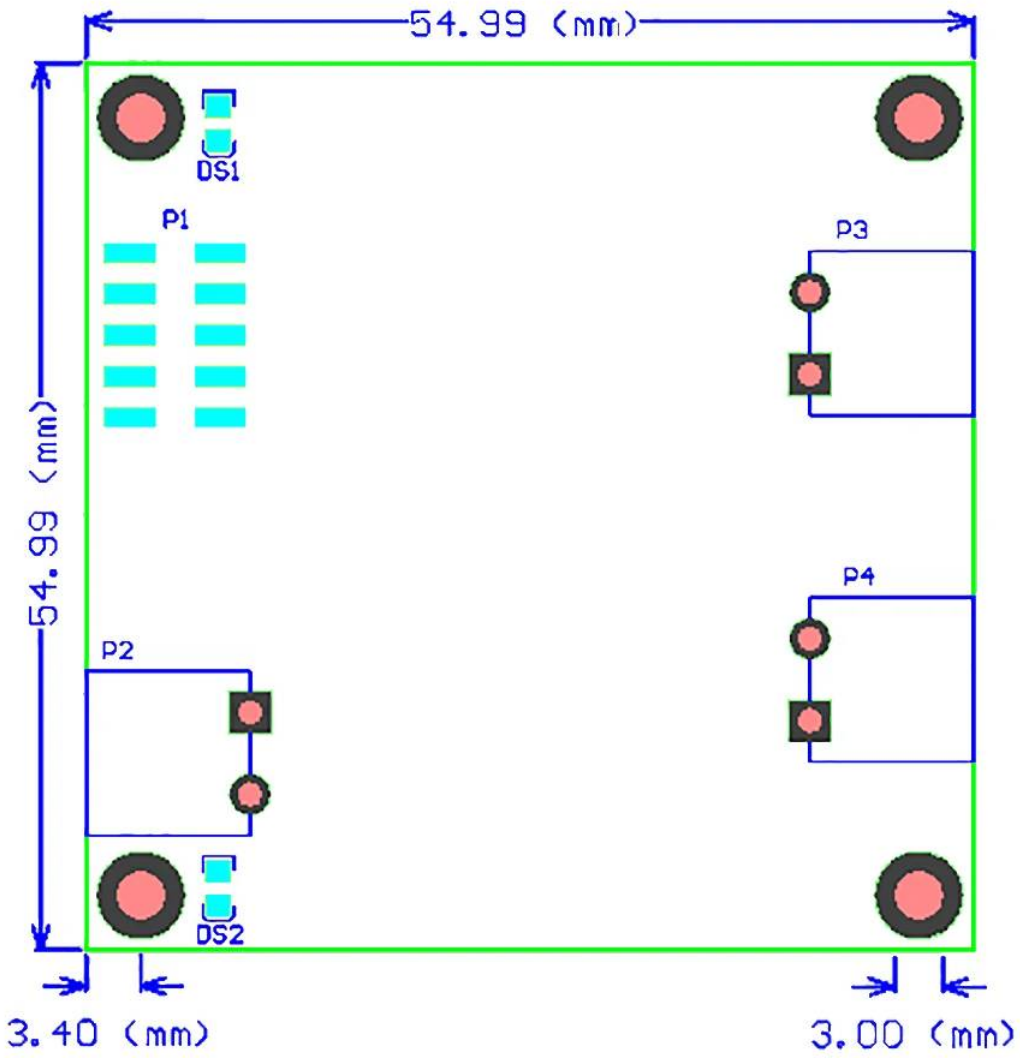
54.99 (mm)
54.99 (mm)
DS1
DS2
P1
P2
P3
P4
3.40 (mm)
3.00 (mm)


CZB6721960

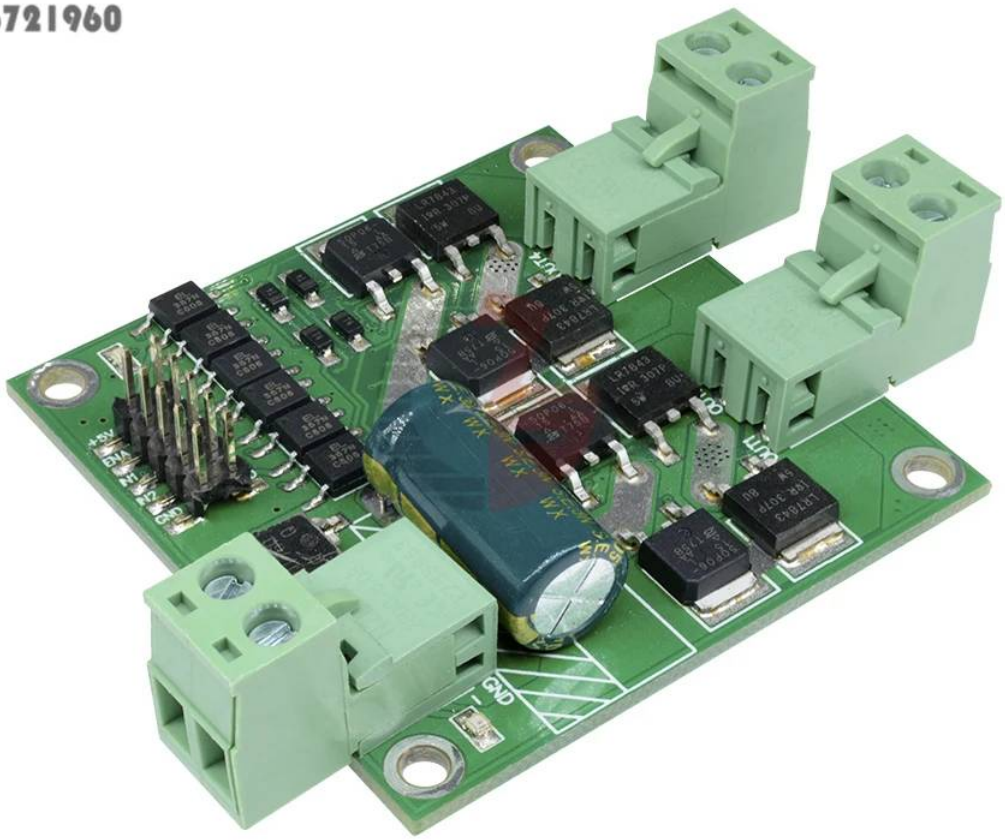


CZB6721960

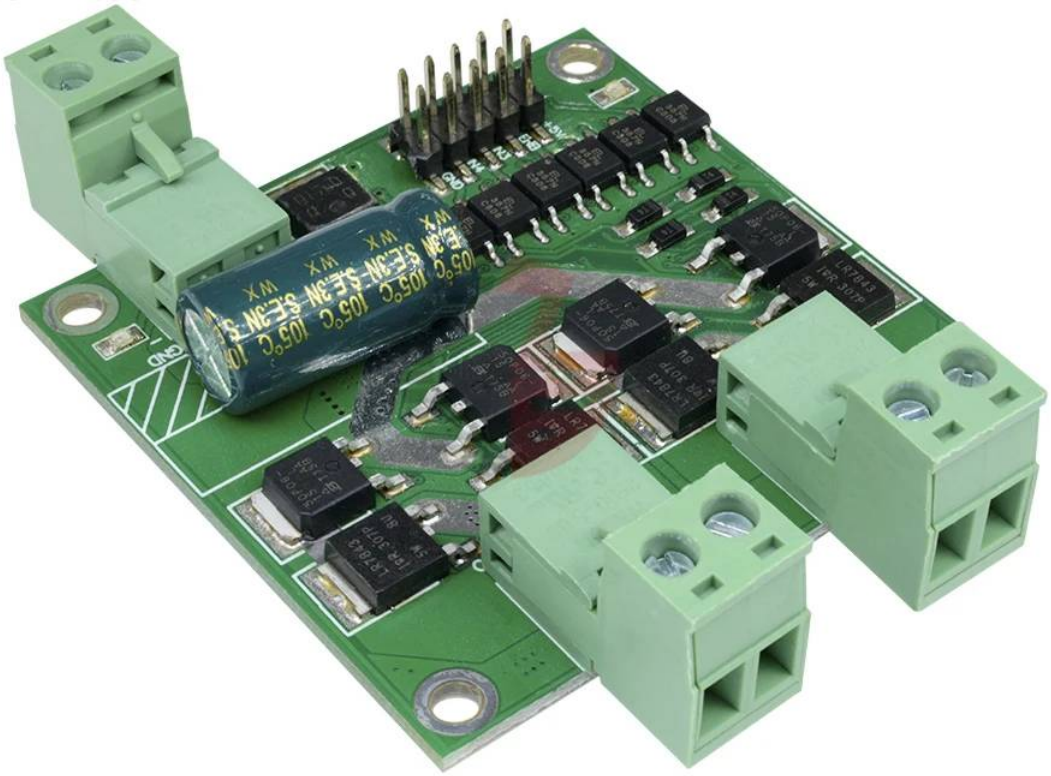


CZB6721960

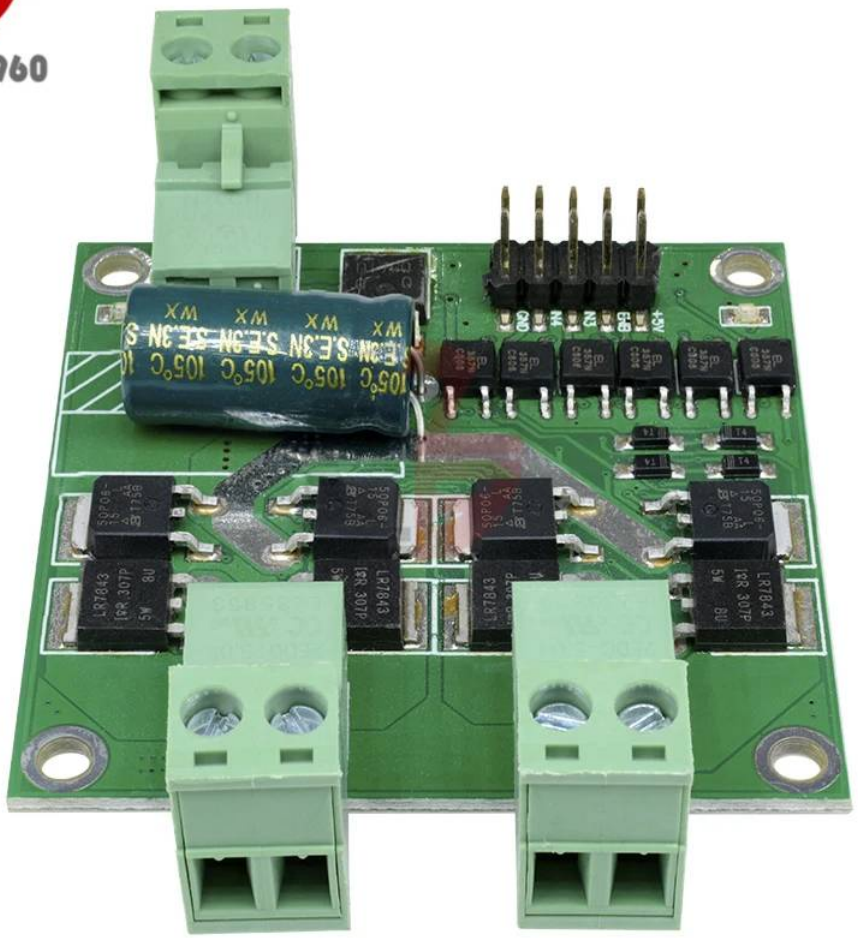


CZB6721960

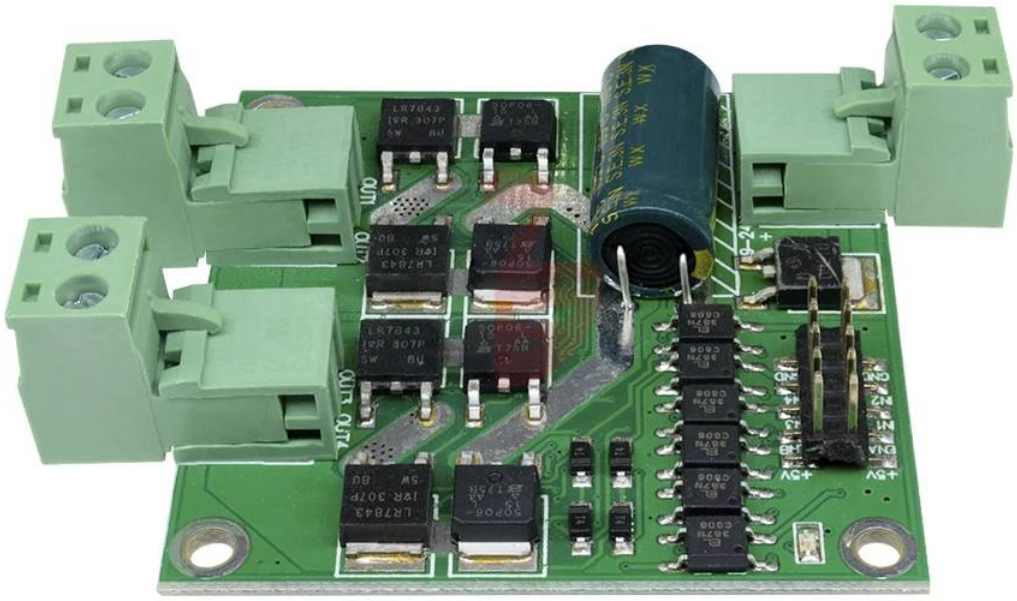


CZB6721960

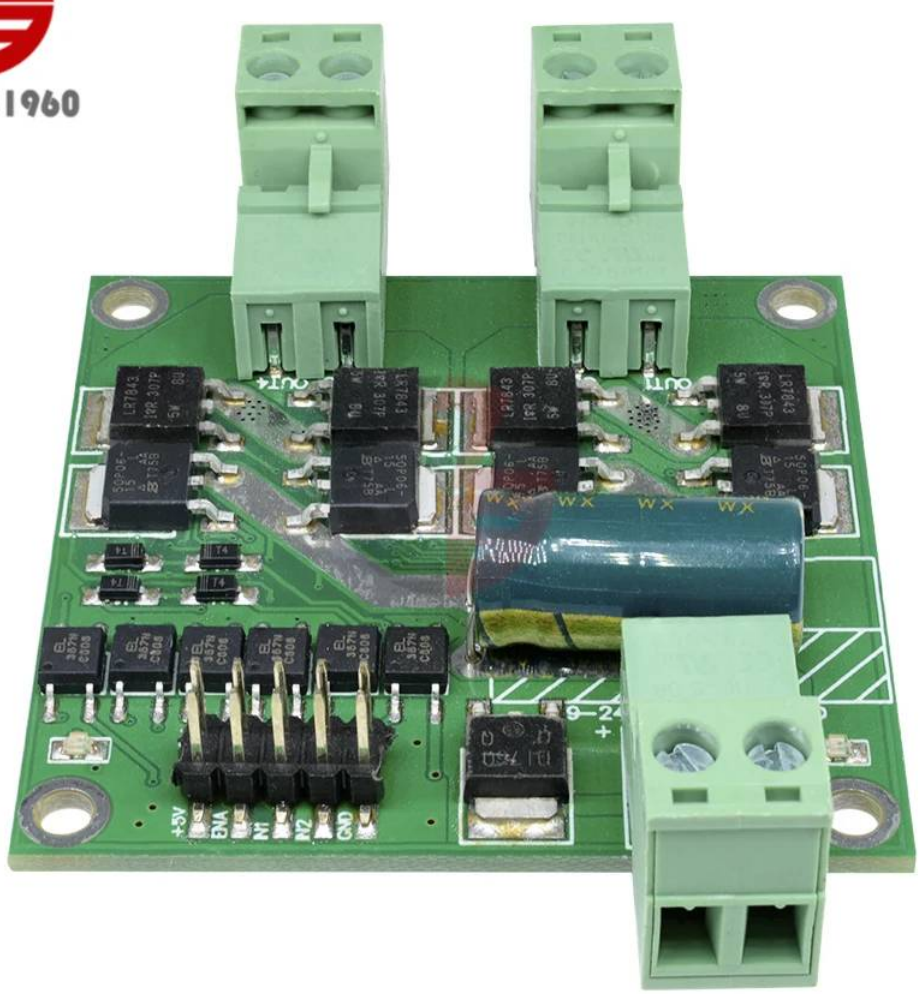


CZB6721960

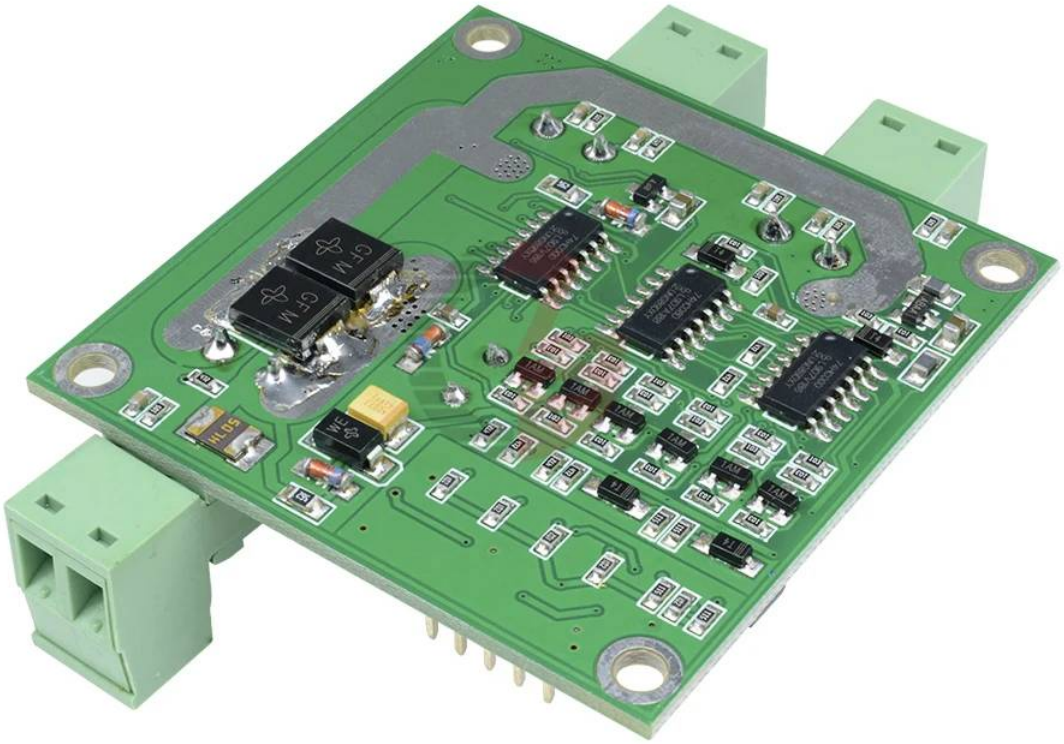

CZB6721960

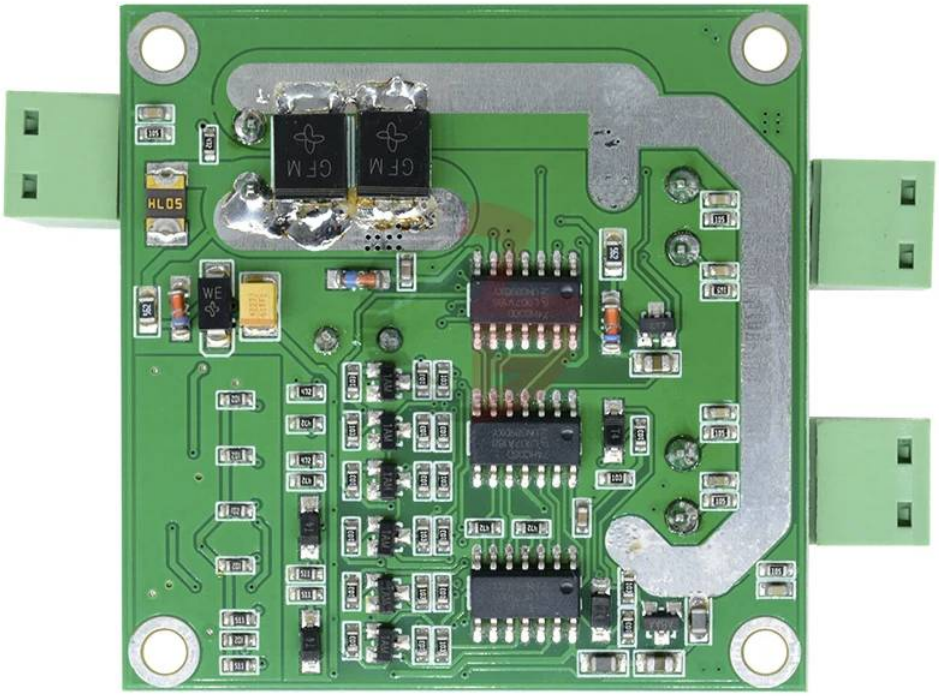

CZB6721960

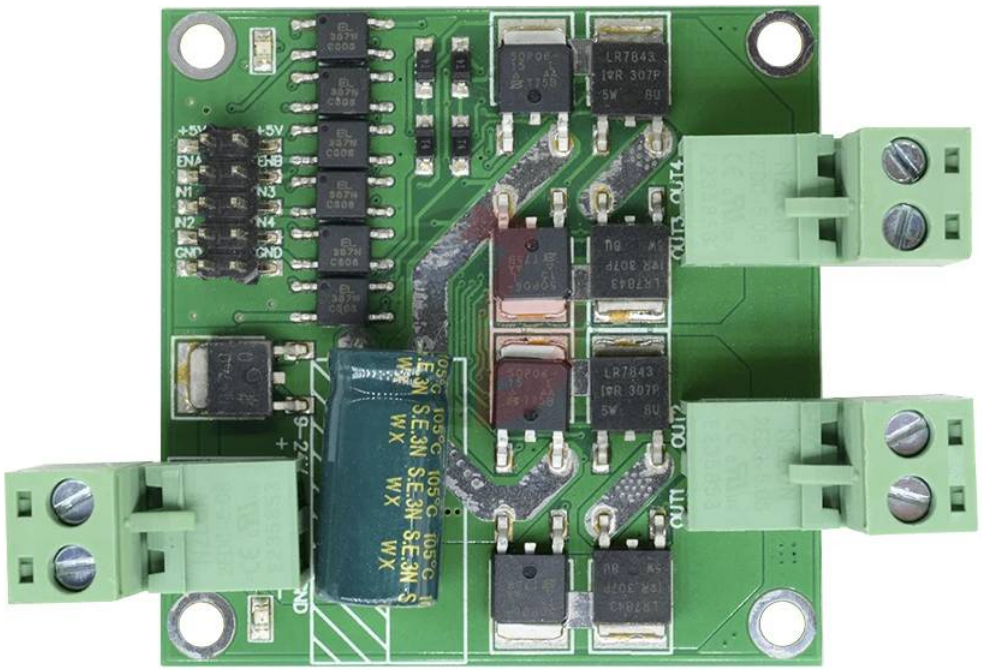
+5V
ENA
ENB
IN1
IN3
IN2
IN4
GND
GND
LR7843
IRR 307P
5W
8U
OUT4
OUT2
OUT1
GND