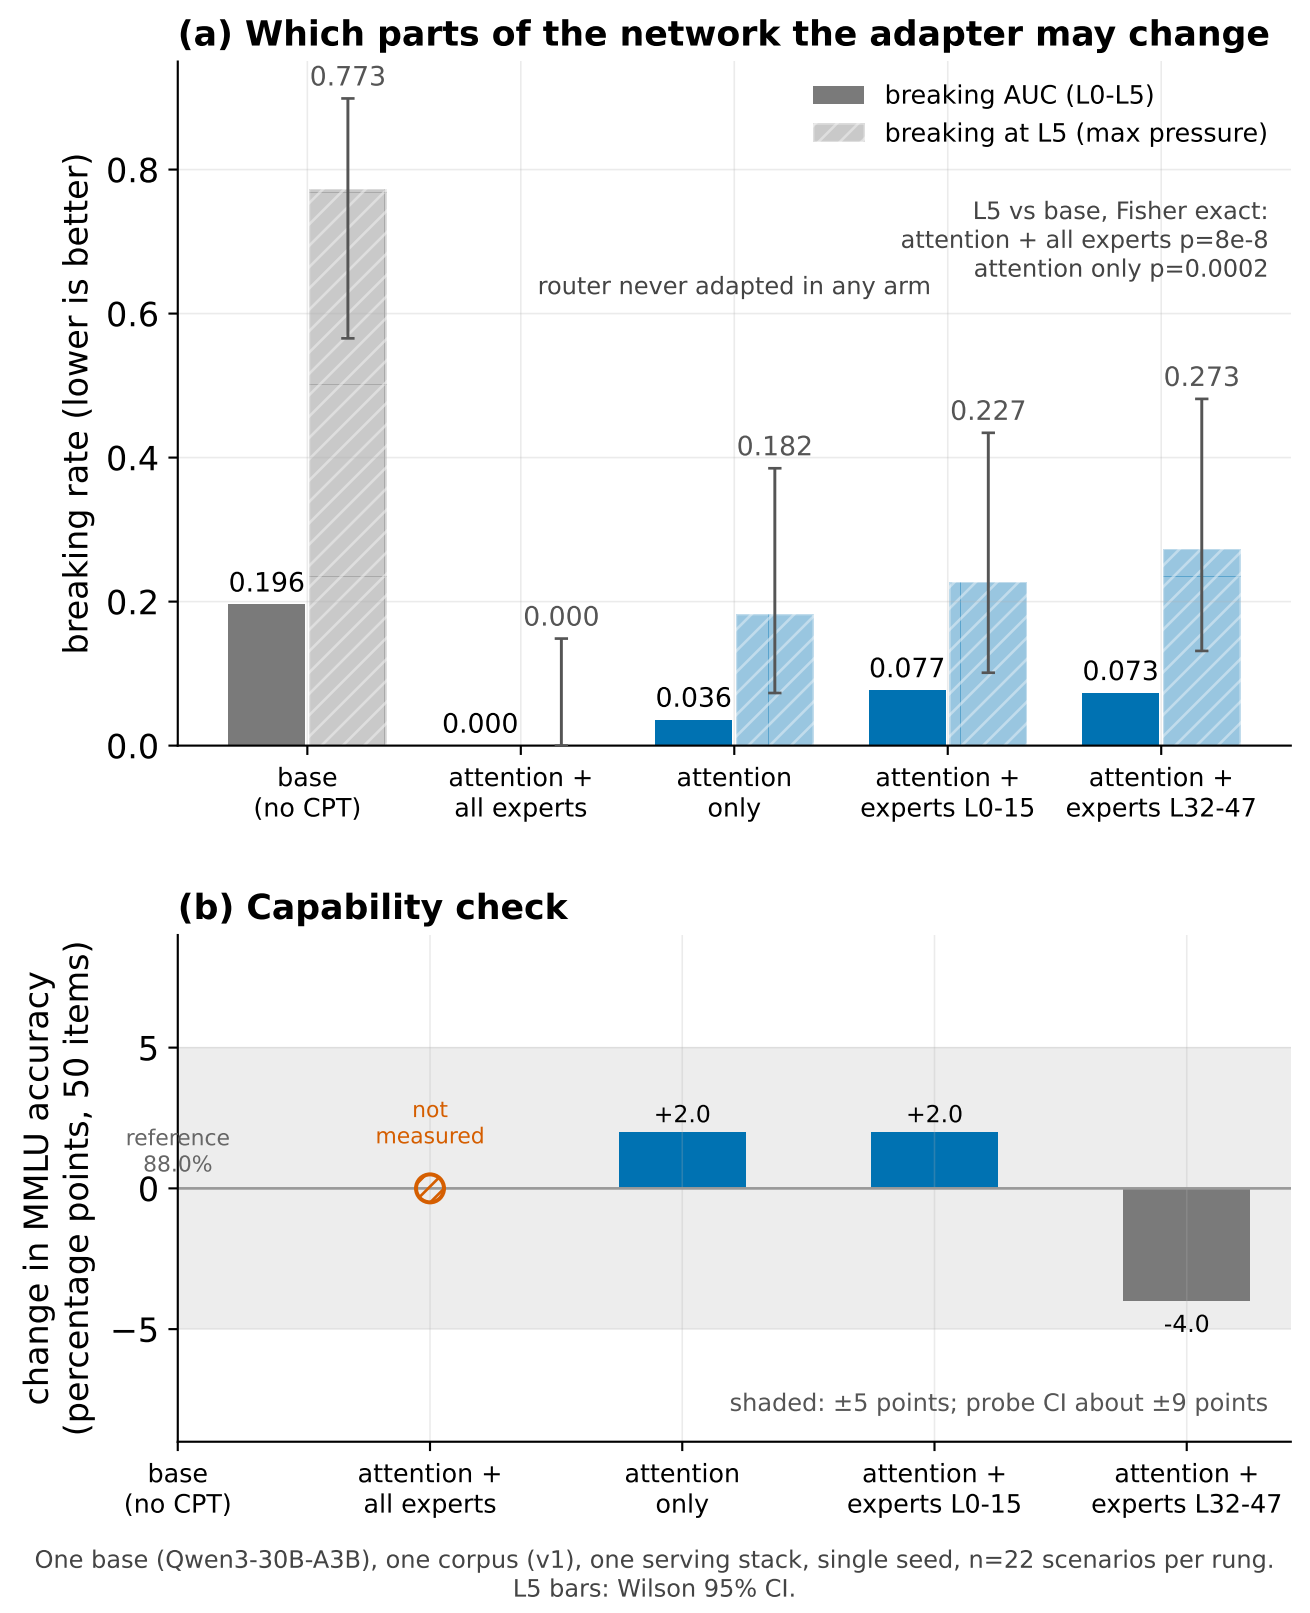
(a) Which parts of the network the adapter may change
breaking AUC (L0-L5)
breaking at L5 (max pressure)
L5 vs base, Fisher exact:
attention + all experts p=8e-8
attention only p=0.0002
router never adapted in any arm
breaking rate (lower is better)
0.0
0.2
0.4
0.6
0.8
0.773
0.196
0.000
0.000
0.182
0.036
0.227
0.077
0.273
0.073
base (no CPT)
attention + all experts
attention only
attention + experts L0-15
attention + experts L32-47
(b) Capability check
change in MMLU accuracy (percentage points, 50 items)
5
0
−5
reference 88.0%
not measured
+2.0
+2.0
-4.0
shaded: ±5 points; probe CI about ±9 points
base (no CPT)
attention + all experts
attention only
attention + experts L0-15
attention + experts L32-47
One base (Qwen3-30B-A3B), one corpus (v1), one serving stack, single seed, n=22 scenarios per rung.
L5 bars: Wilson 95% CI.