Measurements, Files and Spreadsheets

Engineering Computation with Python — Chapter 10

Muním Zabidi

Faculty of Electrical Engineering, Universiti Teknologi Malaysia

Table of Contents

1. From the Console to a File
2. Formatted Output with f-Strings
3. Files: Text, Binary, and Beyond
4. Spreadsheets and CSV
5. Case Study: Mesh Circuits

© Muním Zabidi

Table of Contents

1. From the Console to a File
2. Formatted Output with f-Strings
3. Files: Text, Binary, and Beyond
4. Spreadsheets and CSV
5. Case Study: Mesh Circuits

Two Ways Data Reaches a Python Program

Up to now, every number in your programs was typed directly into the code. Real engineering data arrives differently.

Prompt data

Entered or displayed at the console while a script runs. Temporary — it disappears once the program closes.

Import/export data

Stored in a file (`.csv`, `.xlsx`, `.txt`, ...). Permanent, shareable, and usually larger.

This chapter's purpose

Close the gap between a laboratory measurement and a Python calculation — both directions.

© Muním Zabidi

The Workflow Is Always the Same



Consider the bench recording from earlier chapters. Loading it takes one line, and the first thing to do afterwards is always to look at what arrived.

© Muním Zabidi

Loading and Checking a Real Recording

```
import pandas as pd

data = pd.read_csv('bench_rc.csv')
print(data.shape)     # (101, 4)
print(data.head(3))
```

Engineering sanity checks, every time:

- **Shape.** 101 rows at 20 ms covers two seconds — matches the experiment.
- **Units.** Column names carry them: volts, milliamps, °C.
- **Magnitude.** First current 2.55 mA matches 12 V/4.7 kΩ.
- **Completeness.** `data.isna().sum()` finds the logger dropout.

© Munim Zabidi

Requesting Input from the User

`input()` always returns a string — numeric responses must be converted explicitly.

```
text   = input("Enter a text: ")
number = float(input("Enter a number: "))
```

```
height = float(input('Enter height: '))
width  = float(input('Enter width: '))
area = 0.5 * width * height
print(f'Area = {area}')
```

Console session:

```
Enter height: 10
Enter width: 20
Area = 100.0
```

Three Ways to Display a Value

Direct display	print()	print() + f-string

`x = 10`
`x`
`10`
	`x = 10`
	`print(x)`
	`10`
		`x = 10`
		`print(f'x is {x}')`
		`x is 10`

The difference

Direct display and `print()` show only the value. An f-string lets the output include explanatory text along with it — the next section develops this fully.

Table of Contents

1. From the Console to a File
2. **Formatted Output with f-Strings**
3. Files: Text, Binary, and Beyond
4. Spreadsheets and CSV
5. Case Study: Mesh Circuits

Controlling How a Value Looks

An f-string offers far more control than a basic `print()`: width, decimal places, and notation — all inside the braces.

```
formatted_string = f"text {variable1:.2f} more text {variable2:d}"
```

- Curly braces `{}` are placeholders for variables.
- A format specifier after the colon controls width and precision (e.g. `.2f` = 2 decimal places).
- Formatting affects only display — never the stored value.

Common Format Specifiers

Value Type	Code	Example	Meaning
Integer	d	`{v:d}`	Signed decimal integer
Float	f	`{v:7.2f}`	Width 7, 2 decimal places
String	s	`{v:s}` or `{v}`	Plain string output
Scientific	e/E	`{v:e}`	Exponential notation

A Single Value, Several Ways

```
cows = 5
print(f'There are {cows:7.2f} cows in the pasture')
```

```
There are    5.00 cows in the pasture
```

Reading `{cows:7.2f}`

`7` sets a minimum field width of 7 characters (digits, point, and padding). `.2f` sets 2 decimal places.

Formatting Several Values at Once

Consistent column widths are what make a printed table readable:

```
L = [[20, 3.3], [20000, 3300]]
print(f'{L[0][0]:2.2f}m is equivalent to {L[1][0]:5d}mm')
print(f'{L[0][1]:2.2f}m is equivalent to {L[1][1]:5d}mm')
```

```
20.00m is equivalent to 20000mm
3.30m is equivalent to  3300mm
```

A 2D list is indexed `L[row][column]` — double brackets, not `L[row, column]`.

Table of Contents

1 From the Console to a File

2 Formatted Output with f-Strings

3 **Files: Text, Binary, and Beyond**

4 Spreadsheets and CSV

5 Case Study: Mesh Circuits

Import, Export, Text, Binary

Direction

- **Import** — disk → Python
- **Export** — Python → disk

Representation

- **Text** — readable (CSV, TXT, JSON)
- **Binary** — not readable in a text editor (images, audio, serialized objects)

The pattern, regardless of format

`open()` creates a file object; `read()` and `write()` move data through it. Everything that follows is a variation on this one idea.

Reading and Writing Plain Text

```python
# Writing to a text file
with open('example.txt', 'w') as file:
    file.write('Hello, World!')

# Reading from a text file
with open('example.txt', 'r') as file:
    content = file.read()
    print(content)  # Output: Hello, World!
```

The `with` statement

Opens the file, hands it to `file`, and closes it automatically when the block ends — even if an error occurs inside.

Binary Data: Same Pattern, Different Mode

Adding b to the mode writes raw bytes — for data not meant to be read by eye, like instrument recordings.

Serializing a Python object:

```
import pickle
data = {'key': 'value'}
with open('data.pkl', 'wb') as f:
    pickle.dump(data, f)

with open('data.pkl', 'rb') as f:
    loaded = pickle.load(f)
```

Saving a NumPy array:

```
import numpy as np
arr = np.array([1, 2, 3])
np.save('array.npy', arr)

loaded = np.load('array.npy')
```

`pickle` serializes any Python object; `numpy.save/load` is the NumPy-specific equivalent.

© Muním Zabidi

Choosing a Format: When to Use What

- **Text file** (`open`, `read`, `write`) — small, human-readable notes or logs.
- **pickle** — saving an arbitrary Python object (a dictionary, a trained model) exactly as it was.
- **NumPy `.npy`** — saving a large array efficiently, without converting to text.
- **CSV / spreadsheet** — tabular measurement data meant to be shared, inspected, or opened in Excel.

This chapter's focus

Spreadsheets and CSV are the formats engineers meet daily — the rest of this chapter covers them in depth.

Table of Contents

1 From the Console to a File

2 Formatted Output with f-Strings

3 Files: Text, Binary, and Beyond

4 **Spreadsheets and CSV**

5 Case Study: Mesh Circuits

Reading and Writing a Spreadsheet: Syntax

```
# Reading data
data = pd.read_excel(filename, sheet_name='Sheet1',
                     usecols='B:Z', header=None)

# Selecting rows/columns
selected_data = data.iloc[1, 1:]

# Writing data back
output_data.to_excel(filename, sheet_name='Sheet1',
                     startcol=1, startrow=2,
                     index=False, header=False)
```

`startcol`/`startrow` target where writing begins; `index=False` skips saving the DataFrame's row index into the sheet.

Worked Example: Celsius to Fahrenheit

A room temperature log sits in `tempData.xlsx`. Convert every reading to Fahrenheit and append it to the same file.

```
temp_c = pd.read_excel(file_path, sheet_name='Sheet1',
                       header=None).iloc[1, 1:]
temp_f = temp_c * 9/5 + 32

with pd.ExcelWriter(file_path, engine='openpyxl', mode='a',
                    if_sheet_exists='overlay') as writer:
    output_data = pd.DataFrame([temp_f])
    output_data.to_excel(writer, sheet_name='Sheet1',
                         startcol=1, startrow=2,
                         index=False, header=False)
```

`mode='a'` with `if_sheet_exists= 'overlay'` adds data without erasing what is already there.

Excel vs. CSV: Same Idea, Fewer Moving Parts

Feature	Excel	CSV
Library	`openpyxl` required	Only `pandas`
Reading	`pd.read_excel(...)`	`pd.read_csv(...)`
Writing	`pd.ExcelWriter(...)`	`.to_csv(...)`
Sheets	`sheet_name`	None
Write mode	Overlay existing cells	Append a new row
Cell targeting	`startrow`, `startcol`	Not supported

CSV is the default for measured data

Simpler, universally readable, and exactly what a data logger or lab instrument usually exports.

© Muním Zabidi

The Same Conversion, with CSV

```
data = pd.read_csv(file_path, header=None)
temp_c = pd.to_numeric(data.iloc[1, 1:])
temp_f = temp_c * 9/5 + 32

# CSV has no cells to target -- just append a new row
output_data = pd.DataFrame([temp_f])
output_data.to_csv(file_path, mode='a',
                   index=False, header=False)
```

No sheet name, no `startrow`/`startcol` — CSV has no concept of cell targeting, so the converted row is simply appended at the end.

Table of Contents

1 From the Console to a File

2 Formatted Output with f-Strings


3 Files: Text, Binary, and Beyond

4 Spreadsheets and CSV

5 **Case Study: Mesh Circuits**

The Problem: Ten Circuits, One Spreadsheet

Revisit the mesh-circuit analysis from Chapter 9, now driven entirely by spreadsheet data: solve I_1 and I_2 for ten resistor/voltage configurations stored in `circuit_analysis.xlsx`.

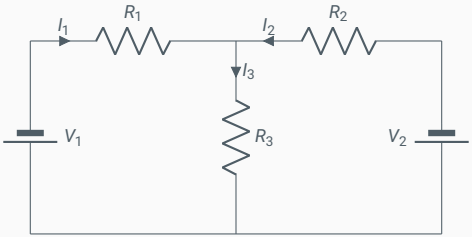

The script sends `R` (resistances) and `V` (voltages) from the spreadsheet into a helper module, `mesh_solver.py`, for each of the ten rows.

© Munim Zabidi

The Spreadsheet Layout

Columns B–D hold R_1, R_2, R_3; columns E–F hold V_1, V_2; columns G–H are reserved for the computed I_1, I_2.

	R_1	R_2	R_3	V_1	V_2
Set 1	11	2	3	10	−40
Set 2	5	20	10	10	−20
Set 3	16	16	16	20	20
…	…	…	…	…	…
Set 10	100	25	100	−20	10

Ten rows in, ten pairs of currents out — by hand, this would mean solving the same 2×2 system ten times.

Step 1: Separating Resistances from Indicators

The R array packs resistor values and which loop each belongs to into one array:

$$R = \begin{bmatrix} R_1 & R_2 & R_3 \\ 1 & 0 & 1 \\ 0 & 1 & 1 \end{bmatrix}$$

```
def separate_ir(R):
    r = R[0, :]                    # resistor values
    i = R[1:, :].astype(bool)      # which loop each belongs to
    total_loops = R.shape[0] - 1
    return i, r, total_loops
```

Step 2: Assembling and Solving $Ax = b$

```
def mesh_solver(V, R):
    i, r, M = separate_ir(R)
    Rmat = np.zeros((M, M))
    for m in range(M):
        for n in range(M):
            ind_i = np.logical_and(i[m, :], i[n, :])
            if n != m:
                Rmat[m, n] = -np.sum(r[ind_i])
            else:
                Rmat[m, n] = np.sum(r[ind_i])
    I = np.linalg.solve(Rmat, V)
    return I
```

The same operation as Chapter 9's **Ax** = **b** — now driven entirely by data read from a file.

```
df = pd.read_excel(file_path, sheet_name='Sheet1')
data = df.to_numpy()
I1_list, I2_list = [], []

for row in data:
    R1, R2, R3 = row[1:4]
    V1, V2 = row[4:6]
    R = np.array([[R1, R2, R3], [1, 0, 1], [0, 1, 1]])
    V = np.array([V1, V2])
    I = mesh_solver(V, R)
    I1_list.append(I[0]); I2_list.append(I[1])
```

One loop, ten configurations solved — the pattern scales to a hundred rows exactly as easily.

© Muním Zabidi

Step 4: Writing the Results Back

```
I_values_df = pd.DataFrame({'I1': I1_list, 'I2': I2_list})

with pd.ExcelWriter(file_path, mode='a',
                    if_sheet_exists='overlay') as writer:
    I_values_df.to_excel(writer, startcol=6, startrow=1,
                         index=False, header=False)
```

The full cycle, completed

Data moved from spreadsheet → Python → spreadsheet, with the original columns untouched and I_1, I_2 filled in alongside them.

Why This Case Study Matters

This case study is not really about mesh circuits — it is a template for almost any engineering computation on tabular data:

1. Read the spreadsheet into a DataFrame.
2. Loop over rows, extracting the inputs each row needs.
3. Call a tested function (`mesh_solver`) that does the actual engineering calculation.
4. Collect the results and write them back.

The same shape reappears

Swap `mesh_solver` for a stress calculation, a calibration curve, or a filter design, and the surrounding read → loop → write structure barely changes.

Where This Is Going

This chapter closed the gap between a real measurement and a Python calculation — both directions, prompt and file alike.

- `input()` always returns a string; convert explicitly before computing with it.
- f-strings control display, never the stored value.
- CSV is the default interchange format for measured data; Excel adds sheets and cell targeting.
- The mesh-circuit case study is the template: read, loop, compute, write back.

Next: Errors, Missing Data and Outliers

© Muním Zabidi