



LOGIC GATES




AND

A	B	Output
0	0	0
0	1	0
1	0	0
1	1	1




OR

A	B	Output
0	0	0
0	1	1
1	0	1
1	1	1




XOR

A	B	Output
0	0	0
0	1	1
1	0	1
1	1	0




NAND

A	B	Output
0	0	1
0	1	1
1	0	1
1	1	0



NOR

A	B	Output
0	0	1
0	1	0
1	0	0
1	1	0




XNOR

A	B	Output
0	0	1
0	1	0
1	0	0
1	1	1

JK Flip-Flop

JK flip-flop is the modified version of the SR flip-flop. It operates with only positive clock transitions or negative clock transitions. The circuit diagram of JK flip-flop is shown in the diagram to the right.

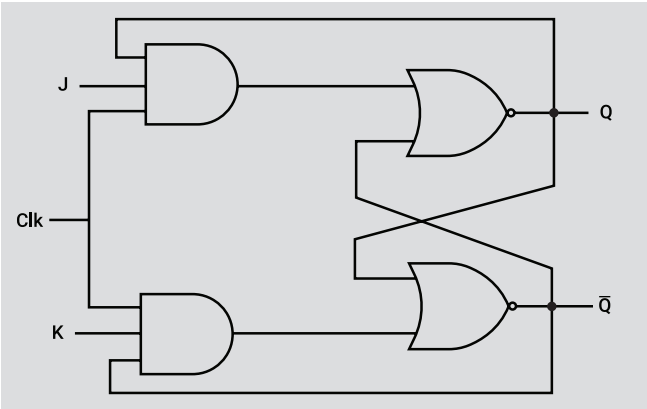

Clk	J	K	Q	Q'	State
1	0	0	Q	Q'	No change in state
1	0	1	0	1	Resets Q to 0
1	1	0	1	0	Sets Q to 1
1	1	1	-	-	Toggles