Tester 4: Review: Returns, Ledgers, Reports

E.C Commutator Application – test assignment

Before you start


Item	Detail
Open	https://nagasadam.github.io/ec-commutator/test/
Username / password	tester4 / (given to you separately)
Version	Test copy with sample data. The orange pill says “TEST COPY · not real data”.
Your module	Returns & rejects · Ledgers · Reports


All four testers work on the **same** sample data at the same time. Other people’s entries will change totals, so judge each result by the **change** your entry causes, not by the absolute figure. Stick to your module’s entries so results stay clear. Never use Reset or “Delete every business”: it wipes the shared data for all four testers. Use a computer browser (Chrome) for the first pass, then repeat a few steps on a phone.


Returns & rejects

Customer returns create a credit note, supplier returns create a debit note, and rejects reduce stock.


Record a return

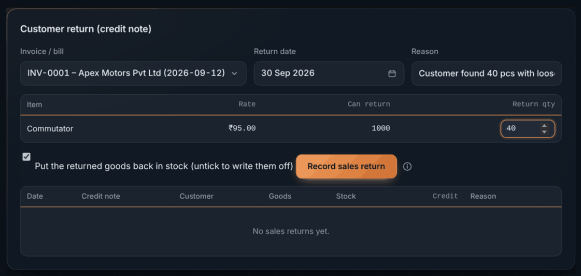

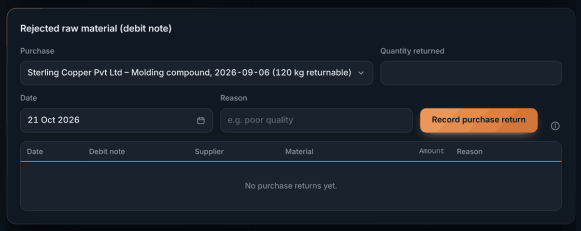

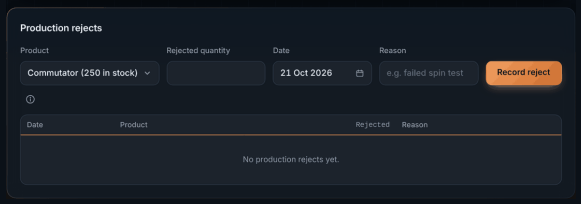

Returns recorded

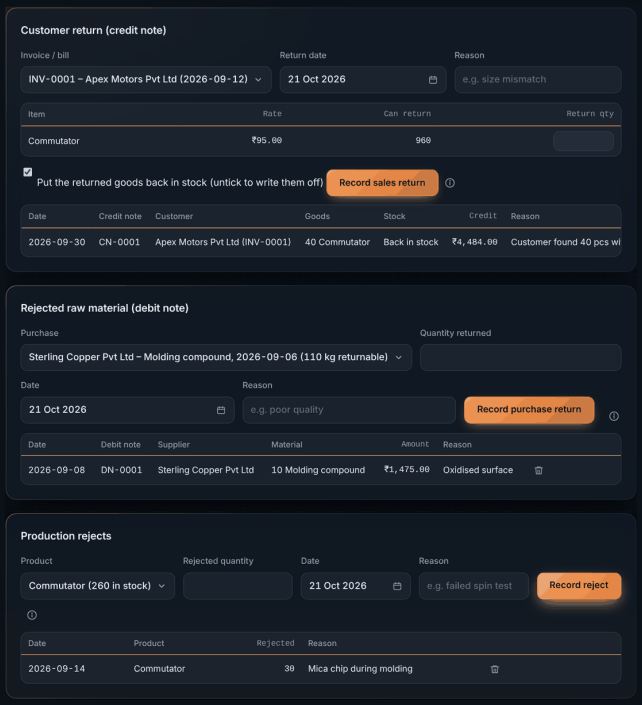


Test steps

#	Do this	Expected result
1	Sales return: 10 pcs against INV-0003 (500 pcs at ₹95).	Credit note: 10 × 95 × 1.18 = ₹1,121. Apex's outstanding falls by ₹1,121. Commutator stock +10.
2	Try returning more than was sold on that invoice.	"Only N Commutator can be returned."
3	Leave the quantity empty.	"Enter a quantity to return."
4	Purchase return: part of a purchase back to the supplier. Try more than was bought, or more than is in stock.	Valid return: debit note, payable and raw material stock fall. Too much: "Only N can be returned from this purchase." or "Only N … in stock."
5	Record a production reject of 5 commutators; then a number above current stock.	Stock −5; too many: "Only N Commutator in stock."
6	Open the invoice you returned against.	Credit note is listed; balance reflects it.


Ledgers

Balances for every account and downloadable statements for customers, suppliers and accounts.

All ledgers

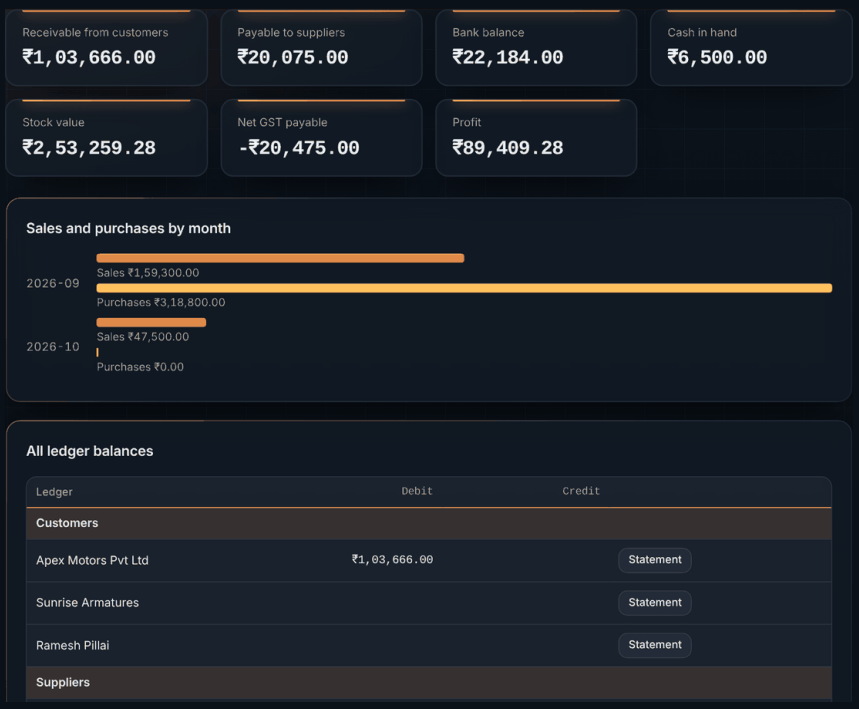


Ledger statement

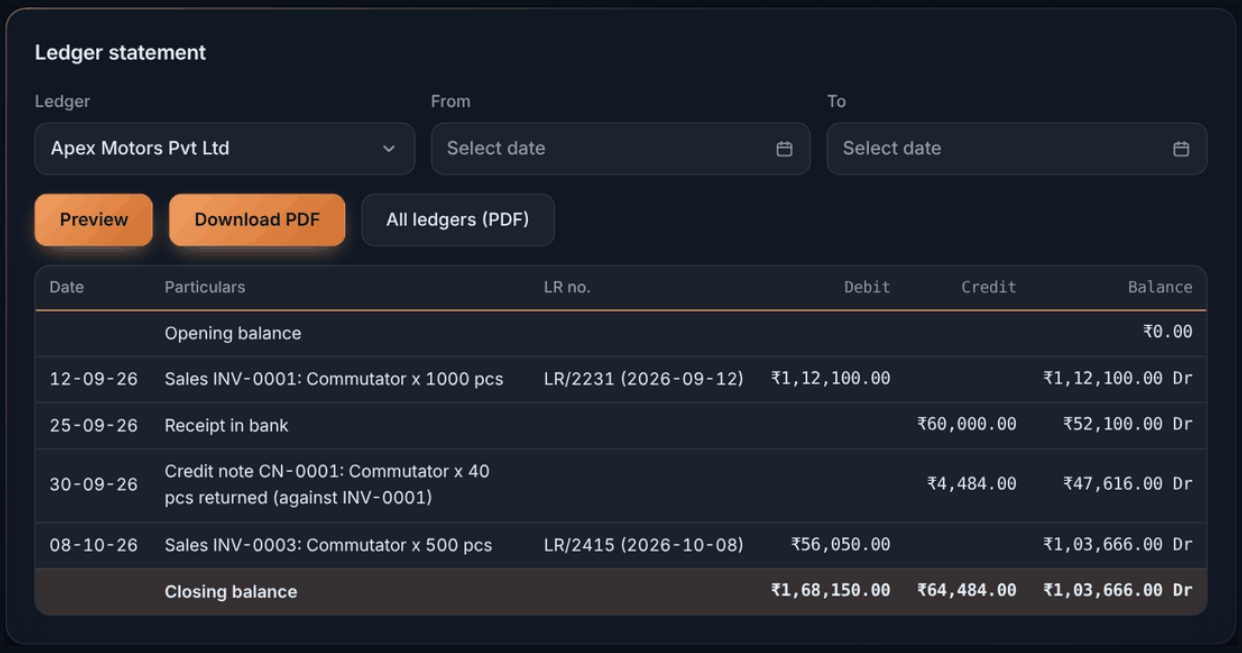

Date	Particulars	LR no.	Debit	Credit	Balance
	Opening balance				₹0.00
12-09-26	Sales INV-0001: Commutator x 1000 pcs	LR/2231 (2026-09-12)	₹1,12,100.00		₹1,12,100.00 Dr
25-09-26	Receipt in bank			₹60,000.00	₹52,100.00 Dr
30-09-26	Credit note CN-0001: Commutator x 40 pcs returned (against INV-0001)			₹4,484.00	₹47,616.00 Dr
08-10-26	Sales INV-0003: Commutator x 500 pcs	LR/2415 (2026-10-08)	₹56,050.00		₹1,03,666.00 Dr
	Closing balance		**₹1,68,150.00**	**₹64,484.00**	**₹1,03,666.00 Dr**

Statement preview

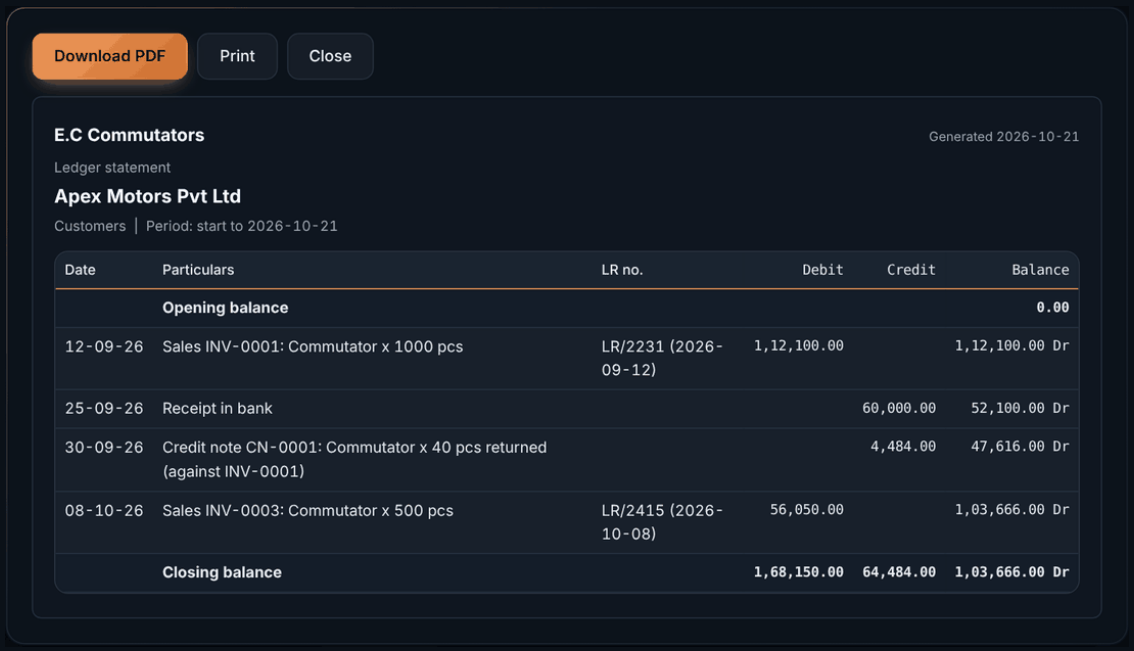


Test steps

#	Do this	Expected result
1	Choose Apex Motors Pvt Ltd.	Statement rows: INV-0001, receipt, credit note CN-0001, INV-0003; closing balance equals the customer’s outstanding.
2	Set From and To dates.	Only entries in range; opening balance carries earlier entries.
3	Press Preview.	Printable statement with LR numbers and totals (Debit, Credit, Balance).
4	Press Download PDF and All ledgers (PDF).	PDF downloads and opens; columns are not cut off.
5	Compare closing balance with the Customers page.	Same figure.


Reports

Live reports: charts, profit and loss, balance sheet, trial balance, daybook and GST summary.


Charts

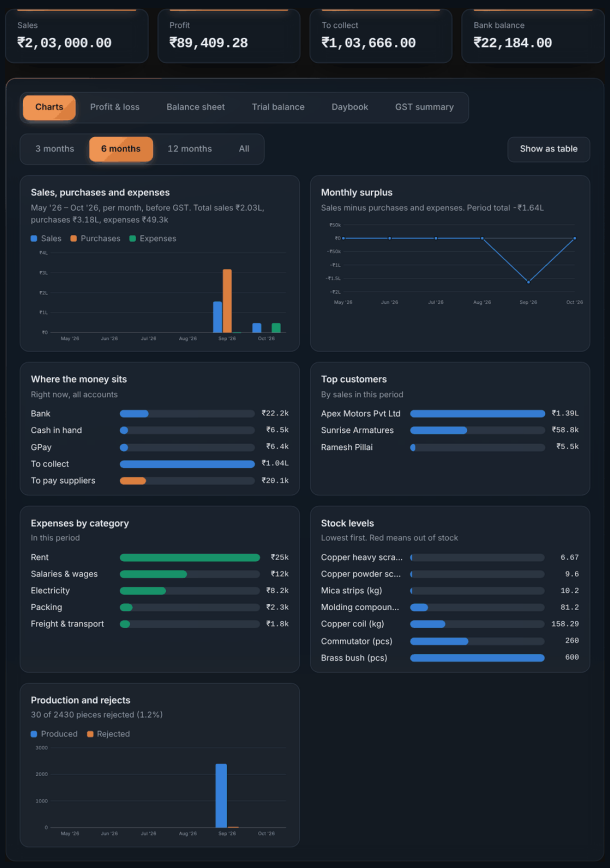

Profit and loss

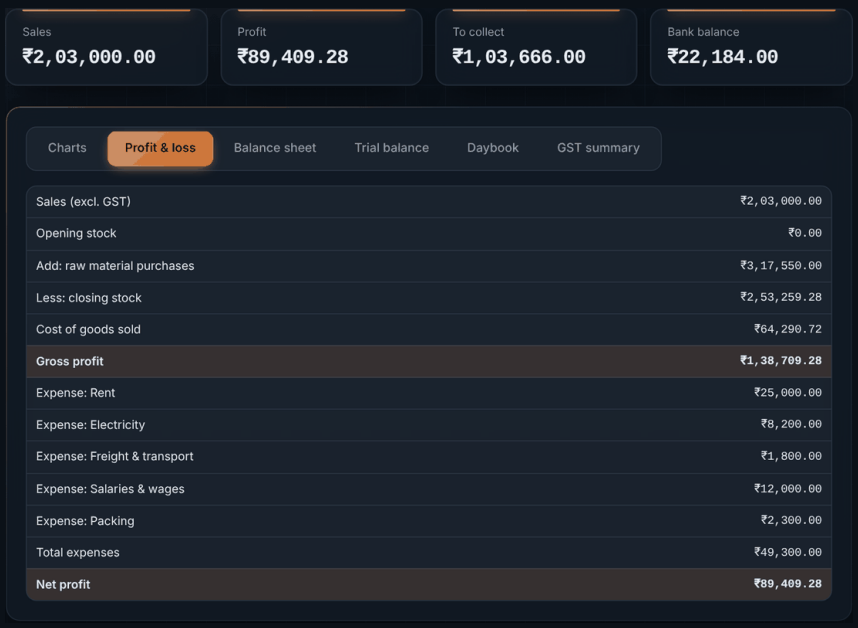


Balance sheet

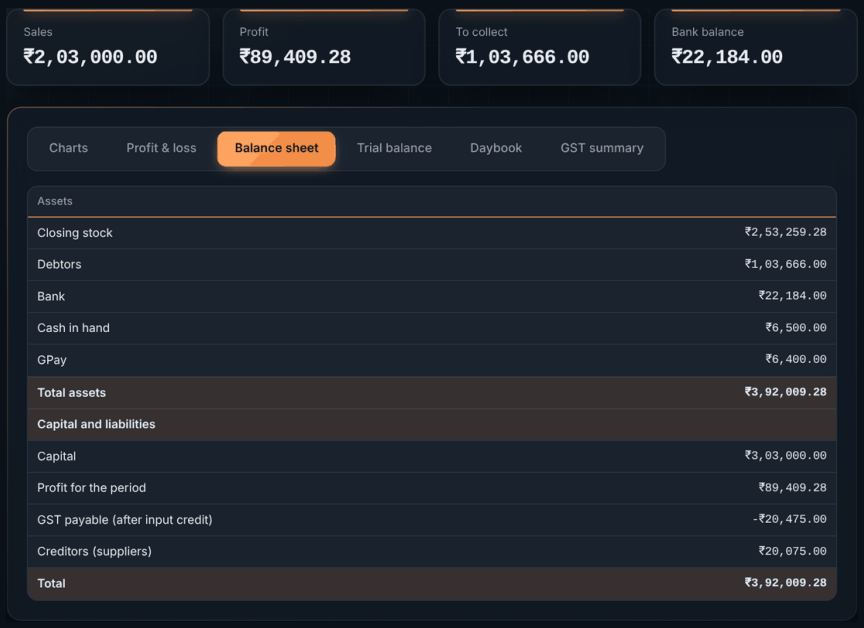


Assets	
Closing stock	₹2,53,259.28
Debtors	₹1,03,666.00
Bank	₹22,184.00
Cash in hand	₹6,500.00
GPay	₹6,400.00
Total assets	**₹3,92,009.28**
Capital and liabilities	
Capital	₹3,03,000.00
Profit for the period	₹89,409.28
GST payable (after input credit)	-₹20,475.00
Creditors (suppliers)	₹20,075.00
Total	**₹3,92,009.28**

Trial balance

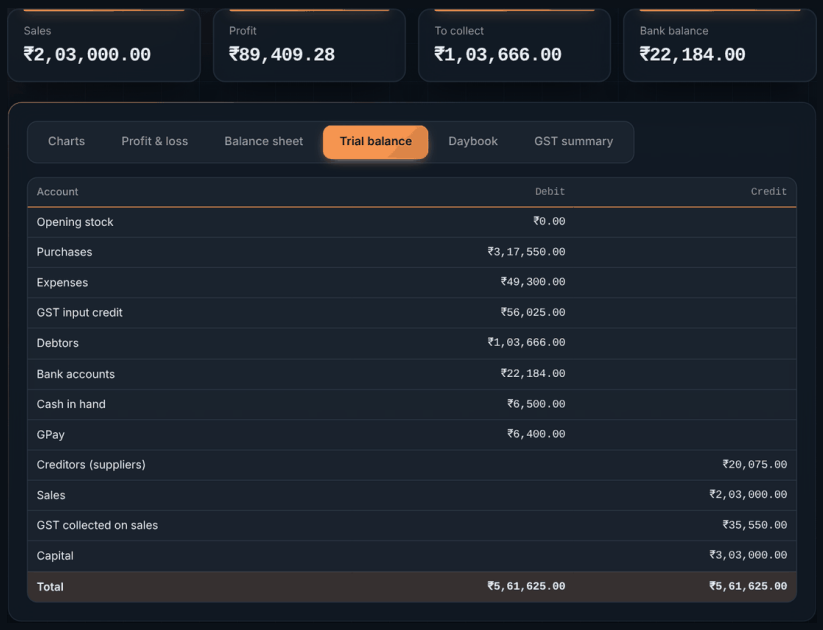


Account	Debit	Credit
Opening stock	₹0.00	
Purchases	₹3,17,550.00	
Expenses	₹49,300.00	
GST input credit	₹56,025.00	
Debtors	₹1,03,666.00	
Bank accounts	₹22,184.00	
Cash in hand	₹6,500.00	
GPay	₹6,400.00	
Creditors (suppliers)		₹20,075.00
Sales		₹2,03,000.00
GST collected on sales		₹35,550.00
Capital		₹3,03,000.00
Total	**₹5,61,625.00**	**₹5,61,625.00**

Daybook

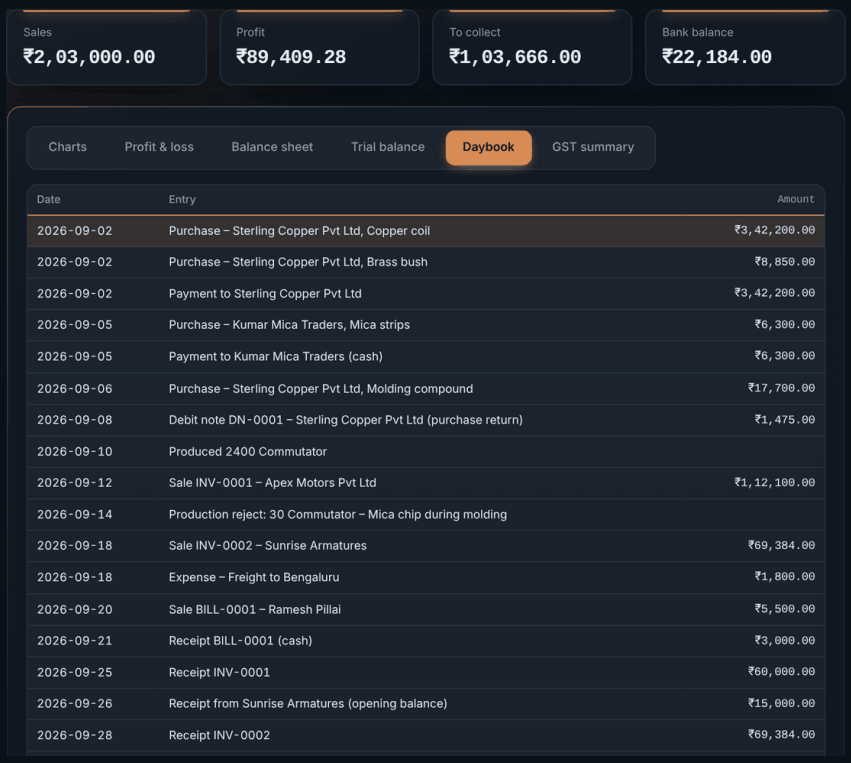

GST summary

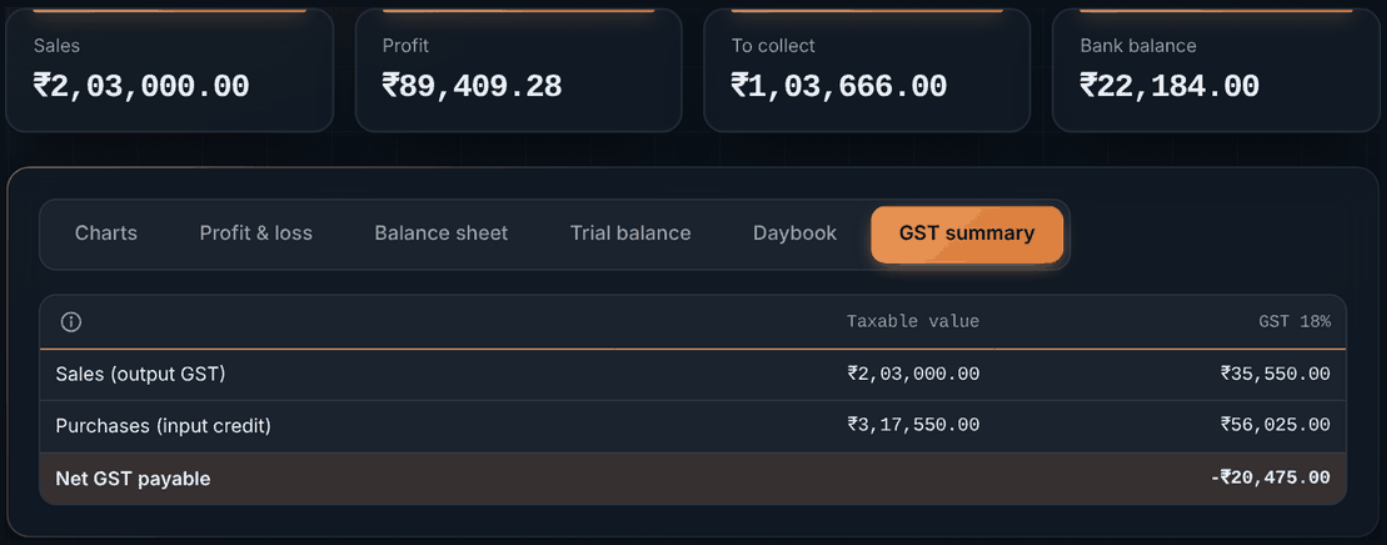

Test steps

#	Do this	Expected result
1	Open each tab with fresh sample data.	Sales ₹2,03,000; profit ₹89,409.28; to collect ₹1,03,666; bank ₹22,184; GST output ₹35,550, input ₹56,025.
2	After other testers enter data, reopen Profit and loss.	Sales, expenses and profit move by what they entered.
3	Check the balance sheet.	Both sides equal.
4	Check the trial balance.	Debit total equals credit total.
5	Open the daybook.	Every entry in date order, matching what testers saved.

#	Do this	Expected result
6	Open GST summary.	Output tax from invoices, input tax from purchases and expenses, net payable/credit shown.
7	Read the charts at phone width.	Charts fit the screen; labels readable.

Also try

• Ask the other testers to enter something and confirm it shows here within a few seconds.

Reporting a problem

For each issue, write one row. Add a screenshot and send the list to the owner.

Module	Step #	What you did	Expected	What happened

Also report anything confusing, slow, misspelled or hard to read on a phone.