

Main board rev 2.1 - front (Pi side): every SMD part and the THT bodies

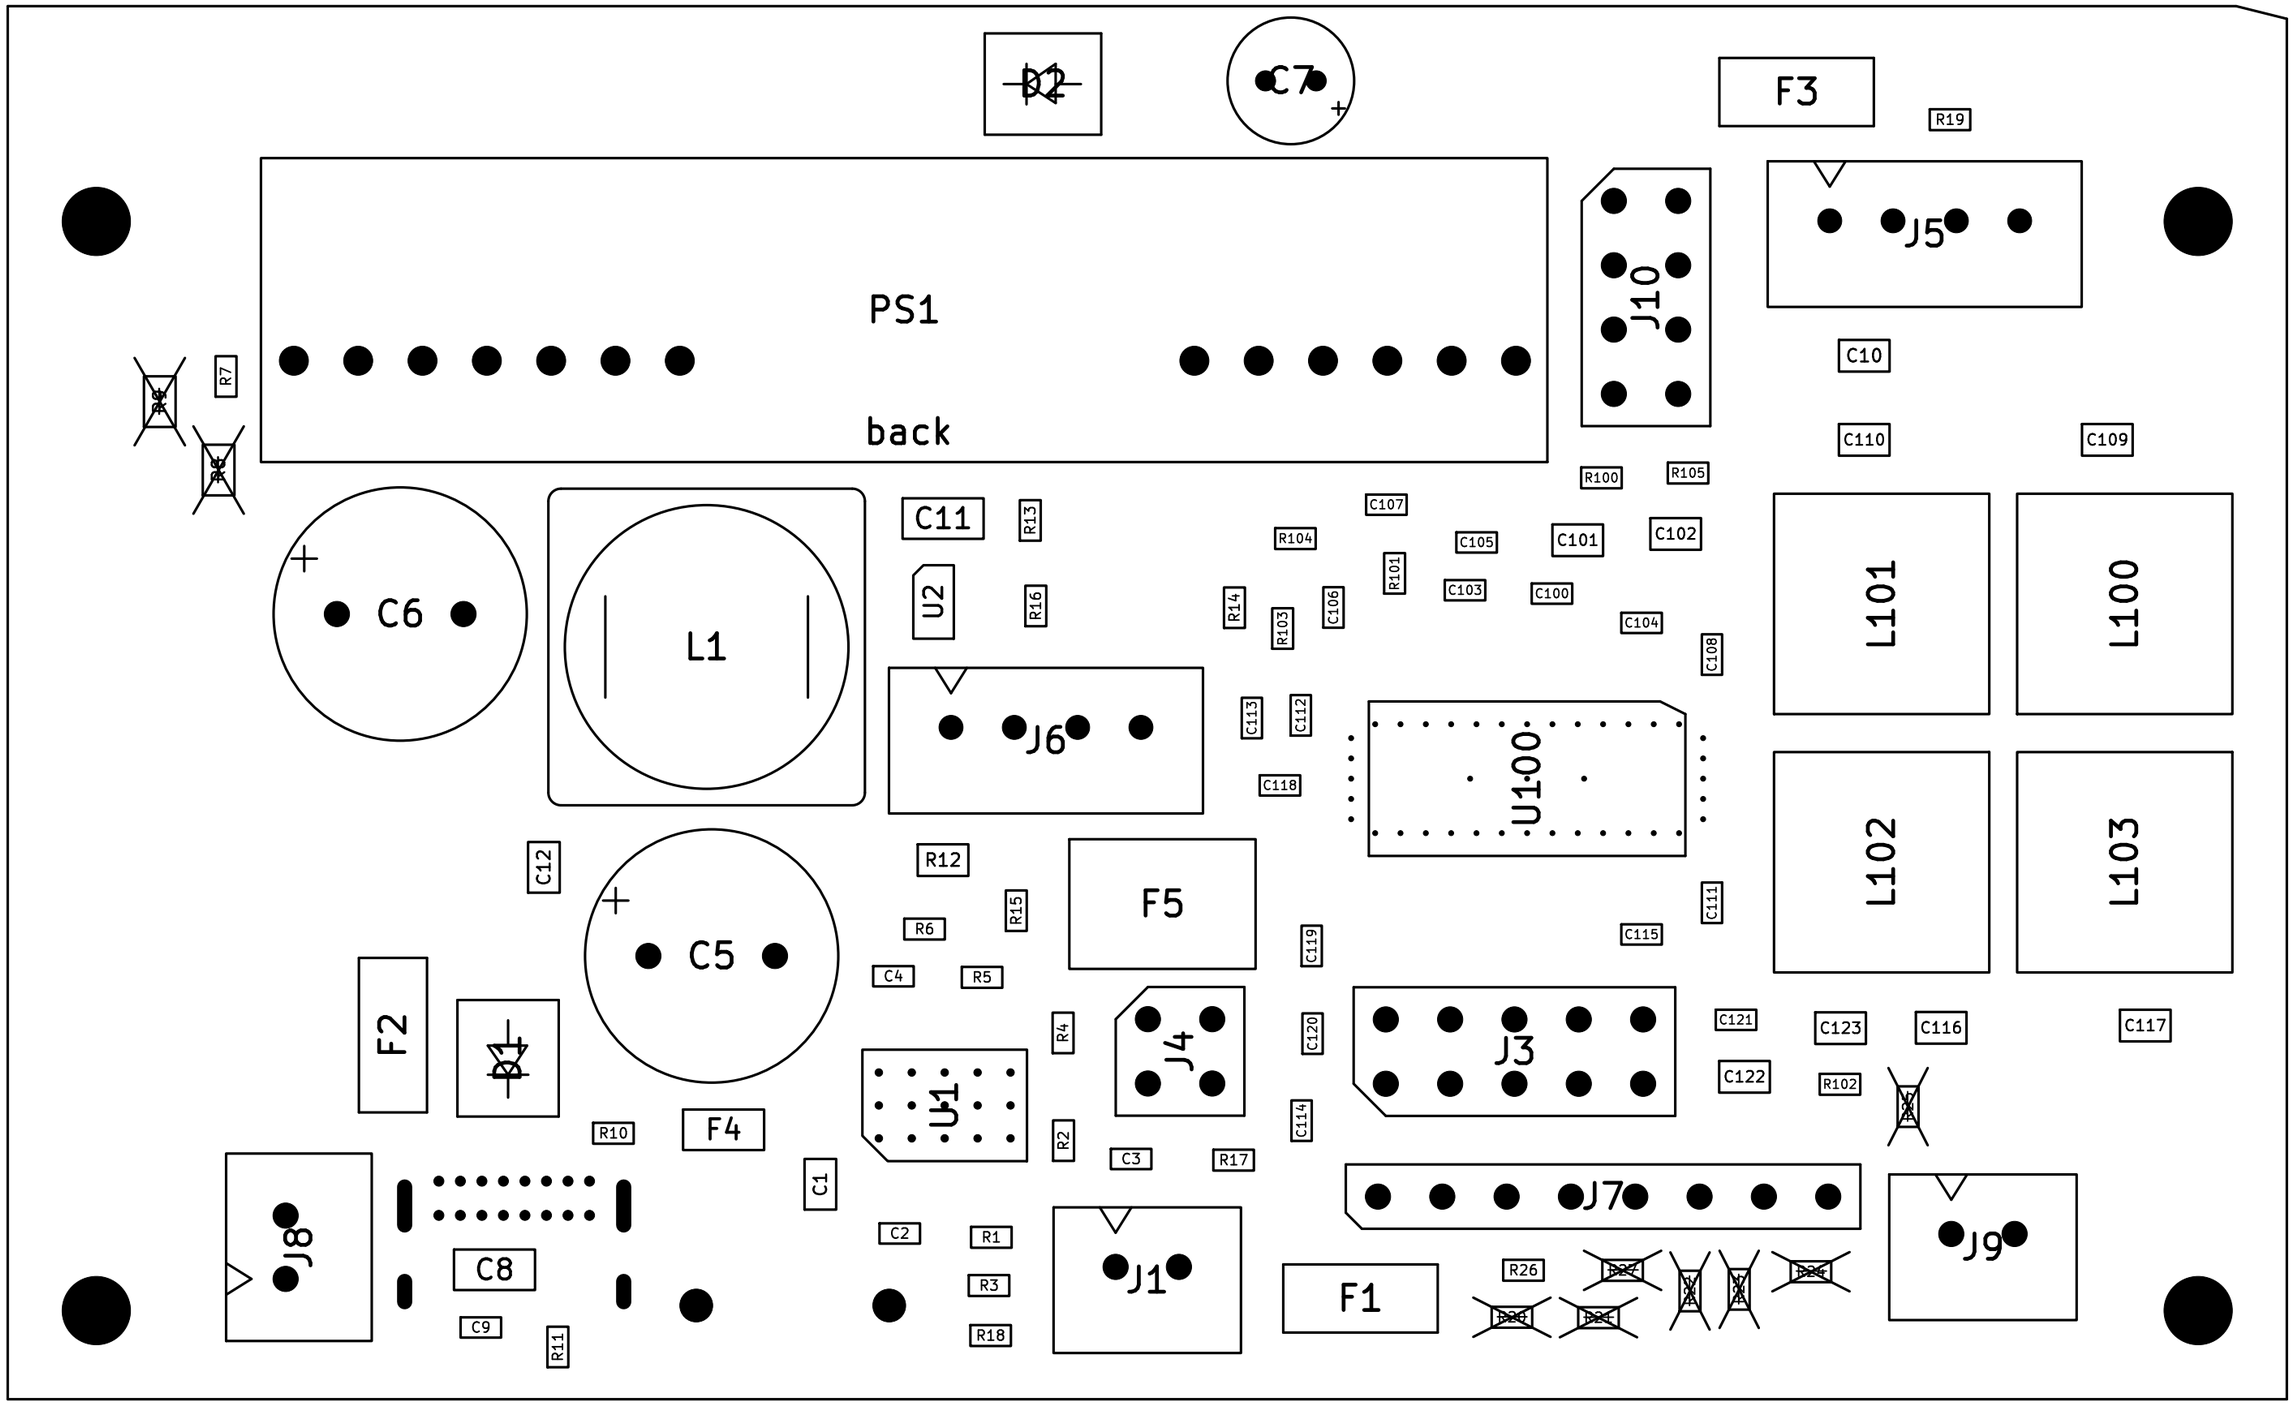

DNP, crossed out: R8, R9 (V20 trim), R20-R25 (D4a links; topology A), R27 (amp logic from the Pi 3V3).
Fitted options: R26 (amp logic from the board LDO), R7 (NID enable from the eFuse PGOOD), R14-R16 0 R (I2S series).
Polarity: D1 SMBJ22A, D2 SMBJ6.0A-E (band = cathode); C5, C6, C7 (+); ICs: pin 1 at the chamfered corner.
THT, fitted from this side and soldered on the back after the hotplate: J1, J5, J6, J8, J9 (XH), J10 (2x4 header), C5, C6, C7, PS1.
J3, J4: holes for the GPIO lead wires (no part). J7: empty in topology A. PVDD: probe F5 pin 2 here (bench only).

Main board rev 2.1 - back (door side), seen from the back

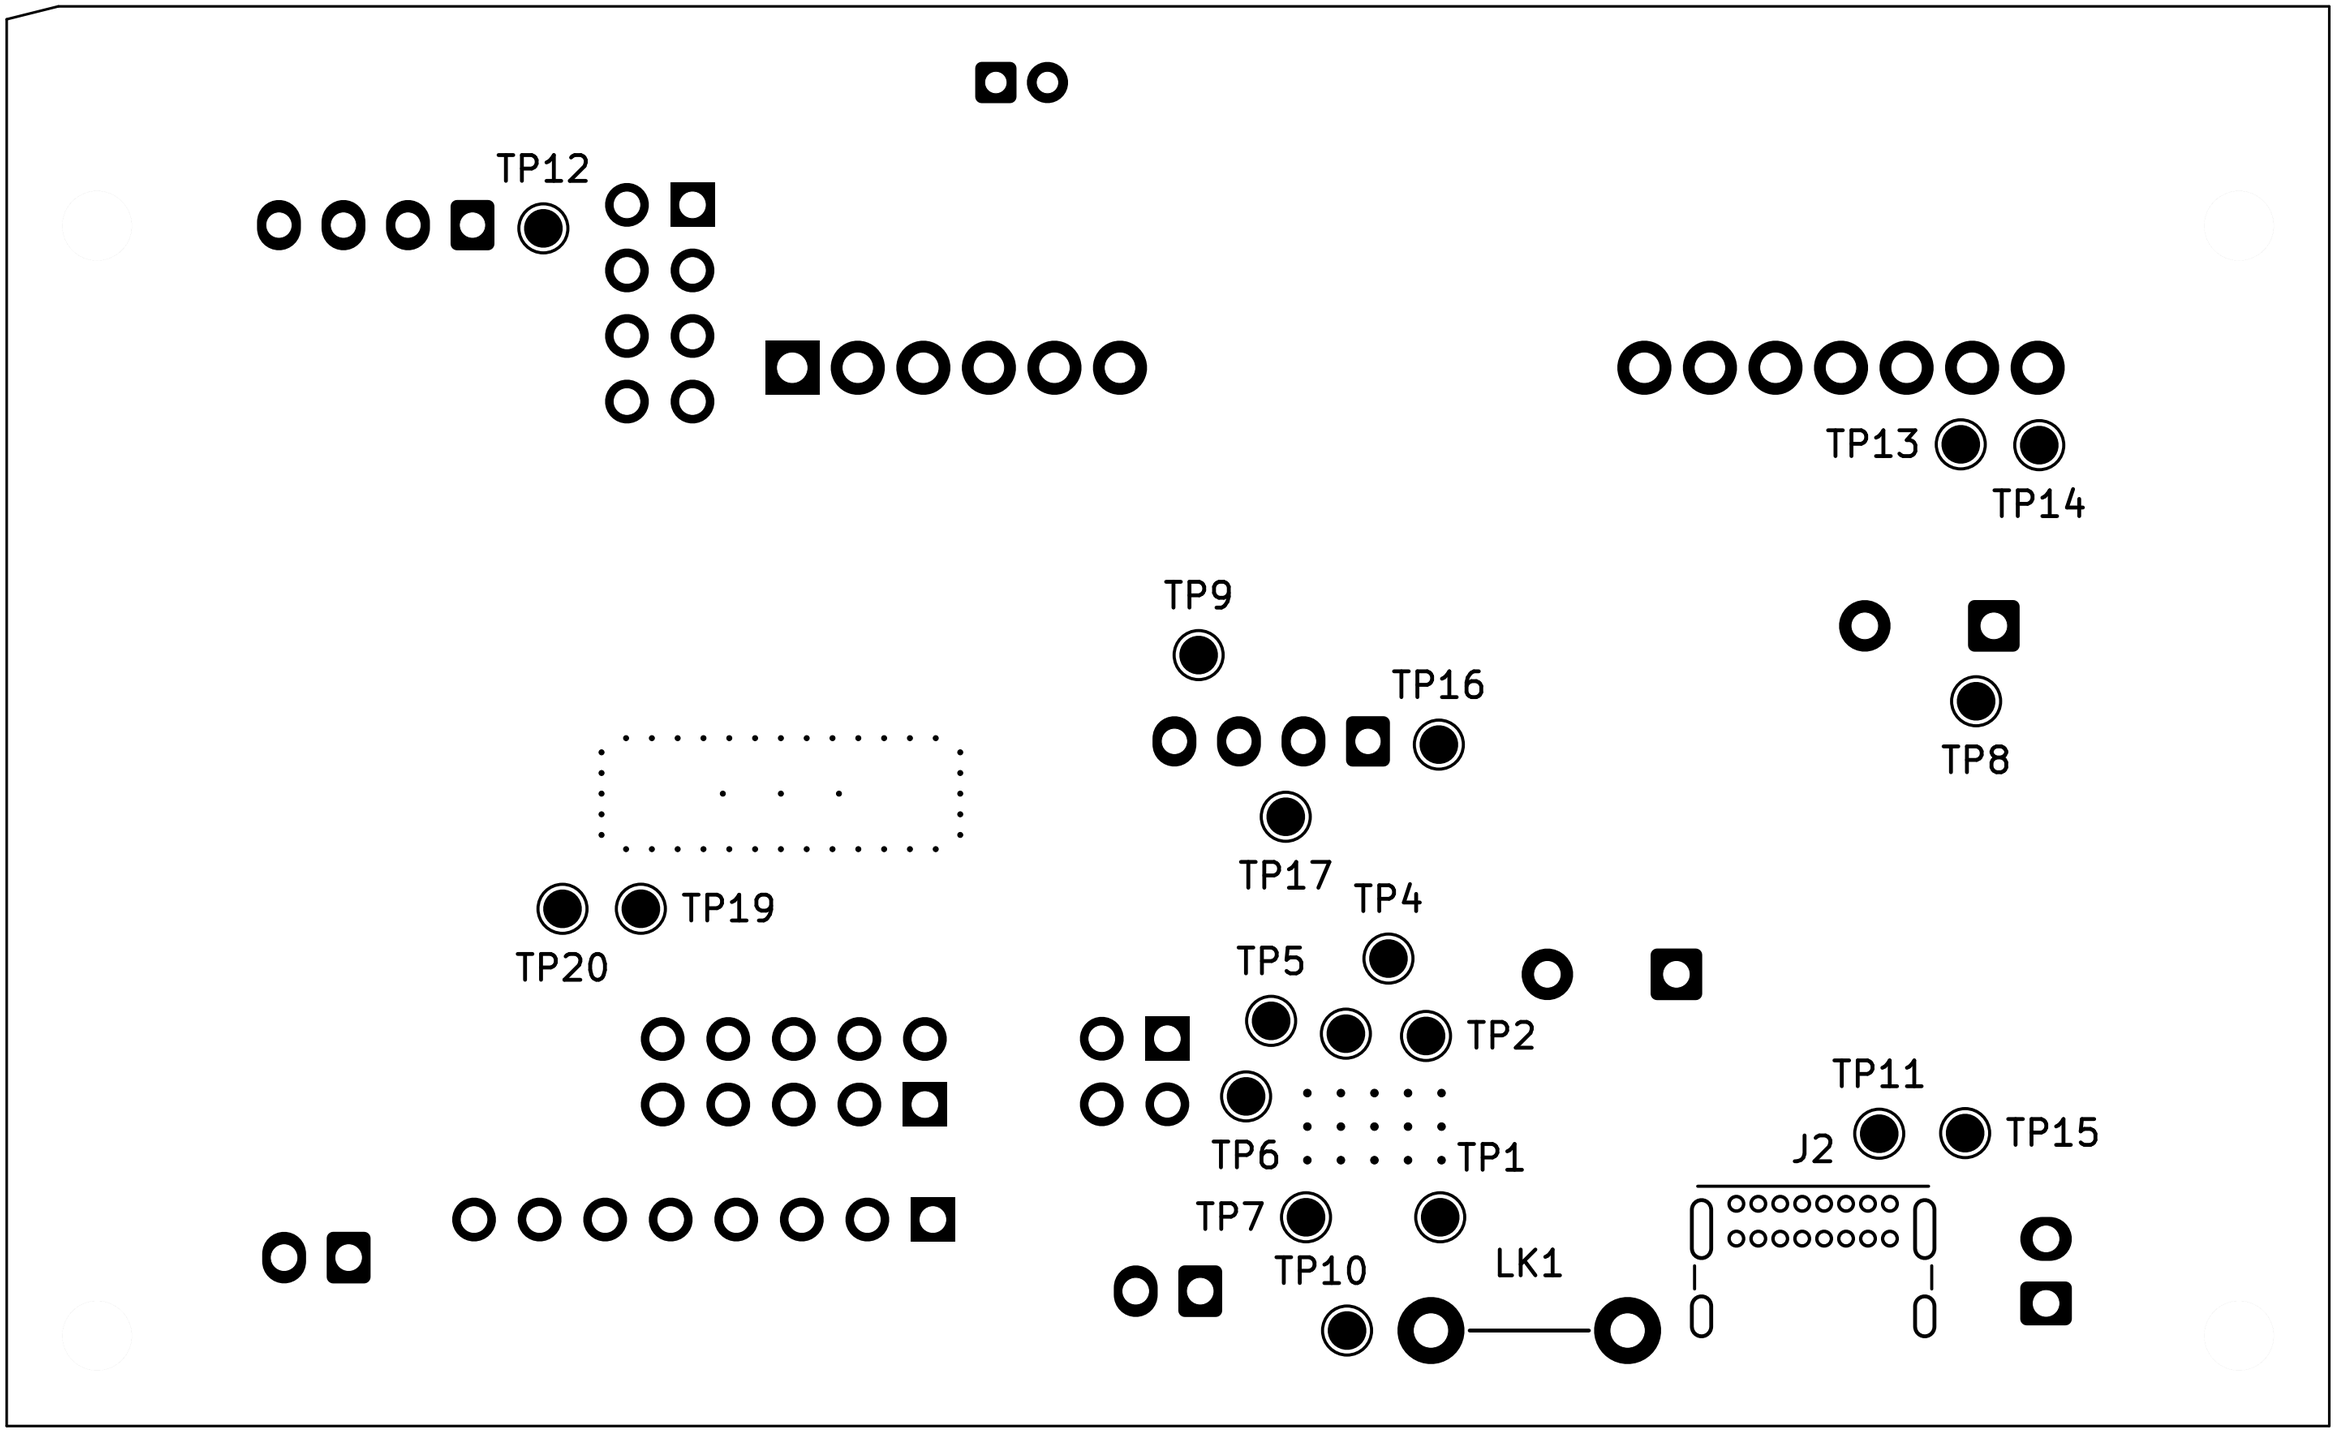

J2 (USB4085) and LK1 (1.0 mm tinned wire) are fitted from this side and soldered on the front: fit them before the tall front parts.
Black = exposed copper on this side: the THT joints and the bare test pads TP1-TP20 (no TP18); nothing to fit on the pads.
Ground returns: TP7, TP15, TP17, TP20.