Tran Quang Lam

TRƯỜNG ĐẠI HỌC
SƯ PHẠM KỸ THUẬT TP. HỒ CHÍ MINH
HCMC University of Technology and Education
HCMUTE

THE EXAM PERFORMANCE PROGRAM

INFORMATION TECHNOLOGY CENTER

Call Us: (+84 - 8) 38968641 - (+84 - 8) 38961333 Email: ic@hcmute.edu.vn

Started on Monday, 5 June 2017, 1:11 PM
State Finished
Completed on Monday, 5 June 2017, 2:20 PM
Time taken 1 hour 9 mins

Question 1
Complete
Marked out of 1.00

The following sequence of instructions are executed. What is the correct value of flag bits at watch point?

```
MOV DL,FF
MOV AL,F6
IMUL DL
```

watch point:

OF = [redacted]

CF = [redacted]

studeersnel
messages.pdf_cover_qr_code_label
messages.downloaded_by

Question 2

Complete

Marked out of 0.50

In multiplication instruction, when thesourceoperandis 16 bit, how can the result be taken?

Select one:

- from DX:AX pair
- from EAX
- from AX:DX pair
- from AX

Question 3

Not answered

Marked out of 1.20

Consider the following assembly instruction sequence

```
        CMP DL, 0
        JB    x_label
        CMP DL, 9
        JA    a_label
        ADD DL, 30h
        JMP x_label
a_label:
        CMP DL, 0Fh
        JA    x_label
        ADD DL, 37h
x_label:
        MOV AL, DL
watch point:
...
```

Choose correct value of AL register at watch point for different value of DL?

DL=10 [redacted]

DL=8 [redacted]

DL=55h [redacted]

DL=0FFh [redacted]

studeersnel

messages.pdf_cover_qr_code_label
messages.downloaded_by

Question 4

Complete

Marked out of 1.20

Hereafter is instruction sequence to compute thesum of 8 bytes starting at memory address 200. Two lines of code are possibly missing. Choose correct one to fill in?

```
01:             _____________; possibly missing code
02:             MOV AL, 0
03:             MOV CX, 8
04: Loop_label:
05:             _____________; possibly missing code
06:             ADD AX, [SI];
07:             INC SI
08:             LOOP Loop_label
```

01: [redacted]

05: [redacted]

Question 5

Complete

Marked out of 0.50

In multiplication instruction, when the source operand is 8 bit, _____ will be multiplied with source.

Select one:

- AX
- BX
- AL
- Whatever general purpose register

Question 6

Complete

Marked out of 1.00

Which are valid based index addressing?

Select one or more:

- [BX+DI]
- [DX+SI]
- [SP+DI]
- [BX+SI]

studeersnel


messages.pdf_cover_qr_code_label
messages.downloaded_by

Question 7

Not answered

Marked out of 1.20

Given a flowchart of an algorithm:

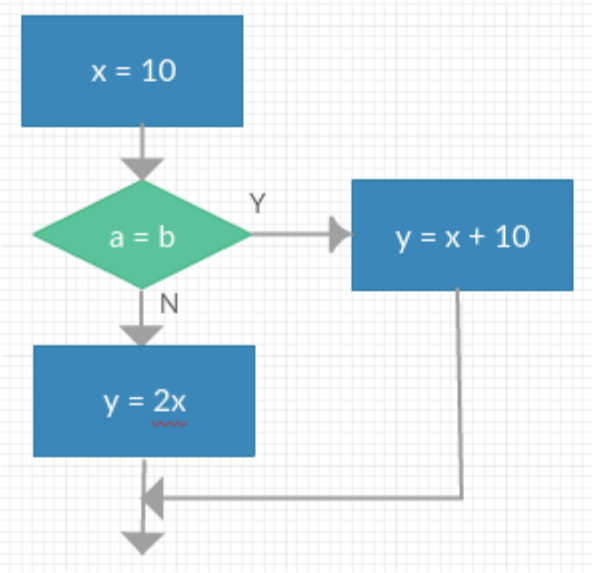

Select the correct instruction sequence:

Select one or more:

-
```
mov dl,10
cmp al,bl
jnz n_label
add dl,10
jmp e_label
n_label:
mov cl,1
shl dl,cl
e_label:
mov dh,dl
```

-
```
mov dl,10
cmp al,bl
jz n_label
mov cl,1
shl dl,cl
jmp e_label
n_label:
add dl,10
e_label:
mov dh,dl
```

-
```
mov dl,10
cmp al,bl
jnz n_label
add dl,10
jmp e_label
n_label:
mov cl,1
shr dl,cl
e_label:
mov dh,dl
```

studeersnel
messages.pdf_cover_qr_code_label
messages.downloaded_by

```
mov dl,10
cmp al,bl
jnz n_label
add dl,10
mov dh,dl
jmp e_label
n_label:
mov cl,1
shl dl,cl
e_label:
mov dh,dl
```

Question 8

Complete

Marked out of 1.00

Part of computer memory is shown in figure

Address	1D48	1D49	1D4A	1D4B	1D4C	1D4D	1D4E	1D4F
Value	03	7F	F5	2D	5A	12	7B	C0

What is the value of AX register after instruction MOV AX, [1D4B] executed

Answer: 2D

Question 9

Complete

Marked out of 1.00

The following sequence of instructions are executed. What is the correct value of AX, CX, DX at watch point?

```
MOV AX,0020
MOV CX,0010
MUL CL
```

watch point:

AX = [redacted]

DX [redacted]

CX = [redacted]

studeersnel

messages.pdf_cover_qr_code_label
messages.downloaded_by

Question 10

Complete

Marked out of 1.00

Which set of registers are valid for addressingastackmemory location?

Select one or more:

- [ ] DS:SI
- [x] SS:SP
- [x] SS:BP
- [ ] SS:BX

Question 11

Complete

Marked out of 1.00

In computer, how does the processor serve multiple interrupt request from devices?

Select one:

- Each device are assigned an interrupt priority, the device with lower priority will be served.
- Device with higher priority will use interrupt enable flag
- Each device are assigned an interrupt priority, the device with higher priority will be served.
- The processor can not process multiple interrupt requests

Question 12

Complete

Marked out of 1.00

Givenarow of memory image in debug

0AE8:0120 13 96 D0 E0 D0 E0 A2 1E - 99 80 3E 20 99 00 75 24

Initially,AX=BX=CX=DX=0, SI=128

Whatarevalue of AX,DX after execution of the following instructions?

```
MOV EDX, [SI]
MOV EAX, [SI+4]
```

AX = [redacted]

DX = [redacted]

studeersnel

messages.pdf_cover_qr_code_label
messages.downloaded_by

Question 13

Complete

Marked out of 1.00

Basic functions that a computer canperformincluding:

Select one or more:

- [x] Data movement
- [x] Control
- [ ] Interrupt
- [x] Data processing
- [x] Data storage
- [ ] Direct memory access

Question 14

Complete

Marked out of 1.00

The following sequence of instructions are executed. What is the correct value of flag bits at watch point?

```
MOV AX,FFFF
MOV CX,5
MUL CX
```

watch point:

Overflow flag (OF) = [redacted]

Carry flag (CF) = [redacted]

studeersnel

messages.pdf_cover_qr_code_label
messages.downloaded_by

Question 15

Not answered

Marked out of 1.20

Given a code snippet:

```
int n = 10;
do {
    n--;
} while (n > 0);
```

Which ones are the equivalent logic sequence of instructions in Assembly

Select one or more:

-
```
mov cx, 10
a_label:
    dec cx
    cmp cx, 0 jz
    e_label  jmp
    a_label
e_label:
```
-
```
mov cx, 10
a_label:
    .....
    loop a_label
```
-
```
mov cx, 10
a_label:
    .....
    dec cx
    cmp cx,0
    jz a_label
```
-
```
mov cx, 10
a_label:
    .....
    dec cx
    loop a_label
```

Question 16

Not answered

Marked out of 1.20

Write mask byte (in hex) to clear bit 2nd, 3rd, 5th of a byte value with AND instruction (LSB is 1st bit).

Answer:

studeersnel

messages.pdf_cover_qr_code_label
messages.downloaded_by

Question 17

Complete

Marked out of 1.00

the memory stack area of a program showninfigure

Address	1D50	1D51	1D52	1D53
Value	AF	90	71	DA

The value of SP register is 1D50. What is the valueof SP follows the execution of PUSH SI

Answer: 90

Question 18

Complete

Marked out of 0.50

To clear one or more bits in a byte value, use _____ instruction.

Select one:

- AND
- XOR
- OR
- NOT

Question 19

Complete

Marked out of 0.50

The instruction, MOV AX, 0005h belongs to which addressing mode?

Select one:

- register
- direct
- index
- Immediate

Question 20

Complete

Marked out of 1.00

Which are correct about the data registers of IA-32 processors:

Select one or more:

- Lower halves of the 16-registers an be used as 8-bit data registers: AH,AL,BH,BL,CH,CL,DH,DL
- Lower halves of the 32-registers an be used as 4 16-bit data registers: AX,BX,CX,DX
- Higher halves of the 32-bit registers can be used as 16-bit registers: EAH,EAL,EBH,EBL,ECH,ECL,EDH,EDL
- complete 32-bit registers: EAX, EBX, ECX, EDX

studeersnel

messages.pdf_cover_qr_code_label
messages.downloaded_by

Question 21

Not answered

Marked out of 1.00

What are components of Von Neumann,namelyIAScomputer?

Select one or more:

- [ ] Monitor
- [ ] Memory
- [ ] I/O Equipments
- [ ] Punched card reader
- [ ] Bus
- [ ] CPU

Question 22

Complete

Marked out of 1.00

The following sequence of instructions are executed. What is the correct value of flag bits at watch point?

```
MOV AL,-5
SUB AL,124
```

watch point:

Overflow flag (OF) = [redacted]

Carry flag (CF) = [redacted]

Zero flag (OF) = [redacted]

Sign flag (SF) [redacted]

Question 23

Complete

Marked out of 1.00

Enter debug command to fill 256 bytes in data segment starting from 100 with value 0D

Answer: F 100 1FF 0D

studeersnel

messages.pdf_cover_qr_code_label
messages.downloaded_by

Question 24

Not answered

Marked out of 0.50

Which are correct action for STOSBstringoperationifDF is reset (=0)

Select one or more:

- decrease DI by 1
- Store 8-bit value from AL into memory location pointed by ES:[DI]
- increase DI by 1
- Store 8-bit value from AL into memory location pointed by DS:[SI]

Question 25

Complete

Marked out of 1.00

For better speed, in CPU design, engineers make use of the following techniques:

Select one or more:

- Pipelining
- Branch prediction
- Faster CPU internal bus
- Speculative execution

Question 26

Complete

Marked out of 1.00

The following sequence of instructions are executed. What is the correct value of CF and OF at watch point?

```
MOV AX,FFF6h
MOV CX,1000h
IMUL CX
```

watch point:

CF= [redacted]

OF= [redacted]

Question 27

Complete

Marked out of 0.50

Which are correct action for SCASW string operation if DF is set (=1)

Select one or more:

- decrease DI by 2
- compare value in AL register with memory location pointed by ES:[DI]
- compare value in AL register with memory location pointed by DS:[SI]
- increase DI by 2

studeersnel

messages.pdf_cover_qr_code_label

messages.downloaded_by

Question 28

Complete

Marked out of 1.00

Given a row of memory image in debug

0AE8:0120 13 96 D0 E0 D0 E0 A2 1E - 99 80 3E 20 99 00 75 24

SI = 120, DI = 128

Select correct sequence of instructions to subtract words at [DI] from [SI] then store the result at memory location 12A

Step 1: [redacted]

Step 2: [redacted]

Step 3: [redacted]

Step 4: [redacted]

Question 29

Complete

Marked out of 1.00

Selectcorrectmatch for register values at watch points:

MOV AX, 4FCA

ADD AX, DDA9

watch point #1:

ADD AH, F3

watch point #2:

.....

watch point #2: [redacted]

watch point #1: [redacted]

Question 30

Complete

Marked out of 1.00

Compute the physical address of the next instruction will be execute if instruction pointer is 091D and code segment located at 1FAF

Answer: 2040D

studeersnel

messages.pdf_cover_qr_code_label

messages.downloaded_by

Question 31

Complete

Marked out of 1.00

Choose correct features for SRAM andDRAM

DRAM [redacted]

SRAM [redacted]

Question 32

Complete

Marked out of 1.20

Convert the 32-bit floating point number 44363800 (in hex) to decimal.

Answer: 1144403968

Question 33

Complete

Marked out of 1.00

The following sequence of instructions are executed. What is the correct value of flag bits at watch point?

```
MOV AL, 80
MOV BL, 2
MUL BL
```

watch point:

Overflow flag (OF) = [redacted]

Carry flag (CF) = [redacted]

Question 34

Complete

Marked out of 0.50

Which could be correct ones for the destination operand in a data movement instruction?

Select one or more:

- [ ] memory location
- [x] all choices are correct
- [ ] immediate data
- [ ] register

studeersnel

messages.pdf_cover_qr_code_label
messages.downloaded_by

Question 35

Complete

Marked out of 1.00

The following sequence of instructionsareexecuted.What is the correct value of flag bits at watch point?

MOV AL, 0F

ADD AL, F1

watch point:

Carry flag (CF) = [redacted]

Zero flag (OF) = [redacted]

Question 36

Complete

Marked out of 1.00

Memory dump at 1D20:0200 as below:

1D20:0200 00 20 10 5D 55 47 00 90 - 00 10 20 30 40 50 60 70

Given value of registers: DS = 1D20, SI = 200, BX = 202, AX = 0103

Identify correct value of AX register after XLAT instruction is executed.

AL = [redacted]

AH = [redacted]

studeersnel

messages.pdf_cover_qr_code_label

messages.downloaded_by

Question 37

Not answered

Marked out of 1.20

Given a code snippet (ax, bx are nonenegativeintegers):

```
if (ax >= bx)
   ax -=bx;
else
   bx -=ax;
```

What is the equivalent logic sequence of instructions in Assembly

Select one:

-
```
cmp ax,bx
 jnbe a_label
 sub ax,bx
 jmp x_label
a_label:
 sub bx,ax
x_label:
```

-
```
cmp ax,bx
 jb a_label
 sub ax,bx
 jmp x_label
a_label:
 sub bx,ax
x_label:
```

-
```
cmp ax,bx
 jbe a_label
 sub ax,bx
 jmp x_label
a_label:
 sub bx,ax
x_label:
```

-
```
cmp ax,bx
 ja a_label
 sub ax,bx
 jmp x_label
a_label:
 sub bx,ax
x_label:
```

studeersnel

messages.pdf_cover_qr_code_label
messages.downloaded_by

Question 38

Complete

Marked out of 0.50

Which of the following instructions arenotvalid?

Select one or more:

- [ ] MOV AX, SI
- [x] MOV AX, [BP+2]
- [ ] MOV SP, SS:[SI+2]
- [x] MOV DS, B800h

Question 39

Complete

Marked out of 0.50

if the location to which the control is to be transferred lies in a segment other than the current one, then the jump instruction is call

Select one:

- (•) intrasegment direct mode
- ( ) intersegment mode
- ( ) intrasegment mode
- ( ) intrasegment indirect mode

Question 40

Complete

Marked out of 0.50

The instruction that supports addition when carry exists is

Select one:

- ( ) ADD
- (•) ADC
- ( ) DAS
- ( ) SBB

Question 41

Not answered

Marked out of 1.20

Convert 0.1015625 to IEEE 32-bit floating point format (1 sign+ 8 exponent + 23 mantissa)

Answer:

studeersnel

messages.pdf_cover_qr_code_label
messages.downloaded_by

Question 42

Complete

Marked out of 0.50

The instruction that is used for findingoutthecodesin case of code conversion problems is

Select one:

- JCXZ
- XCHG
- XLAT
- XOR

Question 43

Complete

Marked out of 1.00

Which statements are correct for HDDs?

Select one or more:

- Head, Track, Cylinder are key parameters for access data on hard disk
- Head, Track, Sector are key parameters for access data on hard disk
- Bits are stored on tracks
- Bits are store randomly on disk surfaces

Question 44

Complete

Marked out of 0.50

Which are correct action for LODSB string operation if DF is reset (=0)

Select one or more:

- increase SI by 1
- Load 8-bit value at memory location pointed by ES:[DI] into AL
- decrease DI by 1
- Load 8-bit value at memory location pointed by DS:[SI] into AL

Question 45

Complete

Marked out of 0.50

To test one bit in a byte value without destructing the byte, use _____ instruction.

Select one:

- AND
- TEST
- NOT
- OR

studeersnel

messages.pdf_cover_qr_code_label
messages.downloaded_by