TRƯỜNG ĐẠI HỌC
SƯ PHẠM KỸ THUẬT TP. HỒ CHÍ MINH
HCMC University of Technology and Education
HCMUTE

HỆ THỐNG THI TRẮC NGHIỆM TRỰC TUYẾN

TRUNG TÂM CÔNG NGHỆ THÔNG TIN

Call Us: (+84 - 8) 38968641 - (+84 - 8) 38961333 Email: ic@hcmute.edu.vn

Bắt đầu vào lúc	Thứ hai, 5 Tháng sáu 2017, 1:11 PM
State	Finished
Kết thúc lúc	Thứ hai, 5 Tháng sáu 2017, 2:21 PM
Thời gian thực hiện	1 giờ 10 phút

Câu hỏi 1

Hoàn thành

Đạt điểm 0,50

Which could be correct ones for the destination operand in a data movement instruction?

Select one or more:

- [x] all choices are correct
- [ ] memory location
- [ ] register
- [ ] immediate data

Câu hỏi 2

Hoàn thành

Đạt điểm 1,00

Choose correct features for SRAM and DRAM

SRAM	Faster access time, cost more per bit, smaller size
DRAM	Slower access time, cheaper cost per bit, can manufacture with larger size

studeersnel

messages.pdf_cover_qr_code_label
messages.downloaded_by

Câu hỏi

Hoàn thà

Đạt điểm 0

3

nh

0,5

Which are correct action for LODSB string operation if DF is reset (=0)

Select one or more:

- [x] Load 8-bit value at memory location pointed by DS:[SI] into AL
- [ ] Load 8-bit value at memory location pointed by ES:[DI] into AL
- [ ] increase SI by 1
- [ ] decrease DI by 1

Câu hỏi 4

Hoàn thành

Đạt điểm 1,00

Enter debug command to fill 256 bytes in data segment starting from 100 with value 0D

Answer: f 100 100 0d

Câu hỏi 5

Hoàn thành

Đạt điểm 0,50

To clear one or more bits in a byte value, use _____ instruction.

Select one:

- OR
- AND
- NOT
- XOR

Câu hỏi 6

Hoàn thành

Đạt điểm 1,00

The following sequence of instructions are executed. What is the correct value of flag bits at watch point?

```
MOV AL, 80
MOV BL, 2
MUL  BL
```

watch point:

Carry flag (CF) = set

Overflow flag (OF) = reset

Câu hỏi 7

Hoàn thà

Đạt điểm

For better speed, in CPU design, engineers make use of the following techniques:

Select one or more:

- [x] Branch prediction

studeersnel

messages.pdf_cover_qr_code_label

messages.downloaded_by

Câu hỏi

Hoàn thà

Đạt điểm 0

8

nh

0,5

The instruction that supports addition when carry exists is

Select one:

- DAS
- ADC
- SBB
- ADD

Câu hỏi 9

Hoàn thành

Đạt điểm 1,00

The following sequence of instructions are executed. What is the correct value of flag bits at watch point?

```
MOV AL,-5
SUB  AL,124
```

watch point:

Overflow flag (OF) = set

Zero flag (OF) = reset

Carry flag (CF) = reset

Sign flag (SF) set

Câu hỏi 10

Hoàn thành

Đạt điểm 1,00

The following sequence of instructions are executed. What is the correct value of flag bits at watch point?

```
MOV AL, 0F
ADD AL, F1
```

watch point:

Carry flag (CF) = set

Zero flag (OF) = set

Câu hỏi 11

Hoàn th nh

Đạt điểm 1,20

Convert the 32-bit floating point number 44363800 (in hex) to decimal.

Answer: 7.115032207x10^-34

studeersnel

messages.pdf_cover_qr_code_label

messages.downloaded_by

Câu hỏi

Hoàn thà

Đạt điểm 0

12

nh

0,5

Which of the following instructions are not valid?

Select one or more:

- [x] MOV SP, SS:[SI+2]
- [ ] MOV AX, [BP+2]
- [x] MOV DS, B800h
- [ ] MOV AX, SI

Câu hỏi 13

Hoàn thành

Đạt điểm 0,50

In multiplication instruction, when the source operand is 8 bit, _____ will be multiplied with source.

Select one:

- AX
- BX
- AL
- Whatever general purpose register

Câu hỏi 14

Hoàn thành

Đạt điểm 1,00

Part of computer memory is shown in figure

Address	1D48	1D49	1D4A	1D4B	1D4C	1D4D	1D4E	1D4F
Value	03	7F	F5	2D	5A	12	7B	C0

What is the value of AX register after instruction **MOV AX, [1D4B]** executed

Answer: 5A2D

Câu hỏi 15

Hoàn thành

Đạt điểm 0,50

To test one bit in a byte value without destructing the byte, use _____ instruction.

Select one:

- TEST
- NOT
- OR
- AND

studeersnel


messages.pdf_cover_qr_code_label
messages.downloaded_by

Câu hỏi 16

Hoàn thành

Đạt điểm 1,20

Given a flowchart of an algorithm:

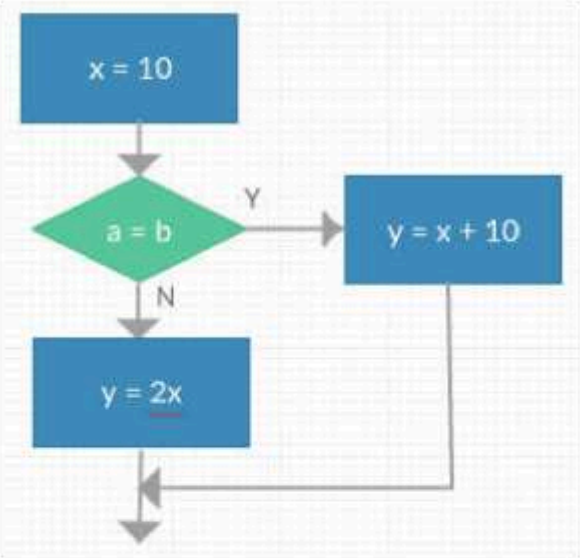

Select the correct instruction sequence:

Select one or more:

- mov dl,10
  cmp al,bl
  jnz n_label
  add dl,10
  jmp e_label
  n_label:
  mov cl,1
  shr dl,cl
  e_label:
  mov dh,dl
- mov dl,10
  cmp al,bl
  jz n_label
  mov cl,1
  shl dl,cl
  jmp e_label
  n_label:
  add dl,10
  e_label:
  mov dh,dl
- mov dl,10
  cmp al,bl
  jnz n_label
  add dl,10
  mov dh,dl
  jmp e_label
  n_label:
  shl dl,cl
  e_label:

studeersnel

messages.pdf_cover_qr_code_label
messages.downloaded_by

```
        add dl,10
        jmp e_label
    n_label:
        mov cl,1
        shl dl,cl
    e_label:
        mov dh,dl
```

Câu hỏi 17

Hoàn thành

Đạt điểm 1,00

Which are valid based index addressing?

Select one or more:

- [x] [BX+SI]
- [x] [BX+DI]
- [ ] [SP+DI]
- [x] [DX+SI]

Câu hỏi 18

Hoàn thành

Đạt điểm 1,00

Given a row of memory image in debug

0AE8:0120 13 96 D0 E0 D0 E0 A2 1E - 99 80 3E 20 99 00 75 24

SI = 120, DI = 128

Select correct sequence of instructions to subtract words at [DI] from [SI] then store the result at memory location 12A

Step 1: MOV AX, [SI]

Step 2: SUB AX, [DI]

Step 3: MOV BX, 012A

Step 4: MOV [BX], AX

Câu hỏi 19

Hoàn thành

Đạt điểm 1,00

Which statements are correct for HDDs?

Select one or more:

- [ ] Bits are store randomly on disk surfaces
- [x] Head, Track, Sector are key parameters for access data on hard disk
- [x] Bits are stored on tracks
- [ ] Head, Track, Cylinder are key parameters for access data on hard disk

studeersnel

messages.pdf_cover_qr_code_label
messages.downloaded_by



Câu hỏi 2

Hoàn thàn

Đạt điểm 1 0

0

h

,0

Which set of registers are valid for addressing a stack memory location?

Select one or more:

- [ ] DS:SI
- [x] SS:BP
- [ ] SS:SP
- [x] SS:BX

Câu hỏi 21

Hoàn thành

Đạt điểm 1,20

Given a code snippet:

```
int n = 10;
do {
    n--;
} while (n > 0);
```

Which ones are the equivalent logic sequence of instructions in Assembly

Select one or more:

- [x]
```
    mov cx, 10
a_label:
     dec cx
    cmp cx, 0
    jz e_label
    jmp a_label
e_label:
```
- [ ]
```
 mov cx, 10
a_label:
  .....
  dec cx
  loop  a_label
```
- [ ]
```
 mov cx, 10
a_label:
  .....
  dec cx
  cmp cx,0
  jz  a_label
```
- [x]
```
 mov cx, 10
a_label:
  .....
  loop  a_label
```

studeersnel

messages.pdf_cover_qr_code_label

messages.downloaded_by



Câu hỏi 2

Hoàn thàn

Đạt điểm 1 0

2

h

,0

Select correct match for register values at watch points:

MOV AX, 4FCA

ADD AX, DDA9

watch point #1:

ADD AH, F3

watch point #2:

.....

watch point #1: AL = 73

watch point #2: AH = 20

Câu hỏi 23

Hoàn thành

Đạt điểm 1,00

The following sequence of instructions are executed. What is the correct value of flag bits at watch point?

MOV AX,FFFF

MOV CX,5

MUL CX

watch point:

Overflow flag (OF) = set

Carry flag (CF) = set

Câu hỏi 24

Hoàn thành

Đạt điểm 0,50

The instruction, MOV AX, 0005h belongs to which addressing mode?

Select one:

- register
- direct
- Immediate
- index

studeersnel

messages.pdf_cover_qr_code_label

messages.downloaded_by

Câu hỏi 2

Hoàn thàn

Đạt điểm 1 0

5

h

,0

In computer, how does the processor serve multiple interrupt request from devices?

Select one:

- Each device are assigned an interrupt priority, the device with lower priority will be served.
- Device with higher priority will use interrupt enable flag
- The processor can not process multiple interrupt requests
- Each device are assigned an interrupt priority, the device with higher priority will be served.

Câu hỏi 26

Hoàn thành

Đạt điểm 1,00

Compute the physical address of the next instruction will be execute if instruction pointer is 091D and code segment located at 1FAF

Answer: 2040D

Câu hỏi 27

Hoàn thành

Đạt điểm 0,50

Which are correct action for SCASW string operation if DF is set (=1)

Select one or more:

- [x] decrease DI by 2
- [ ] compare value in AL register with memory location pointed by DS:[SI]
- [ ] increase DI by 2
- [x] compare value in AL register with memory location pointed by ES:[DI]

studeersnel

messages.pdf_cover_qr_code_label
messages.downloaded_by



Câu hỏi 2

Hoàn thàn

Đạt điểm 1 0

8

h

,2

Consider the following assembly instruction sequence

```
        CMP DL, 0
        JB   x_label
        CMP DL, 9
        JA   a_label
        ADD DL, 30h
        JMP  x_label
a_label:
        CMP DL, 0Fh
        JA   x_label
        ADD DL, 37h
x_label:
        MOV AL, DL
```

watch point:

...

Choose correct value of AL register at watch point for different value of DL?

DL=8 38h ▾

DL=10 41h ▾

DL=55h 55h ▾

DL=0FFh 0FFh ▾

Câu hỏi 29

Hoàn thành

Đạt điểm 1,00

The following sequence of instructions are executed. What is the correct value of AX, CX, DX at watch point?

```
        MOV AX,0020
        MOV CX,0010
        MUL  CL
```

watch point:

AX = 0200 ▾

CX = 0010 ▾

DX 0000 ▾

studeersnel

messages.pdf_cover_qr_code_label
messages.downloaded_by



Câu hỏi 3

Hoàn thàn

Đạt điểm 1 0

0

h

,2

Write mask byte (in hex) to clear bit 2nd, 3rd, 5th of a byte value with AND instruction (LSB is 1st bit).

Answer: E9

Câu hỏi 31

Hoàn thành

Đạt điểm 1,00

the memory stack area of a program shown in figure

Address	1D50	1D51	1D52	1D53
Value	AF	90	71	DA

The value of SP register is 1D50. What is the value of SP follows the execution of **PUSH SI**

Answer: 1D4E

Câu hỏi 32

Hoàn thành

Đạt điểm 0,50

In multiplication instruction, when the source operand is 16 bit, how can the result be taken?

Select one:

- from DX:AX pair
- from EAX
- from AX:DX pair
- from AX

studeersnel

messages.pdf_cover_qr_code_label
messages.downloaded_by

Câu hỏi 33

Hoàn thành

Đạt điểm 1,20

Given a code snippet (ax, bx are none negative integers):

```
if (ax >= bx)
   ax -=bx;
else
   bx -=ax;
```

What is the equivalent logic sequence of instructions in Assembly

Select one:

-
```
cmp ax,bx
jnbe  a_label
sub ax,bx
jmp x_label
a_label:
sub bx,ax
x_label:
```

-
```
cmp ax,bx
jb  a_label
sub ax,bx
jmp x_label
a_label:
sub bx,ax
x_label:
```

-
```
cmp ax,bx
ja  a_label
sub ax,bx
jmp x_label
a_label:
sub bx,ax
x_label:
```

-
```
cmp ax,bx
jbe  a_label
sub ax,bx
jmp x_label
a_label:
sub bx,ax
x_label:
```

studeersnel

messages.pdf_cover_qr_code_label
messages.downloaded_by

Câu hỏi 3

Hoàn thàn

Đạt điểm 1 0

4

h

,0

Given a row of memory image in debug

0AE8:0120 13 96 D0 E0 D0 E0 A2 1E - 99 80 3E 20 99 00 75 24

Initially, AX=BX=CX=DX=0, SI=128

What are value of AX,DX after execution of the following instructions?

MOV EDX, [SI]

MOV EAX, [SI+4]

DX = 8099

AX = 0099

Câu hỏi 35

Hoàn thành

Đạt điểm 1,00

Basic functions that a computer can perform including:

Select one or more:

- [ ] Interrupt
- [x] Data movement
- [ ] Direct memory access
- [x] Data processing
- [x] Control
- [x] Data storage

Câu hỏi 36

Hoàn thành

Đạt điểm 1,00

What are components of Von Neumann, namely IAS computer?

Select one or more:

- [ ] Monitor
- [x] Bus
- [x] CPU
- [x] Memory
- [x] I/O Equipments
- [ ] Punched card reader

studeersnel

messages.pdf_cover_qr_code_label
messages.downloaded_by

Câu hỏi 3

Hoàn thàn

Đạt điểm 1 0

7

h

,0

Which are correct about the data registers of IA-32 processors:

Select one or more:

- [x] complete 32-bit registers: EAX, EBX, ECX, EDX
- [ ] Higher halves of the 32-bit registers can be used as 16-bit registers: EAH,EAL,EBH,EBL,ECH,ECL,EDH,EDL
- [x] Lower halves of the 32-registers an be used as 4 16-bit data registers: AX,BX,CX,DX
- [x] Lower halves of the 16-registers an be used as 8-bit data registers: AH,AL,BH,BL,CH,CL,DH,DL

Câu hỏi 38

Hoàn thành

Đạt điểm 1,00

Memory dump at 1D20:0200 as below:

1D20:0200 00 20 10 5D 55 47 00 90 - 00 10 20 30 40 50 60 70

Given value of registers: DS = 1D20, SI = 200, BX = 202, AX = 0103

Identify correct value of AX register after XLAT instruction is executed.

AH = 5Dh ▾

AL = 10h ▾

Câu hỏi 39

Hoàn thành

Đạt điểm 1,20

Hereafter is instruction sequence to compute the sum of 8 bytes starting at memory address 200. Two lines of code are possibly missing. Choose correct one to fill in?

```
01:             _____; possibly missing code
02:             MOV AL, 0
03:             MOV CX, 8
04: Loop_label:
05:             _____; possibly missing code
06:             ADD AX, [SI];
07:             INC SI
08:             LOOP Loop_label
```

05: CBW ▾

01: MOV SI, 200 ▾

studeersnel

messages.pdf_cover_qr_code_label
messages.downloaded_by



Câu hỏi

Hoàn thà

Đạt điểm 0

40

nh

0,5

if the location to which the control is to be transferred lies in a segment other than the current one, then the jump instruction is call

Select one:

- intrasegment indirect mode
- intrasegment direct mode
- intersegment mode
- intrasegment mode

Câu hỏi 41

Hoàn thành

Đạt điểm 1,00

The following sequence of instructions are executed. What is the correct value of flag bits at watch point?

```
MOV DL,FF
MOV AL,F6
IMUL  DL
```

watch point:

OF = set

CF = set

Câu hỏi 42

Hoàn thành

Đạt điểm 0,50

Which are correct action for STOSB string operation if DF is reset (=0)

Select one or more:

- Store 8-bit value from AL into memory location pointed by DS:[SI]
- decrease DI by 1
- increase DI by 1
- Store 8-bit value from AL into memory location pointed by ES:[DI]

Câu hỏi 43

Hoàn thành

Đạt điểm 0,50

The instruction that is used for finding out the codes in case of code conversion problems is

Select one:

- JCXZ
- XOR
- XLAT
- XCHG

studeersnel

messages.pdf_cover_qr_code_label
messages.downloaded_by

Câu hỏi

Hoàn thà

Đạt điểm 0

44

nh

1,2

Convert 0.1015625 to IEEE 32-bit floating point format (1 sign+ 8 exponent + 23 mantissa)

Answer: 3DD00000

Câu hỏi 45

Hoàn thành

Đạt điểm 1,00

The following sequence of instructions are executed. What is the correct value of CF and OF at watch point?

```
MOV AX,FFF6h
MOV CX,1000h
IMUL  CX
```

watch point:

CF= set

OF= set

VỀ CHÚNG TÔI

Trường Đại học Sư phạm Kỹ thuật TP HCM sẽ trở thành trung tâm đào tạo, nghiên cứu khoa học, đổi mới sáng tạo và khởi nghiệp hàng đầu Việt Nam, ngang tầm với các trường đại học uy tín trong khu vực và thế giới.

Read More »

THÔNG TIN

Tin tức - Sự kiện

Tuyển sinh

Thông báo

Học bổng- việc làm

studeersnel

messages.pdf_cover_qr_code_label

messages.downloaded_by