

Inputs

Button 1: Mode



Button 2: Set hour/min toggle

Button 3: Plus

Async Alarm

Hierarchy: alarm > mode > set > plus

State	Symbol	Display	Current	Next State Inputs (AMSP)			
				AMSP=1xxx	01xx	001x	0001
TIME	S ₀	HH:MM	S ₀	S ₇	S ₃	S ₁	X
SET-HR	S ₁	Hr blinking, min frozen	S ₁	S ₇	X	S ₂	Hr +1
SET-MIN	S ₂	Min blinking, hr frozen	S ₂	S ₇	X	S ₀	Min +1
STOPWATCH	S ₃	MM:SS	S ₃	S ₇	S ₄	start/stop	reset (if stopped)
ALARM-VIEW	S ₄	HH:MM	S ₄	S ₇	S ₀	S ₅	toggle on/off
ALARM-SET-HR	S ₅	Hr blinking, min frozen	S ₅	S ₇	X	S ₆	Hr +1
ALARM-SET-MIN	S ₆	Hr frozen, min blinking	S ₆	S ₇	X	S ₄	Min +1
ALARM-RING	S ₇	Hr/min blinks, buzzer on	S ₇	S ₇	S ₀	S ₀	S ₀

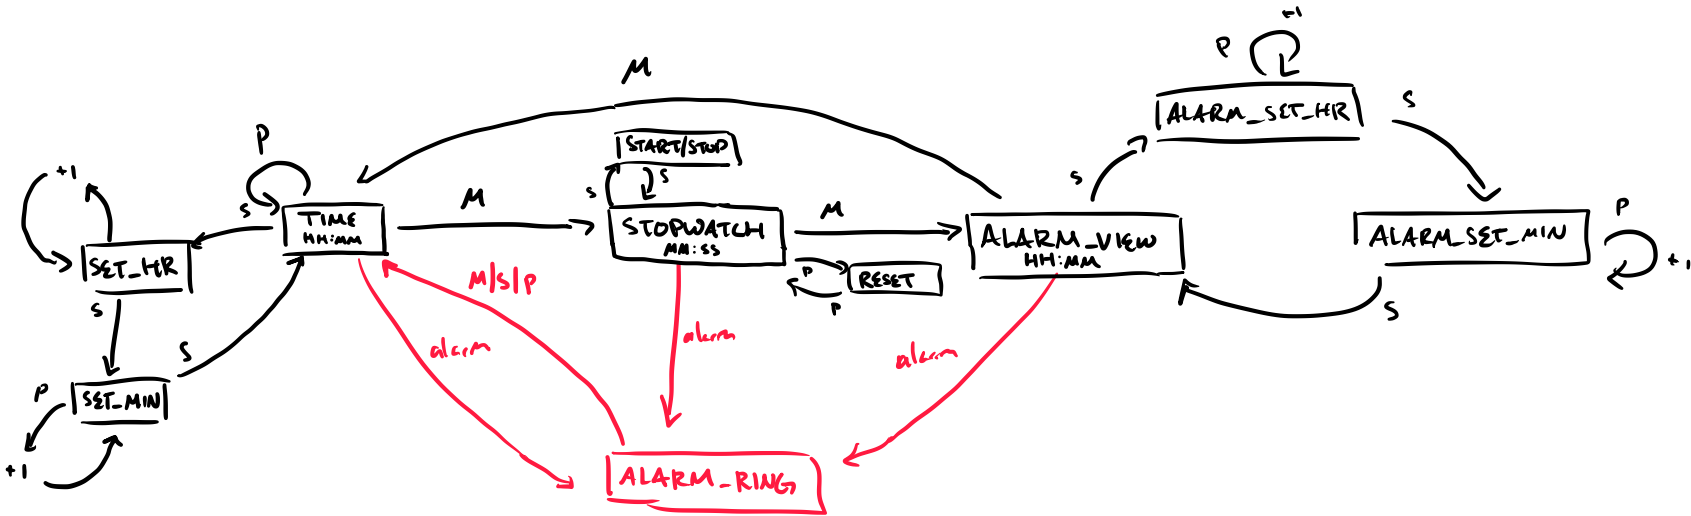

	a	b	c	d	e	f	g
0	1	1	1	1	1	1	0
1	0	1	1	0	0	0	0
2	1	1	0	1	1	0	1
3	1	1	1	1	0	0	1
4	0	1	1	0	0	1	1
5	1	0	1	1	0	1	1
6	1	0	1	1	1	1	1
7	1	1	1	0	0	0	0
8	1	1	1	1	1	1	1
9	1	1	1	0	0	1	1