


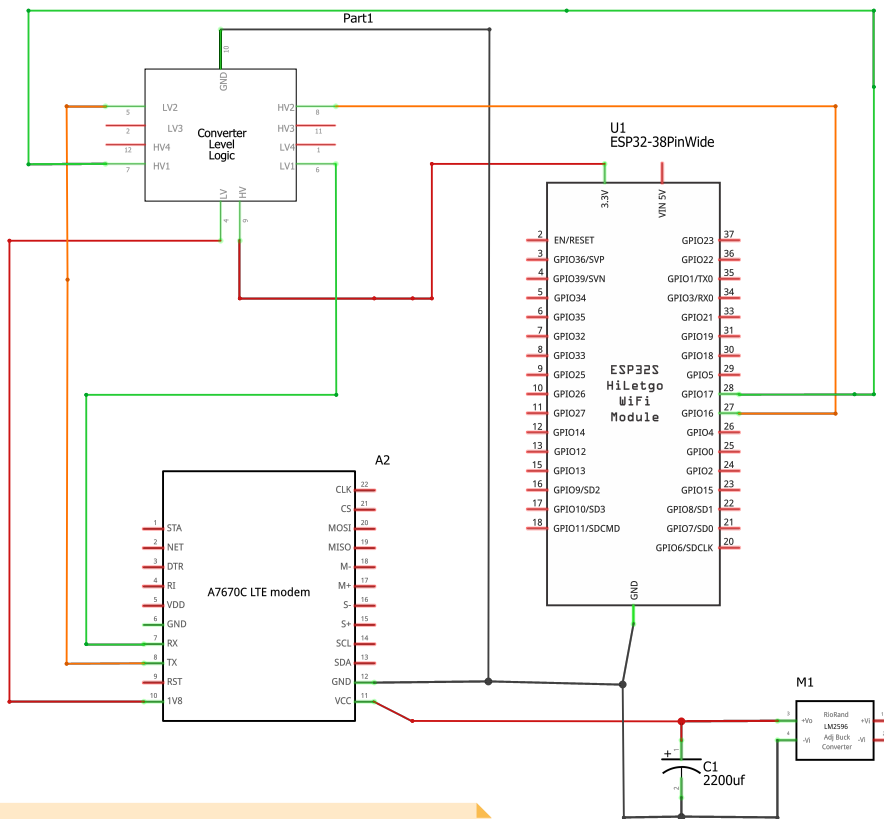

A7670C is a low voltage device
Do not power it with ESP 5V or 3.3V
Power it using LM2596 and Set its output to 3.8V.

A7670C module has onboard 1.8V output
it is necessary to use Logic Level Shifter
Provide 1.8V out for the Module to LV +
and GND from Module to GND on Logic Shifter.

Connect LV1 and LV2 to RXD and TXD of A7670C module
Connect HV1 and HV2 to TX2 and RX2 of ESP32

Connect 3.3 V out ESP32 to HV side

LM2596
Input Voltage is 12V DC
Output Voltage is 3.8V for A7670C
Use 2200uf Cap for 2Amp Pulse