Topic 2

Reflection and refraction of light at a planar interface

Reflection and Refraction

When light is incident at the interface of two isotropic media, part of light will be reflected and part will transmit into the second medium (at a different angle) which is called refraction.
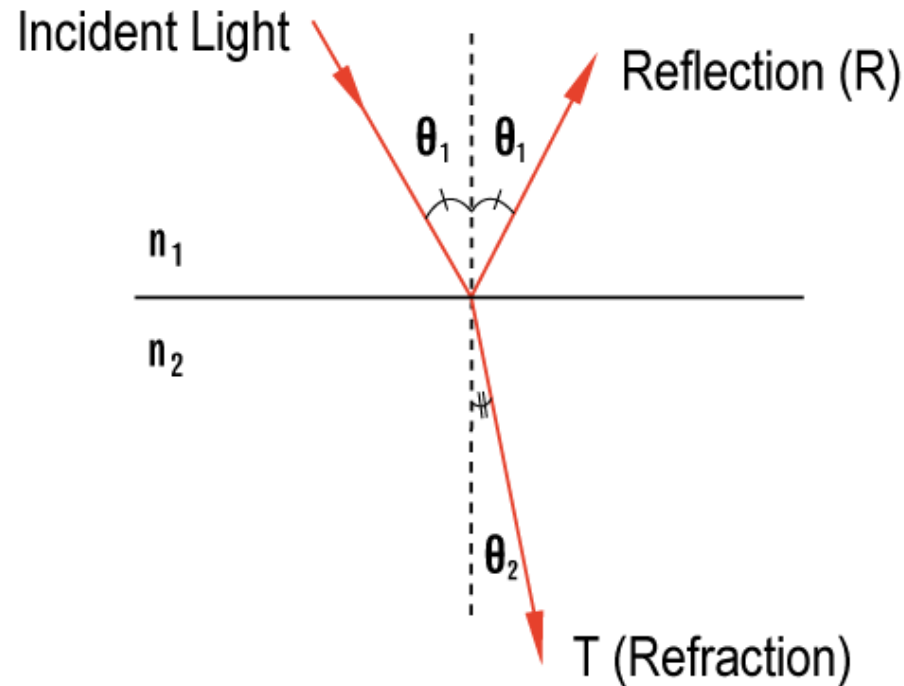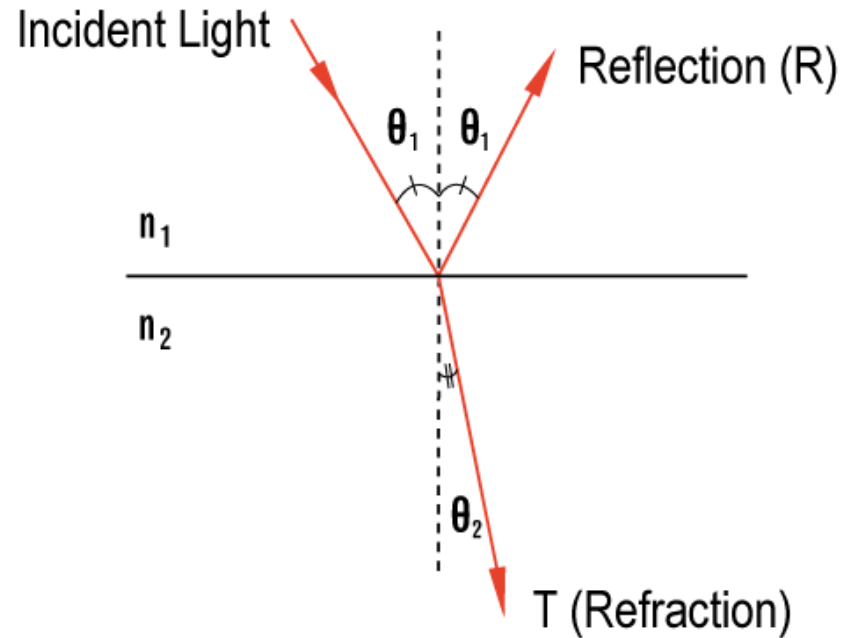
Snell's Law

- Snell's law for refraction
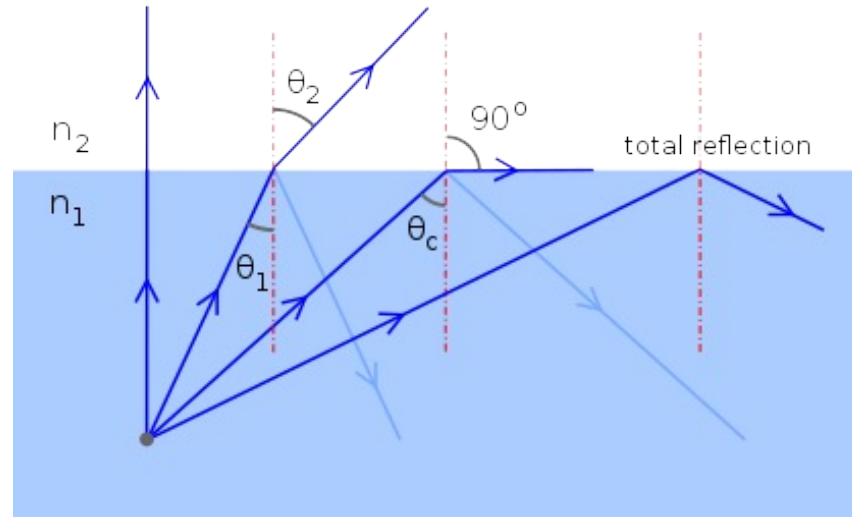
$$n_1 \sin \theta_1 = n_2 \sin \theta_2$$

$$\sin \theta_2 = \frac{n_1}{n_2} \sin \theta_1$$

If $n_1 > n_2$, then $\theta_2 > \theta_1$

If $n_1 < n_2$, then $\theta_2 < \theta_1$

Critical Angle

When light is incident from a medium of high refractive index to a medium of low refractive index, i.e., $n_1 > n_2$, there exists a critical angle θ_c at which the refracted angle is 90°. Light incident at angles larger than θ_c will be 100% reflected. This is called **total internal reflection**.

$$\sin 90° = \frac{n_1}{n_2} \sin \theta_c = 1 \rightarrow \sin \theta_c = \frac{n_2}{n_1}$$
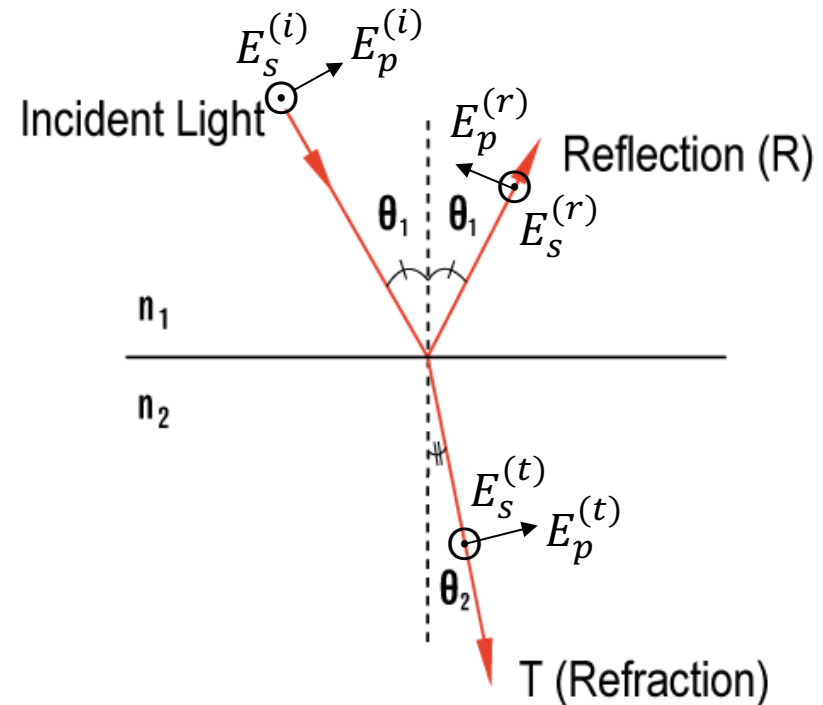
Reflectivity and Transmittivity

$$reflectivity = \frac{reflected\ field}{incident\ field}$$

$$transmittivity = \frac{transmitted\ field}{incident\ field}$$

Reflectivity and transmittivity are dependent on polarization.

p-polarization: also called transverse magnetic (TM) polarization, E-field is in the plane of incidence.

s-polarization: also called transverse electric (TE) polarization, E-field is perpendicular to the plane of incidence.

Incident Light

$E_s^{(i)}$ $E_p^{(i)}$

$E_p^{(r)}$

Reflection (R)

$E_s^{(r)}$

θ_1 θ_1

n_1

n_2

$E_s^{(t)}$

$E_p^{(t)}$

θ_2

T (Refraction)

Reflectivity $r_p = \dfrac{E_p^{(r)}}{E_p^{(i)}}$ $r_s = \dfrac{E_s^{(r)}}{E_s^{(i)}}$

Transmittivity $t_p = \dfrac{E_p^{(t)}}{E_p^{(i)}}$ $t_s = \dfrac{E_s^{(t)}}{E_s^{(i)}}$

Fresnel Formulae

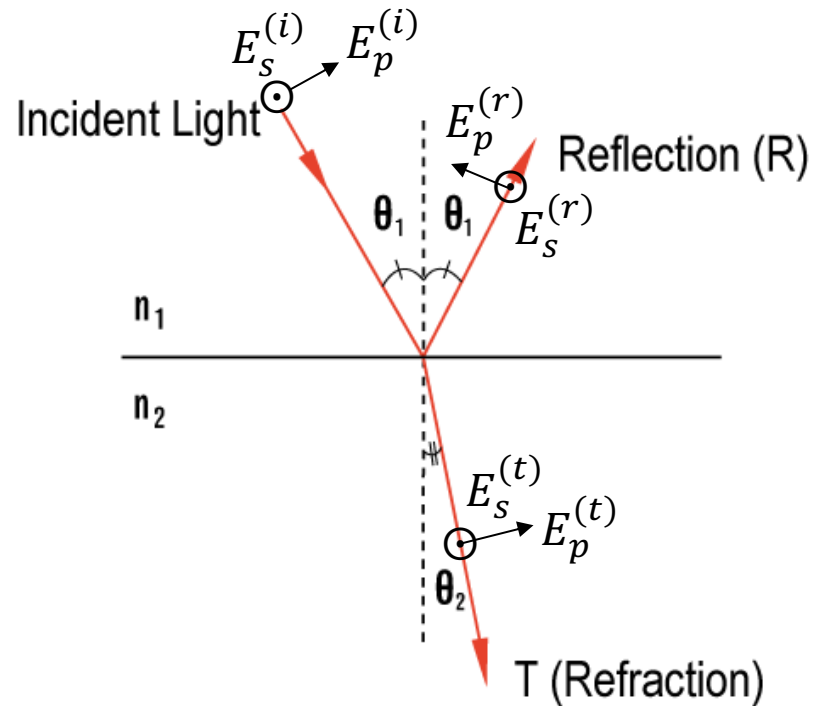- p-polarization (TM-polarization)

$$r_p = \frac{n_2 \cos \theta_1 - n_1 \cos \theta_2}{n_2 \cos \theta_1 + n_1 \cos \theta_2}$$

$$t_p = \frac{2 n_1 \cos \theta_1}{n_2 \cos \theta_1 + n_1 \cos \theta_2}$$

- s-polarization (TE-polarization)

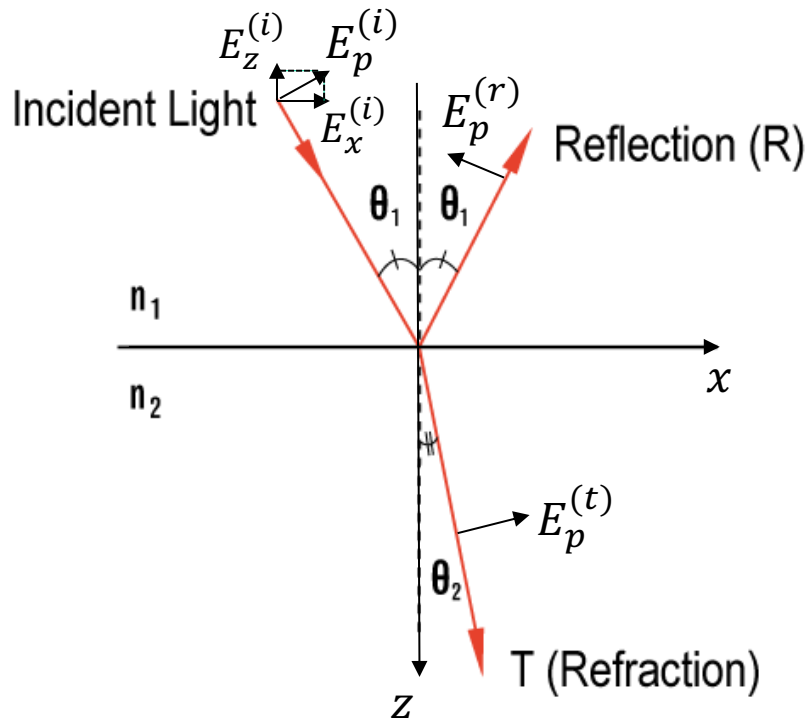$$r_s = \frac{n_1 \cos \theta_1 - n_2 \cos \theta_2}{n_1 \cos \theta_1 + n_2 \cos \theta_2}$$

$$t_s = \frac{2 n_1 \cos \theta_1}{n_1 \cos \theta_1 + n_2 \cos \theta_2}$$

Reflectivity and *Transmittivity* of s-polarization and p-polarization are **independent** from each other.

Derivation of Fresnel Formulae

(1) The case of p-polarization

$E_p^{(i)}, E_p^{(r)}, E_p^{(t)}$ represent the incident, reflected and transmitted fields, respectively. Each electric field can be decomposed into x- and z- components.

Incident field: $E_x^{(i)} = E_p^{(i)} \cos \theta_1$

$E_z^{(i)} = -E_p^{(i)} \sin \theta_1$

Reflected field: $E_x^{(r)} = -E_p^{(r)} \cos \theta_1$

$E_z^{(r)} = -E_p^{(r)} \sin \theta_1$

Refracted field: $E_x^{(t)} = E_p^{(t)} \cos \theta_2$

$E_z^{(t)} = -E_p^{(t)} \sin \theta_2$

Derivation of Fresnel Formulae

Boundary Conditions

1. Tangent components of E-field are continuous across the boundary

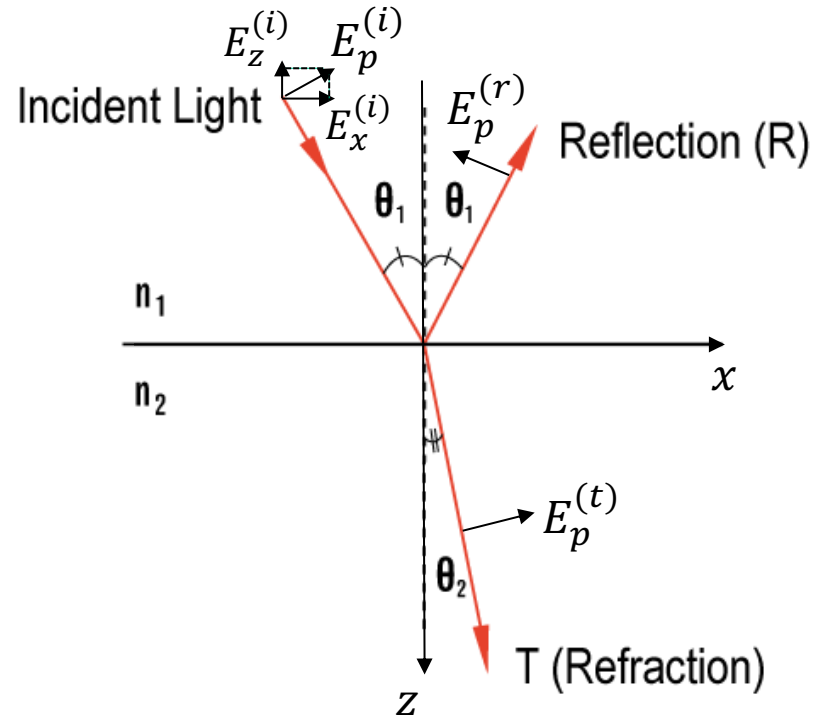$$E_x^{(i)} + E_x^{(r)} = E_x^{(t)} \quad (1)$$

2. Normal components of D-field are continuous across the boundary

$$D_z^{(i)} + D_z^{(r)} = D_z^{(t)}$$

$$D = \varepsilon E = \varepsilon_r \varepsilon_0 E$$

Relative permittivity $\varepsilon_r = n^2$

$$\varepsilon_1 E_z^{(i)} + \varepsilon_1 E_z^{(r)} = \varepsilon_2 E_z^{(t)} \quad (2)$$

Derivation of Fresnel Formulae

Substituting the expressions of E_x and E_z in Eq.(1) and (2), we get

$$E_p^{(i)} \cos \theta_1 - E_p^{(r)} \cos \theta_1 = E_p^{(t)} \cos \theta_2 \qquad (3)$$

$$-\varepsilon_1 E_p^{(i)} \sin \theta_1 - \varepsilon_1 E_p^{(r)} \sin \theta_1 = -\varepsilon_2 E_p^{(t)} \sin \theta_2 \qquad (4)$$

To eliminate $E_p^{(t)}$,   (3)$\times \varepsilon_2 \sin \theta_2 +$ (4)$\times \cos \theta_2$, we get

$$\varepsilon_2 \sin \theta_2 \cos \theta_1 \left[E_p^{(i)} - E_p^{(r)} \right] - \varepsilon_1 \sin \theta_1 \cos \theta_2 \left[E_p^{(i)} + E_p^{(r)} \right] = 0$$

$$(\varepsilon_2 \sin \theta_2 \cos \theta_1 - \varepsilon_1 \sin \theta_1 \cos \theta_2) E_p^{(i)} = (\varepsilon_2 \sin \theta_2 \cos \theta_1 + \varepsilon_1 \sin \theta_1 \cos \theta_2) E_p^{(r)}$$

$$r_p = \frac{E_p^{(r)}}{E_p^{(i)}} = \frac{\varepsilon_2 \sin \theta_2 \cos \theta_1 - \varepsilon_1 \sin \theta_1 \cos \theta_2}{\varepsilon_2 \sin \theta_2 \cos \theta_1 + \varepsilon_1 \sin \theta_1 \cos \theta_2}$$

$$r_p = \frac{E_p^{(r)}}{E_p^{(i)}} = \frac{\varepsilon_2 \sin\theta_2 \cos\theta_1 - \varepsilon_1 \sin\theta_1 \cos\theta_2}{\varepsilon_2 \sin\theta_2 \cos\theta_1 + \varepsilon_1 \sin\theta_1 \cos\theta_2} \qquad (5)$$

Substituting $\qquad \varepsilon_1 = n_1^2 \qquad \varepsilon_2 = n_2^2$

$$r_p = \frac{n_2^2 \sin\theta_2 \cos\theta_1 - n_1^2 \sin\theta_1 \cos\theta_2}{n_2^2 \sin\theta_2 \cos\theta_1 + n_1^2 \sin\theta_1 \cos\theta_2}$$

Applying Snell's law $\qquad n_1 \sin\theta_1 = n_2 \sin\theta_2$

$$n_1^2 \sin\theta_1 = n_1(n_1 \sin\theta_1) = n_1(n_2 \sin\theta_2)$$

$$r_p = \frac{n_2 \sin\theta_2\,(n_2 \cos\theta_1 - n_1 \cos\theta_2)}{n_2 \sin\theta_2\,(n_2 \cos\theta_1 + n_1 \cos\theta_2)} = \frac{n_2 \cos\theta_1 - n_1 \cos\theta_2}{n_2 \cos\theta_1 + n_1 \cos\theta_2}$$

Derivation of Fresnel Formulae

<u>Transmittivity</u>

$$E_p^{(i)} \cos\theta_1 - E_p^{(r)} \cos\theta_1 = E_p^{(t)} \cos\theta_2 \quad (3)$$

Both sides divided by $E_p^{(i)}$

$$\cos\theta_1 - \frac{E_p^{(r)}}{E_p^{(i)}} \cos\theta_1 = \frac{E_p^{(t)}}{E_p^{(i)}} \cos\theta_2$$
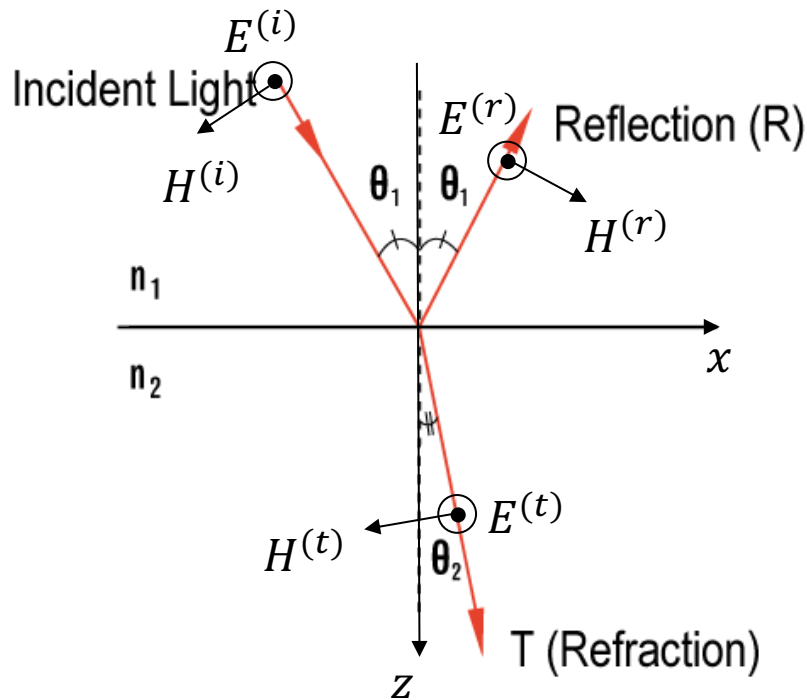
$$\cos\theta_1 - r_p \cos\theta_1 = t_p \cos\theta_2$$

$$t_p = \frac{\cos\theta_1}{\cos\theta_2}(1 - r_p) = \frac{\cos\theta_1}{\cos\theta_2}\left(1 - \frac{n_2 \cos\theta_1 - n_1 \cos\theta_2}{n_2 \cos\theta_1 + n_1 \cos\theta_2}\right)$$

$$= \frac{\cos\theta_1}{\cos\theta_2} \times \frac{2n_1 \cos\theta_2}{n_2 \cos\theta_1 + n_1 \cos\theta_2}$$

$$t_p = \frac{2n_1 \cos\theta_1}{n_2 \cos\theta_1 + n_1 \cos\theta_2}$$

Derivation of Fresnel Formulae

(2) The case of s-polarization

For s-polarization, E-field is perpendicular to the plane of incidence and H-field is in the plane of incidence, as shown in the diagram.

It is noted that the H-fields of s-polarization are analogue to the E-fields of p-polarization (but in opposite directions). If we make the following substitutions, the results of p-polarization can be used for s-polarization.

$$E \rightarrow -H$$
$$D = \varepsilon_r \varepsilon_0 E \rightarrow B = \mu_r \mu_0 H$$
$$\varepsilon_r \rightarrow \mu_r = 1$$

By making the following substitutions in Eq.(5) on slide 10,

$$E_p^{(r)} \to -H^{(r)}, E_p^{(i)} \to -H^{(i)}$$
$$\varepsilon_1 \to \mu_1 = 1, \varepsilon_2 \to \mu_2 = 1$$

we obtain
$$\frac{-H^{(r)}}{-H^{(i)}} = \frac{\sin\theta_2 \cos\theta_1 - \sin\theta_1 \cos\theta_2}{\sin\theta_2 \cos\theta_1 + \sin\theta_1 \cos\theta_2} = -\frac{\sin(\theta_1 - \theta_2)}{\sin(\theta_1 + \theta_2)} \quad (6)$$

According to Maxwell's equations, the magnitude of H-field is proportional to the magnitude of E-field through $H = \frac{E}{\eta}$, η is called impedance of the medium.

$$\eta = \sqrt{\frac{\mu}{\varepsilon}} = \sqrt{\frac{\mu_0}{\varepsilon_r \varepsilon_0}} = \frac{\sqrt{\frac{\mu_0}{\varepsilon_0}}}{\sqrt{\varepsilon_r}} = \frac{\eta_0}{n} \qquad \eta_0 = \sqrt{\frac{\mu_0}{\varepsilon_0}} = 377\Omega, \text{ impedance of vacuum}$$

So, $H^{(r)} = \frac{n_1 E^{(r)}}{\eta_0}, H^{(i)} = \frac{n_1 E^{(i)}}{\eta_0}$

The left side of Eq.(6) means
$$\frac{H^{(r)}}{H^{(i)}} = \frac{\dfrac{n_1 E^{(r)}}{\eta_0}}{\dfrac{n_1 E^{(i)}}{\eta_0}} = \frac{E^{(r)}}{E^{(i)}} = r_s \quad \text{Reflectivity of s-polarisation}$$

Therefore
$$r_s = -\frac{\sin(\theta_1 - \theta_2)}{\sin(\theta_1 + \theta_2)}$$

From Eq.(6) on previous slide

$$r_s = \frac{\sin\theta_2\cos\theta_1 - \sin\theta_1\cos\theta_2}{\sin\theta_2\cos\theta_1 + \sin\theta_1\cos\theta_2} = \frac{\dfrac{\sin\theta_2}{\sin\theta_1}\cos\theta_1 - \cos\theta_2}{\dfrac{\sin\theta_2}{\sin\theta_1}\cos\theta_1 + \cos\theta_2}$$

From Snell's law $\quad \dfrac{\sin\theta_2}{\sin\theta_1} = \dfrac{n_1}{n_2}$, so $\quad r_s = \dfrac{\dfrac{n_1}{n_2}\cos\theta_1 - \cos\theta_2}{\dfrac{n_1}{n_2}\cos\theta_1 + \cos\theta_2} = \dfrac{n_1\cos\theta_1 - n_2\cos\theta_2}{n_1\cos\theta_1 + n_2\cos\theta_2}$

- **Transmittivity**

By making similar substitutions to eq.(3) on slide 11, we obtain

$$n_1 E^{(i)}\cos\theta_1 - n_1 E^{(r)}\cos\theta_1 = n_2 E^{(t)}\cos\theta_2 \quad (7)$$

Both sides divided by $E^{(i)}$, we obtain

$$n_1\cos\theta_1 - n_1\cos\theta_1\frac{E^{(r)}}{E^{(i)}} = n_2\cos\theta_2\frac{E^{(t)}}{E^{(i)}}$$

$$n_1\cos\theta_1\,(1 - r_s) = n_2\cos\theta_2\,t_s$$

$$t_s = \frac{n_1\cos\theta_1\,(1 - r_s)}{n_2\cos\theta_2} = \frac{2n_1\cos\theta_1}{n_1\cos\theta_1 + n_2\cos\theta_2}$$

Fresnel Formulae

Fresnel formulae can also be written in trigonometric forms by eliminating the refractive index n_1 and n_2 by applying Snell's law.

$$r_p = \frac{\tan(\theta_1 - \theta_2)}{\tan(\theta_1 + \theta_2)}$$

$$r_s = -\frac{\sin(\theta_1 - \theta_2)}{\sin(\theta_1 + \theta_2)}$$

$$t_p = \frac{2\cos\theta_1 \sin\theta_2}{\sin(\theta_1 + \theta_2)\cos(\theta_1 - \theta_2)}$$

$$t_s = \frac{2\cos\theta_1 \sin\theta_2}{\sin(\theta_1 + \theta_2)}$$

Trigonometric Fresnel Formulae

$$r_p = \frac{n_2 \cos\theta_1 - n_1 \cos\theta_2}{n_2 \cos\theta_1 + n_1 \cos\theta_2} = \frac{\cos\theta_1 - n_1/n_2 \cos\theta_2}{\cos\theta_1 + n_1/n_2 \cos\theta_2}$$

From Snell's law $\quad n_1/n_2 = \sin\theta_2 / \sin\theta_1$

$$r_p = \frac{\cos\theta_1 - \dfrac{\sin\theta_2}{\sin\theta_1}\cos\theta_2}{\cos\theta_1 + \dfrac{\sin\theta_2}{\sin\theta_1}\cos\theta_2} = \frac{\sin\theta_1 \cos\theta_1 - \sin\theta_2 \cos\theta_2}{\sin\theta_1 \cos\theta_1 + \sin\theta_2 \cos\theta_2} = \frac{\sin(2\theta_1) - \sin(2\theta_2)}{\sin(2\theta_1) + \sin(2\theta_2)}$$

$$= \frac{2\sin(\theta_1 - \theta_2)\cos(\theta_1 + \theta_2)}{2\sin(\theta_1 + \theta_2)\cos(\theta_1 - \theta_2)} = \frac{\tan(\theta_1 - \theta_2)}{\tan(\theta_1 + \theta_2)}$$

The other formulae can be obtained in similar ways

Brewster Angle

p−polarisation

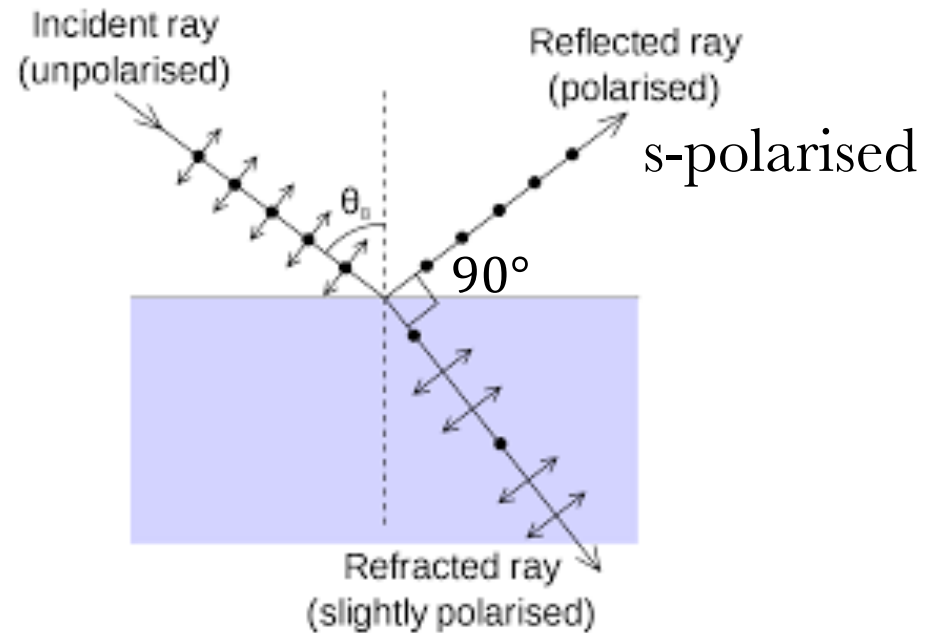$$r_p = \frac{\tan(\theta_1 - \theta_2)}{\tan(\theta_1 + \theta_2)}$$

(a) Brewster angle

When $\theta_1 + \theta_2 = 90°$

$\tan(\theta_1 + \theta_2) = \infty$

$r_p = 0$

Zero-reflectance of the p-polarisation field. The reflected light is completely **s-polarised**

Incident ray (unpolarised)

Reflected ray (polarised)

s-polarised

θ_b

90°

Refracted ray (slightly polarised)

$$n_1 \sin\theta_b = n_2 \sin\theta_2 = n_2 \sin(90° - \theta_b) = n_2 \cos\theta_b$$

↓

Brewster angle

$$\tan\theta_b = \frac{n_2}{n_1}$$

Brewster Angle Polariser

Light incident on a stack of plates at the Brewster angle can be used to separate s- and p-polarisation light.

From air to glass surface

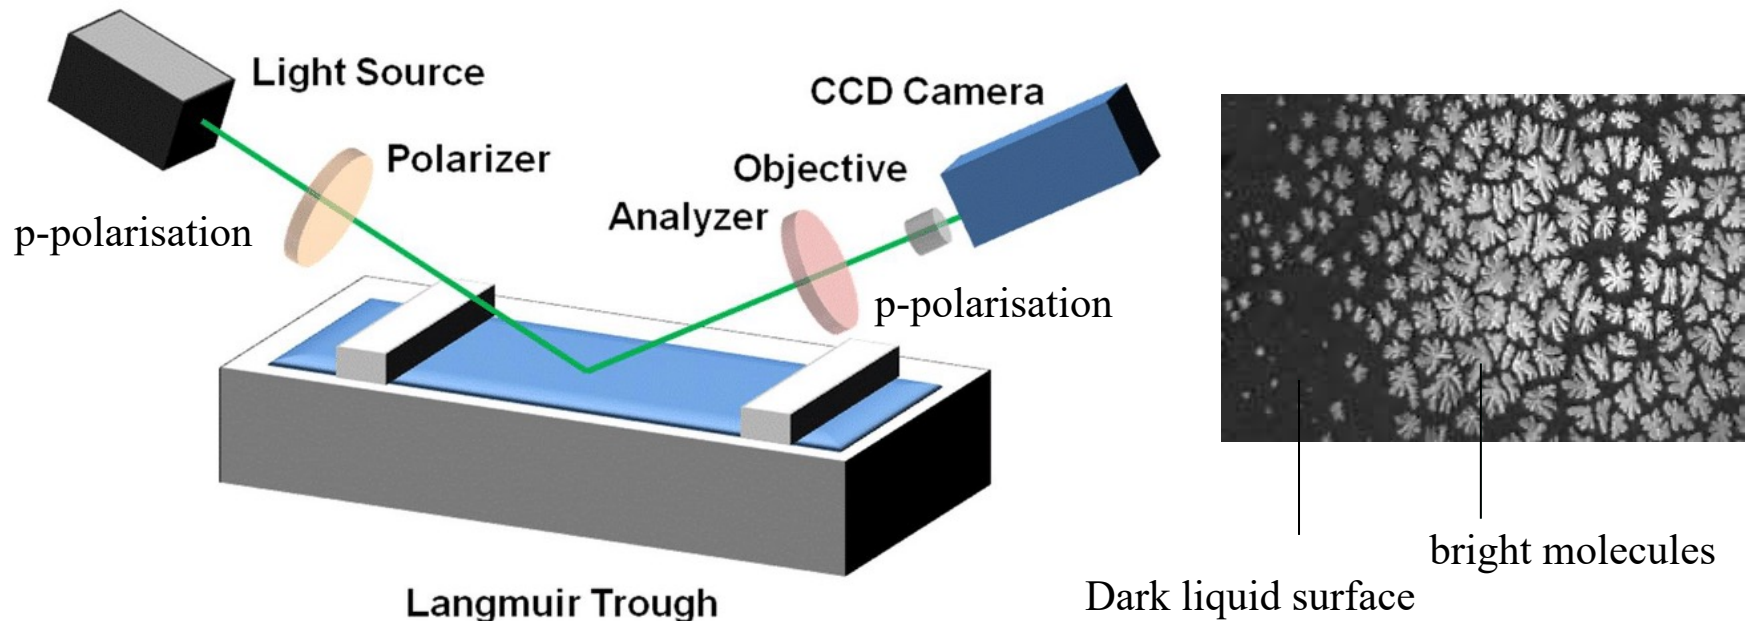$$\tan \theta_b = 1.5 \Rightarrow \theta_b = 56.3°$$
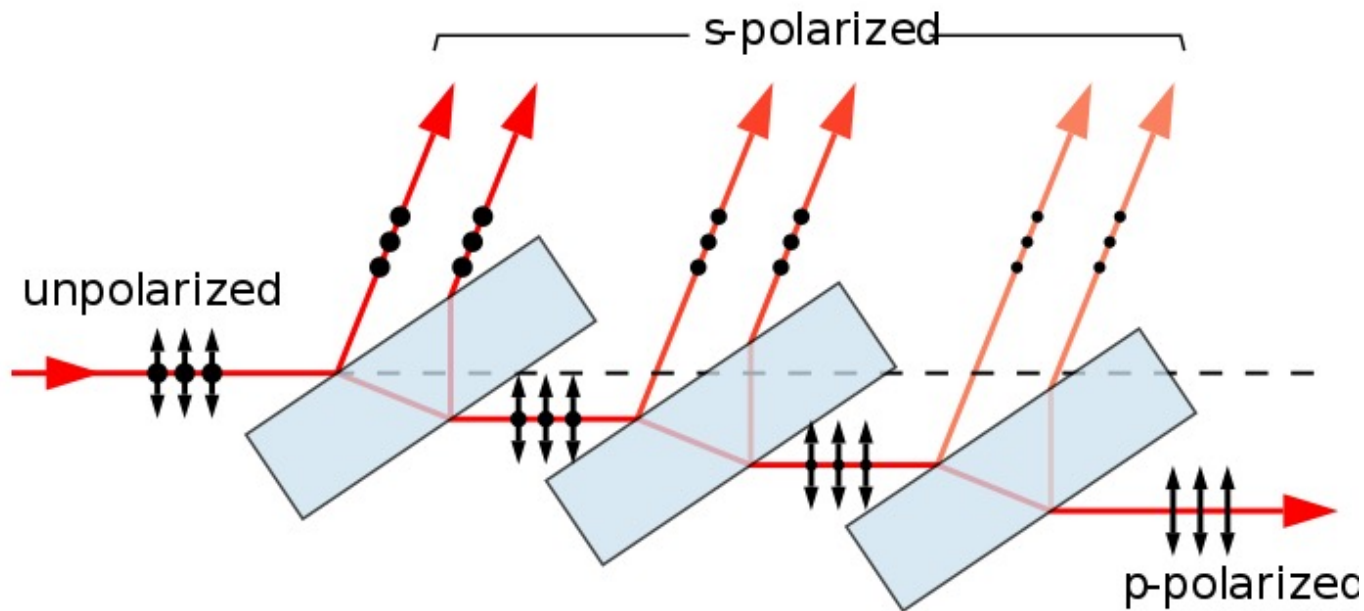
Brewster Angle Cavity

Brewster angle can be used to eliminate reflection. In a laser cavity, the window that seals the lasing medium (e.g., gases) is usually tilted with the Brewster angle so that p-polarized light can completely transmit through with the loss of reflection, while the s-polarization has loss due to reflection, so the emission of laser is linearly polarized with p-polarisation, which is desirable for many applications.

window

Brewster angle

Lasing medium
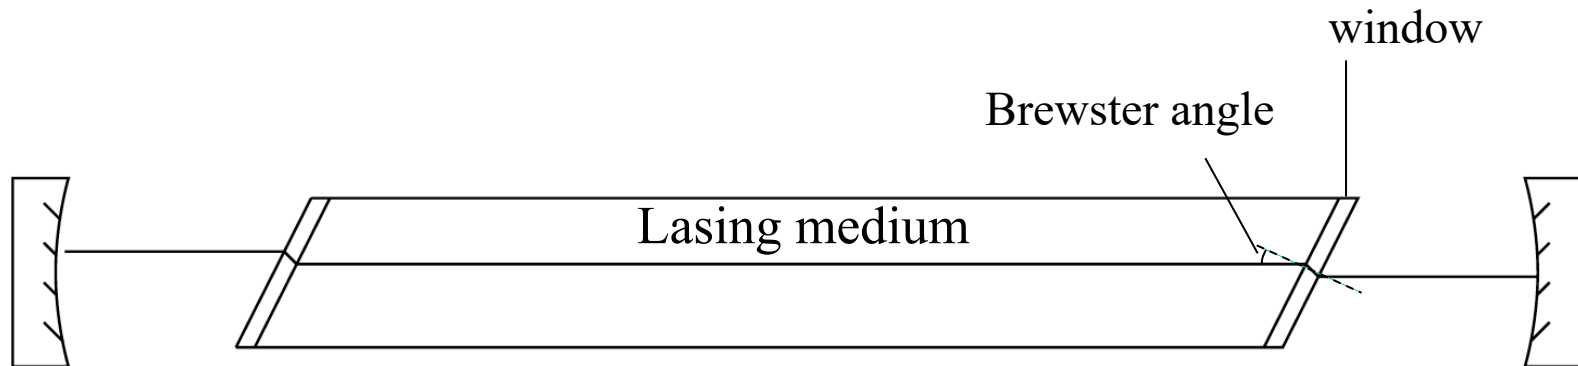
Brewster Angle Microscope

Brewster angle microscope: p-polarized light is incident at the Brewster angle to a liquid surface. A clean liquid surface has no reflection of p-polarized light, hence appears dark. When molecules or nanoparticles accumulate on the surface, the Brewster angle is different so that some portion of p-polarized light is reflected, therefore the molecules or nanoparticles will appear bright.

Brewster angle microscope is a powerful tool for investigating thin films (e.g., the Langmuir-Blodgett film) on liquid surface.

Light Source

Polarizer

p-polarisation

CCD Camera

Objective

Analyzer

p-polarisation

Langmuir Trough

bright molecules

Dark liquid surface

Reflectance

$$Reflectance = \frac{Reflected\ power}{Incident\ power}$$

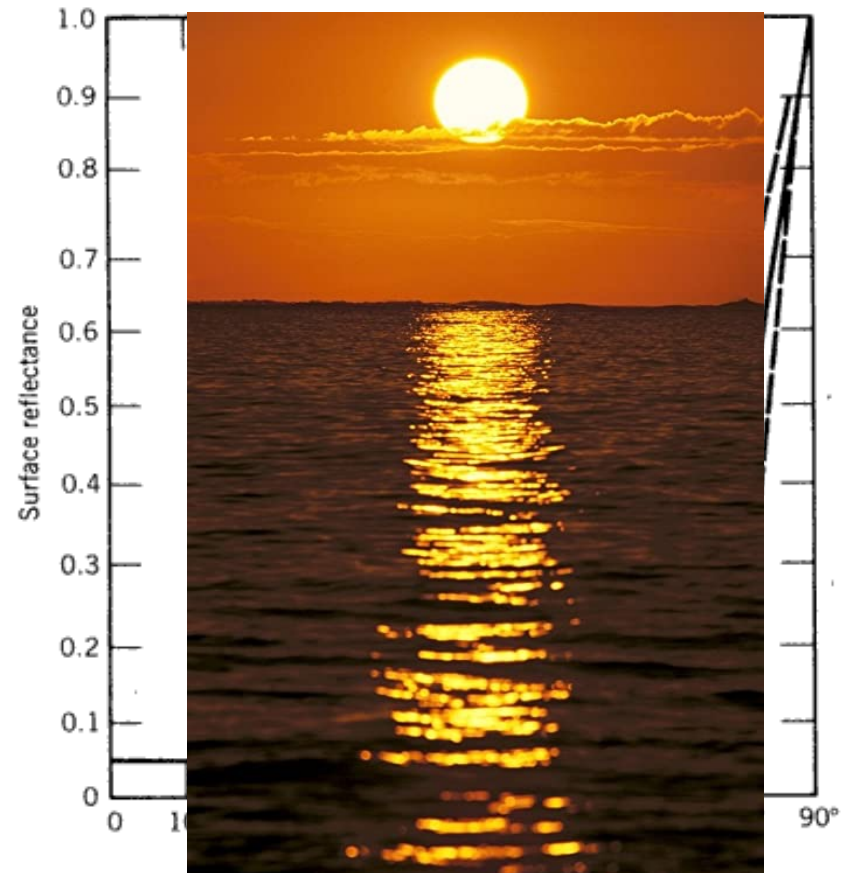$$Reflectance = |reflectivity|^2$$

$$R = |r|^2$$

$$R_p = |r_p|^2 = |\frac{n_2 \cos\theta_1 - n_1 \cos\theta_2}{n_2 \cos\theta_1 + n_1 \cos\theta_2}|^2$$

$$R_s = |r_s|^2 = |\frac{n_1 \cos\theta_1 - n_2 \cos\theta_2}{n_1 \cos\theta_1 + n_2 \cos\theta_2}|^2$$

Reflectance of light incident from air to glass

s-polarisation

p−polarisation

unpolarised

Surface reflectance

Angle of incidence, θ_i
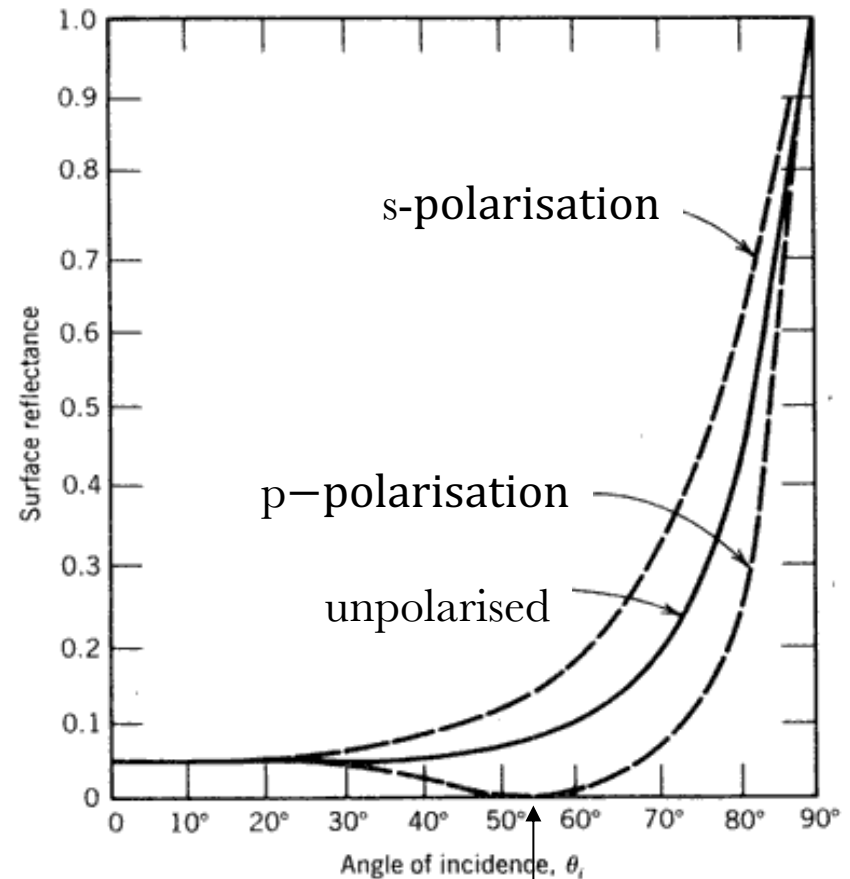
Brewster angle

Understanding Reflectance

(a) Normal incidence, $\theta_1 = \theta_2 = 0$

$$R_p = R_s = \left| \frac{n_1 - n_2}{n_1 + n_2} \right|^2$$

(b) Grazing angle, $\theta_1 \rightarrow 90°$

$$\cos \theta_1 \approx 0$$

$$r_p = \frac{n_2 \cos \theta_1 - n_1 \cos \theta_2}{n_2 \cos \theta_1 + n_1 \cos \theta_2} \approx -1$$

$$r_s = \frac{n_1 \cos \theta_1 - n_2 \cos \theta_2}{n_1 \cos \theta_1 + n_2 \cos \theta_2} \approx -1$$

$$R_p \approx R_s \rightarrow 1$$

Strong reflection at grazing angle, e.g., sunset reflection on water surface

Reflectance of light incident from air to glass

Brewster angle

Understanding Reflectance

(c) In general,

$$r_p = \frac{\tan(\theta_1 - \theta_2)}{\tan(\theta_1 + \theta_2)}$$

$$r_s = -\frac{\sin(\theta_1 - \theta_2)}{\sin(\theta_1 + \theta_2)}$$

$$\frac{R_s}{R_p} = |\frac{\cos(\theta_1 - \theta_2)}{\cos(\theta_1 + \theta_2)}|^2 \geq 1$$

Reflection of s-polarisation is generally greater than that of p-polarisation, especially near the Brewster angle.

Reflectance of light incident from air to glass

Brewster angle
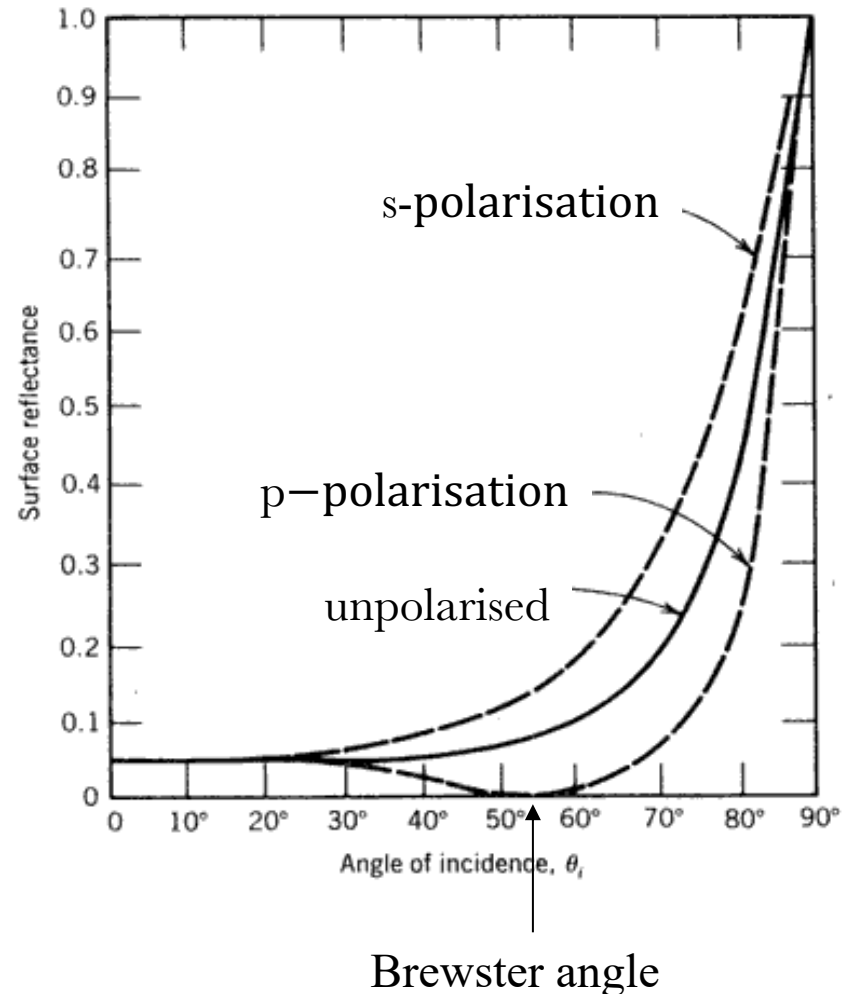
Degree of Polarisation of Reflected Light

Degree of polarisation

$$P = \frac{\sqrt{S_1^2 + S_2^2 + S_3^2}}{S_0}$$

$$\langle E_x(t)E_y^*(t) \rangle$$

$$= \frac{1}{T}\int_0^T E_s^{(r)}e^{i(\omega t - kz + \delta_x(t))}E_p^{(r)}e^{-i(\omega t - kz + \delta_y(t))}dt$$

$$= \frac{E_s^{(r)}E_p^{(r)}}{T}\int_0^T e^{-i\delta(t)}dt = 0$$

Similarly, $\langle E_y(t)E_x^*(t) \rangle = 0$, therefore $S_2 = S_3 = 0$

$$S_0 = |E_s^{(r)}|^2 + |E_p^{(r)}|^2 = (R_s + R_p)E_0^2$$

$$S_1 = |E_s^{(r)}|^2 - \left|E_p^{(r)}\right|^2 = (R_s - R_p)E_0^2$$

E_0 the magnitude of the s- and p-polarization component of incident light
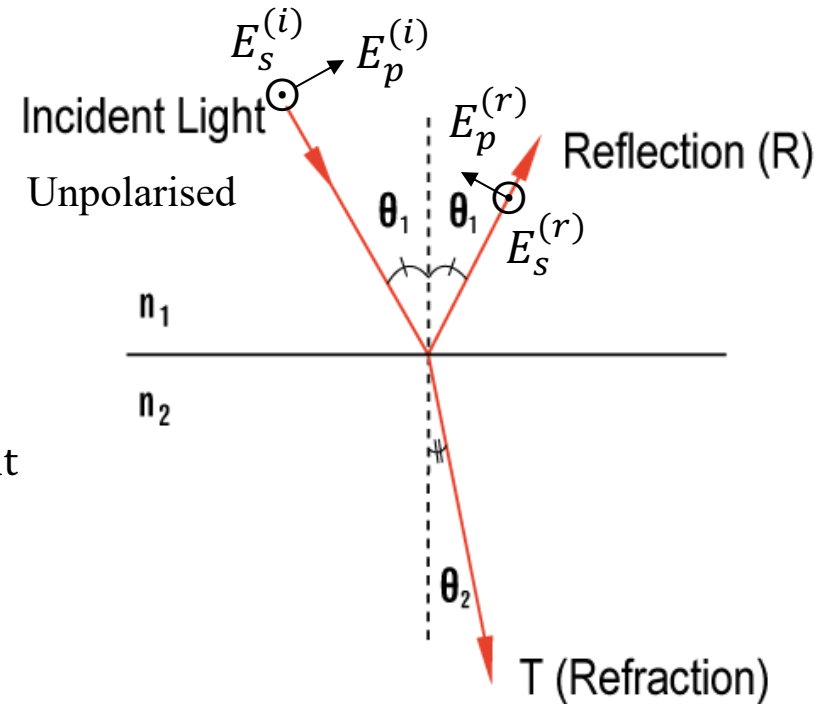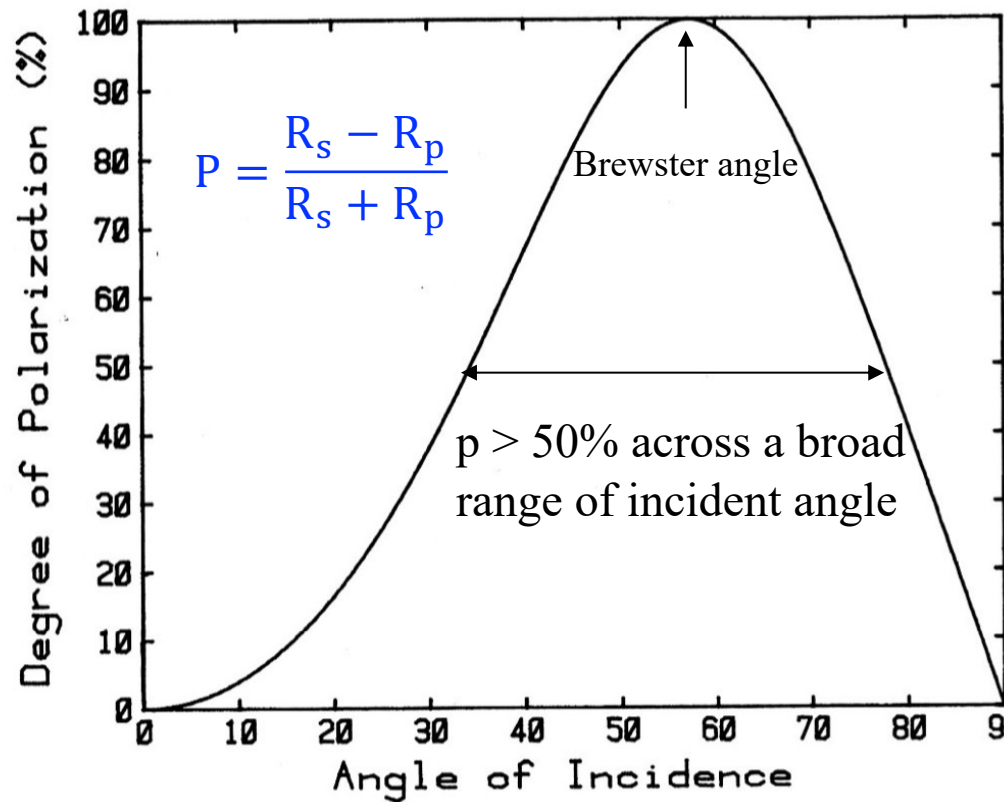

Degree of polarisation

$$P = \frac{S_1}{S_0} = \frac{R_s - R_p}{R_s + R_p}$$

Degree of Polarisation of Reflected Light

The degree of polarisation of reflected
light at air/glass interface.

$$P = \frac{R_s - R_p}{R_s + R_p}$$

Brewster angle

p > 50% across a broad
range of incident angle

s-polarisation

p−polarisation
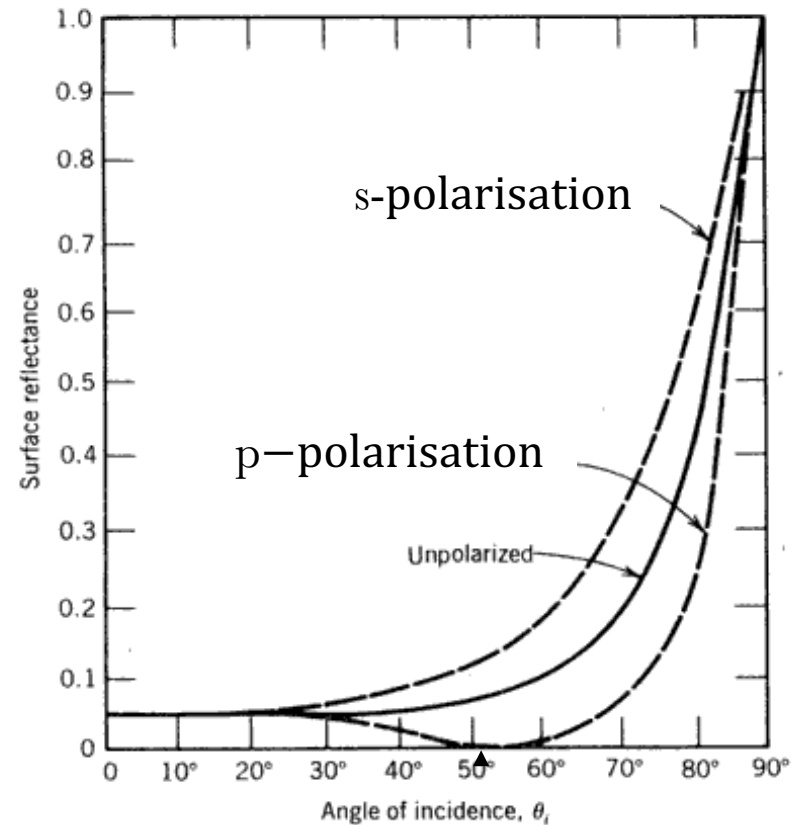
Unpolarized

Upon reflection, unpolarized light becomes partially polarized. The degree of
polarization is maximum (100% polarised) at Brewster angle and minimum (zero)
near normal and grazing incident angles.

Polarised Sunglasses

Sunglasses with polarized filters can block most of glare light reflected from surface, therefore improving the visibility under strong reflection condition.

View without sunglasses

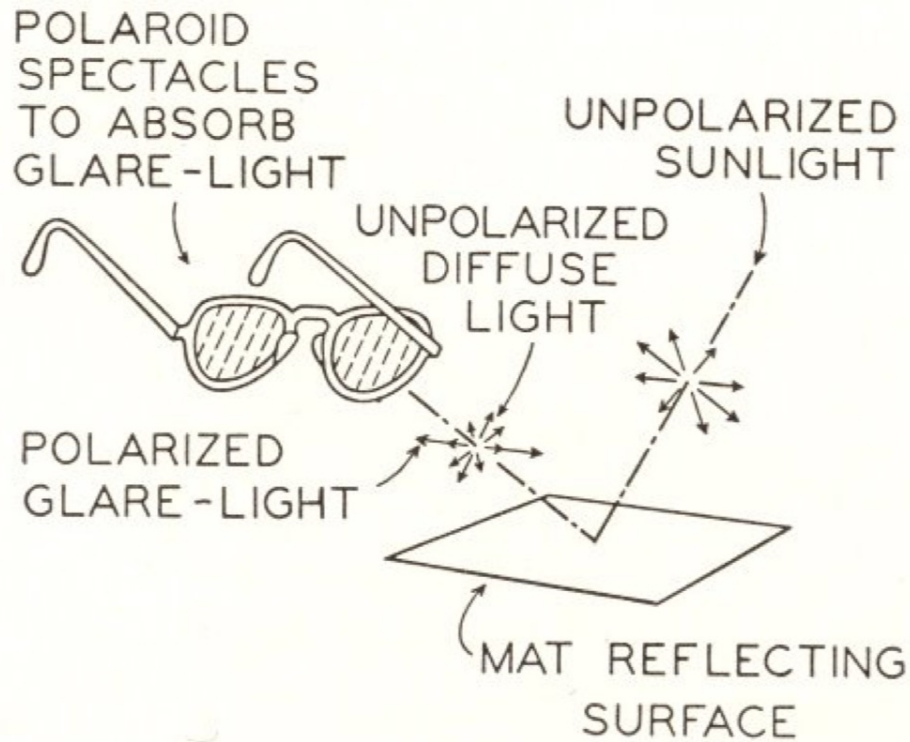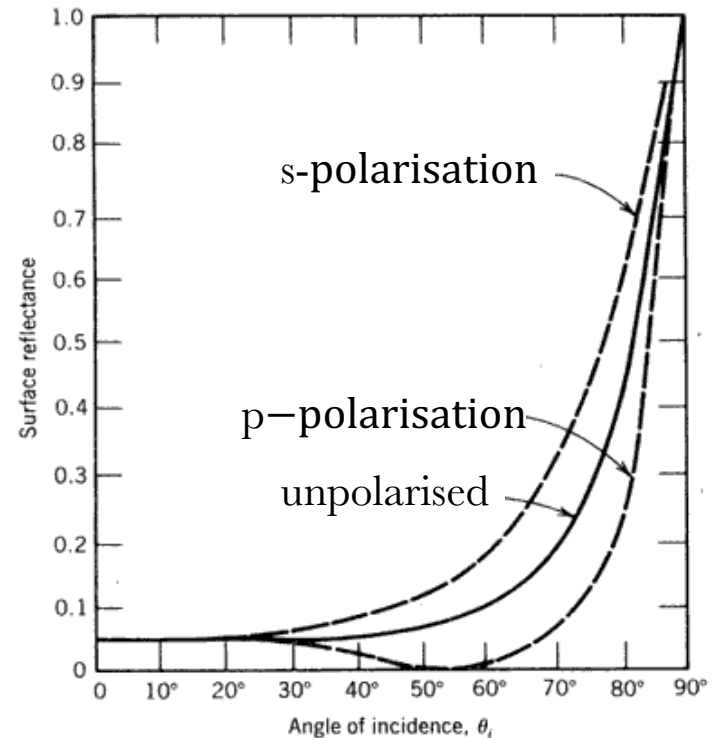View with polarized sunglasses

Polarised Sunglasses

FIG. V-1. The Principle of Polarizing Sunglasses

Light from a horizontal surface is composed of unpolarized diffused light and specular reflection light which is mainly s-polarised. The specular reflection light can be blocked by sunglasses filters with vertical polarisation axis, therefore the view can be significantly improved.

Dehazing Imaging

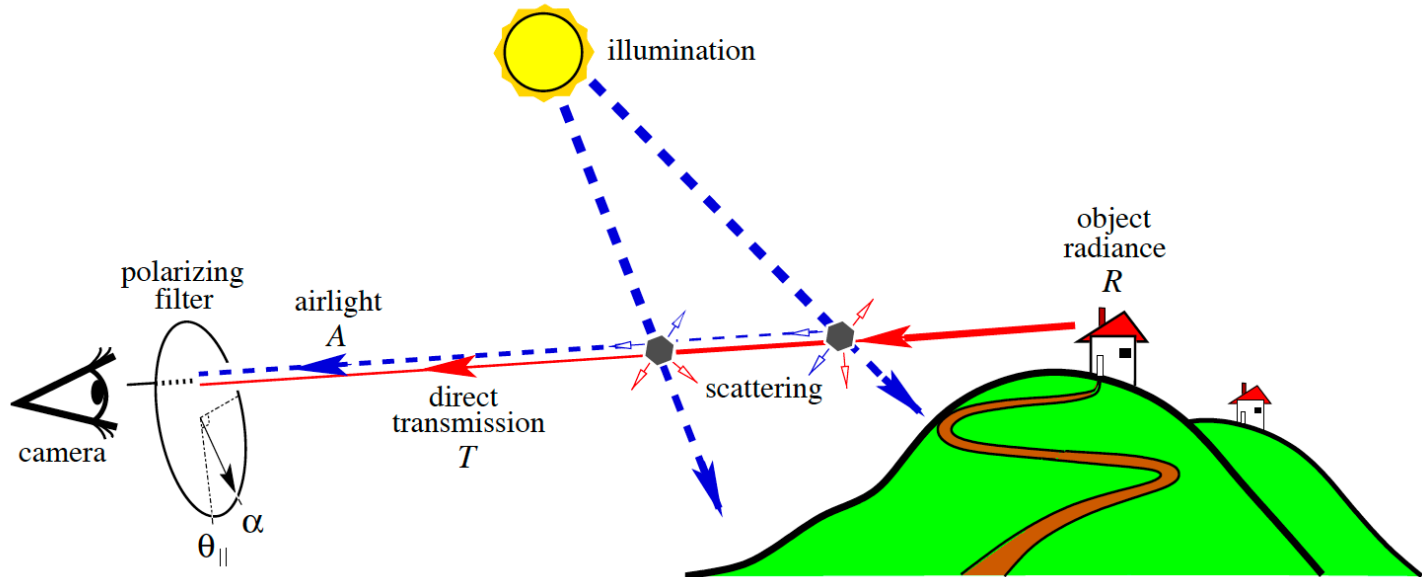Polarised lens can significantly improve the image quality in a hazy day.

Original image

Dehazed image with polariser

Dehazing Imaging

Light received by a camera is composed of two parts: direct transmission light from distant objects and the scattering light by small particles in air. The direct transmitted light is unpolarized while the scattering light is strongly polarized which can be blocked with a polarising filter, therefore the image appears clearer.

Dehazing Imaging

polariser

sun

Scattering light

Camera

y x

z
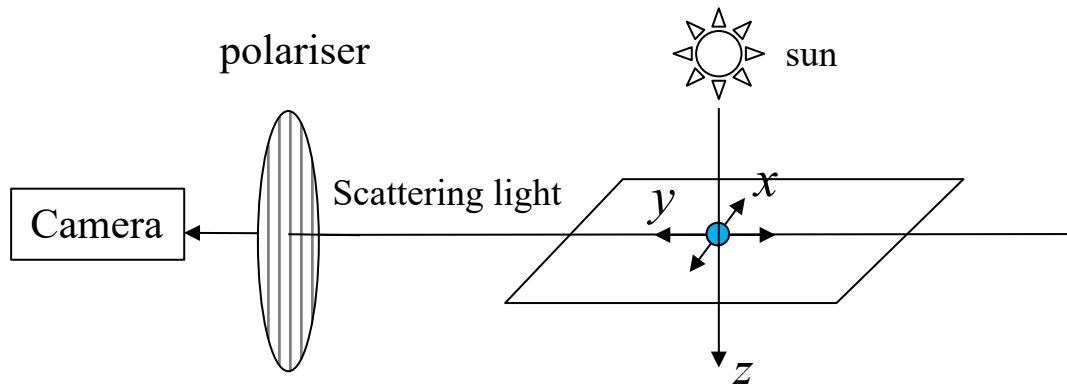
Angular dependent radiation of an electric dipole

θ

E p r $E_\perp$ E_z E
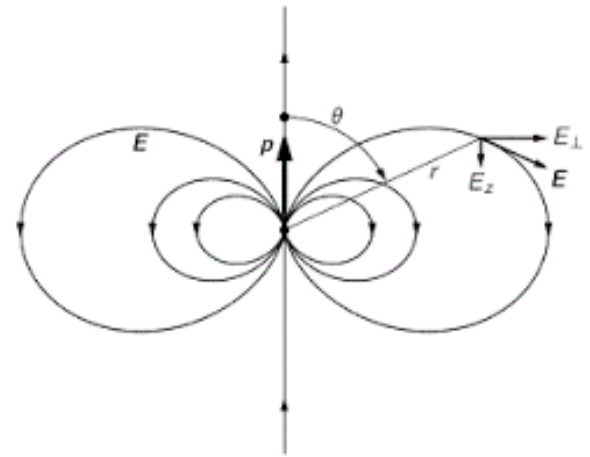
- A small particle in air can be modelled as an electric dipole with dipole moments along the x- and y- direction, respectively.
- Electric dipole radiates strongly in the direction perpendicular to the dipole moment, but weakly along the dipole oscillating direction.
- The scattering light received by the camera is mainly from the x-dipole (as the y-dipole has no radiation towards the camera.), so it is mainly polarized along the x-direction, hence can be blocked with a polariser along the z-direction.

Total Internal Reflection (TIR)

When light is incident from a medium of high refractive index to a medium of low refractive index, there exists a critical angle θ_c.

$$\sin \theta_c = \frac{n_2}{n_1}$$

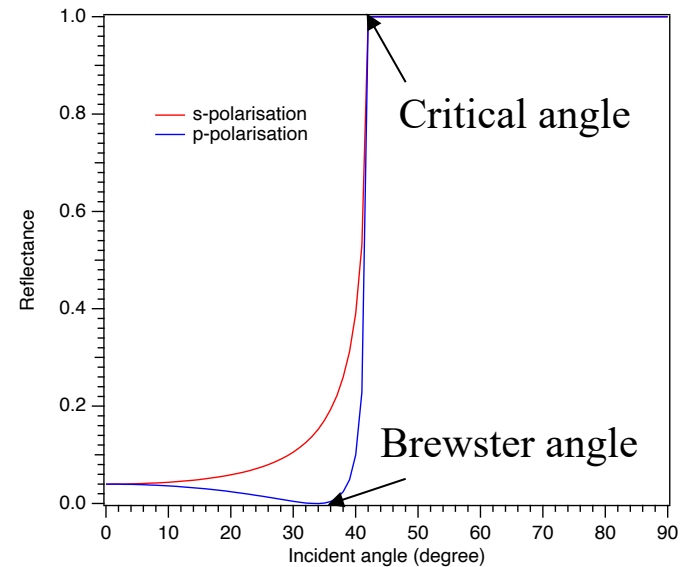For $\theta_1 > \theta_c$, $\sin \theta_2 = \frac{n_1}{n_2} \sin \theta_1 > 1$

No real solution

Light incident from glass to air

$$\cos \theta_2 = \sqrt{1 - (\sin \theta_2)^2} = i\sqrt{(\sin \theta_2)^2 - 1}$$

$$R_p = |r_p|^2 = \left| \frac{n_2 \cos \theta_1 - n_1 \cos \theta_2}{n_2 \cos \theta_1 + n_1 \cos \theta_2} \right|^2 = \left| \frac{n_2 \cos \theta_1 - i n_1 \sqrt{(\sin \theta_2)^2 - 1}}{n_2 \cos \theta_1 + i n_1 \sqrt{(\sin \theta_2)^2 - 1}} \right|^2 = 1$$
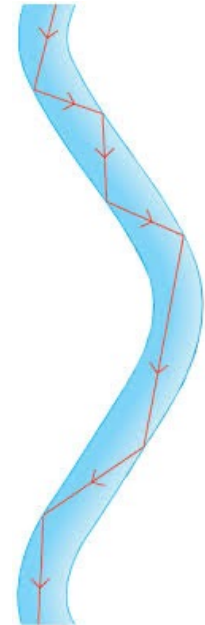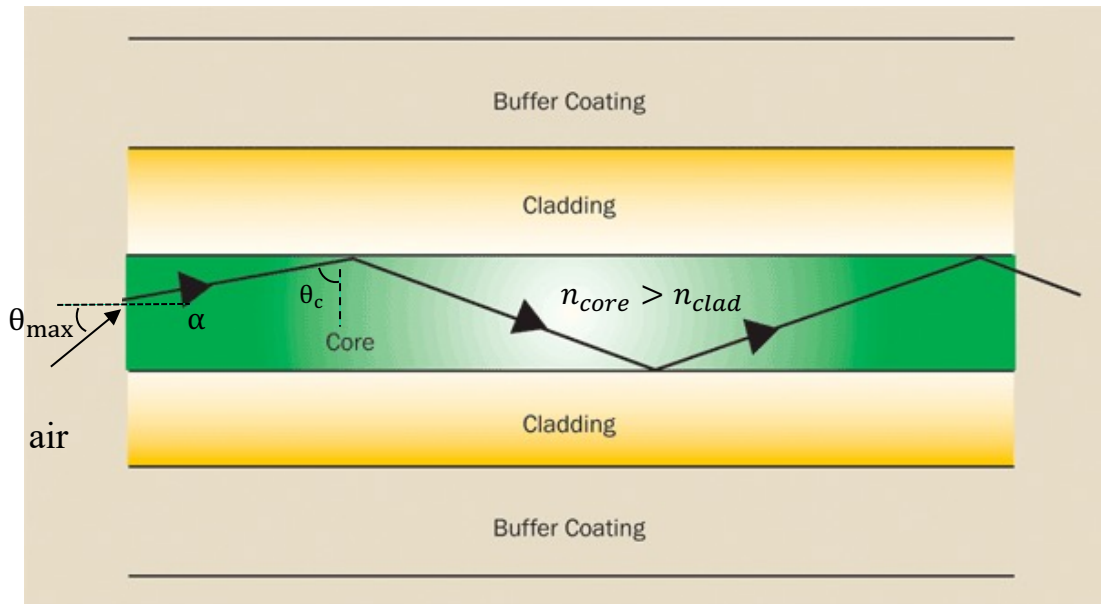
$$R_s = |r_s|^2 = \left| \frac{n_1 \cos \theta_1 - n_2 \cos \theta_2}{n_1 \cos \theta_1 + n_2 \cos \theta_2} \right|^2 = \left| \frac{n_1 \cos \theta_1 - i n_2 \sqrt{(\sin \theta_2)^2 - 1}}{n_1 \cos \theta_1 + i n_2 \sqrt{(\sin \theta_2)^2 - 1}} \right|^2 = 1$$

Optical Fiber

Total internal reflection is exploited to guide light in conventional optical fiber

Maximum incident angle: $\sin \theta_{max} = n_{core} \sin \alpha = n_{core} \cos \theta_c \quad (\theta_c = 90° - \alpha)$
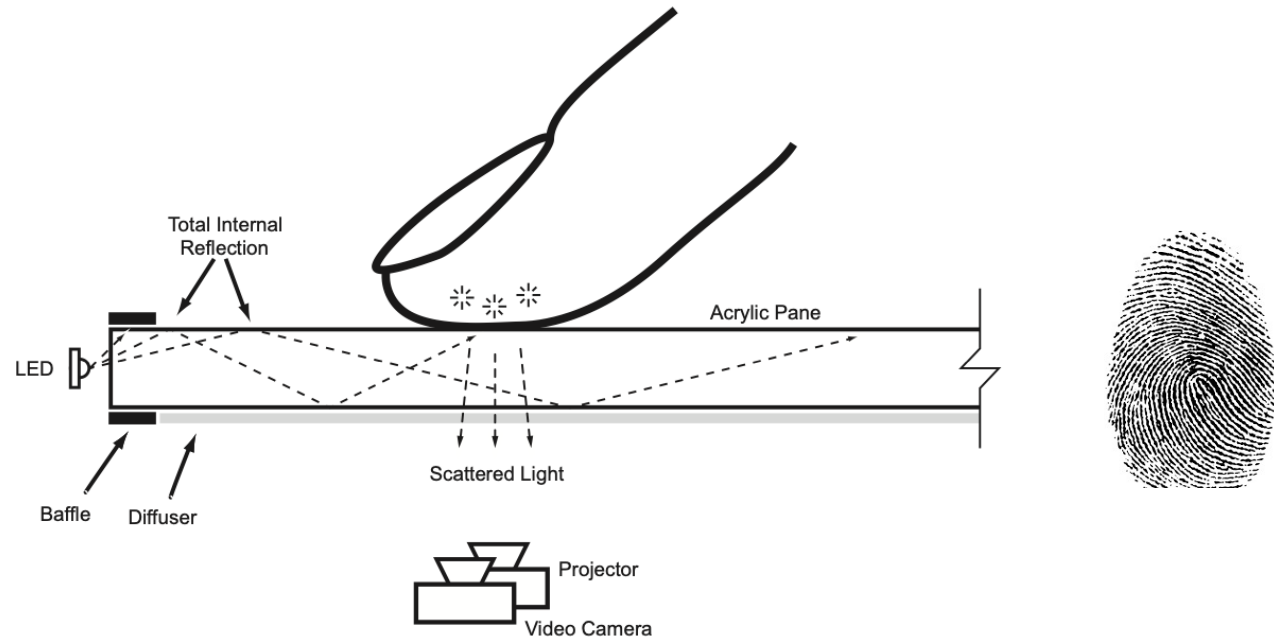
$$\boxed{\sin \theta_{max}} = n_{core}\sqrt{1 - (\sin \theta_c)^2} = n_{core}\sqrt{1 - \left(\frac{n_{clad}}{n_{core}}\right)^2} = \sqrt{n_{core}^2 - n_{clad}^2}$$

Numerical aperture of fiber

$$\sin \theta_c = \frac{n_{clad}}{n_{core}}$$

Fingerprint Recording

TIR is very sensitive to external stimuli, such as pressure, bending, touch, attachment of analyte molecules etc, therefore has been widely exploited in a broad range of sensing applications.

Finger print recording: the touch of finger breaks the TIR condition. Light is scattered from the finger and recorded by the camera underneath.
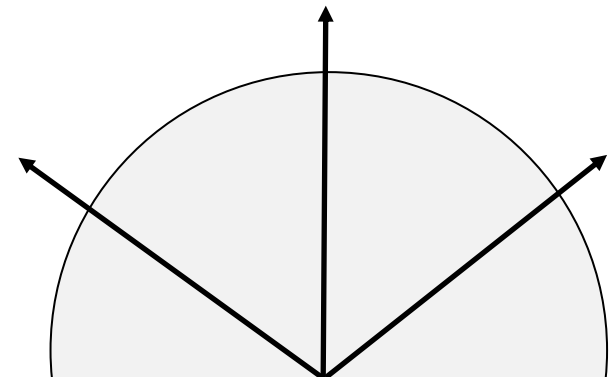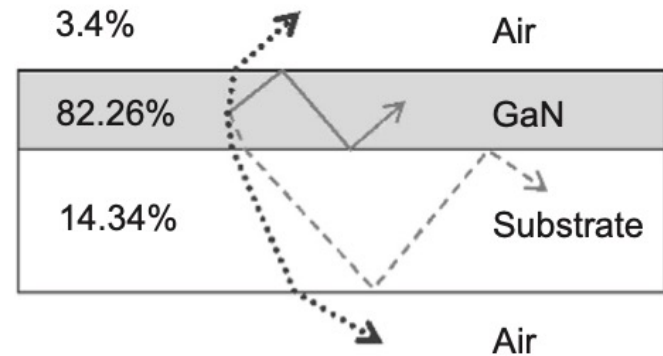
Light Extraction in LED
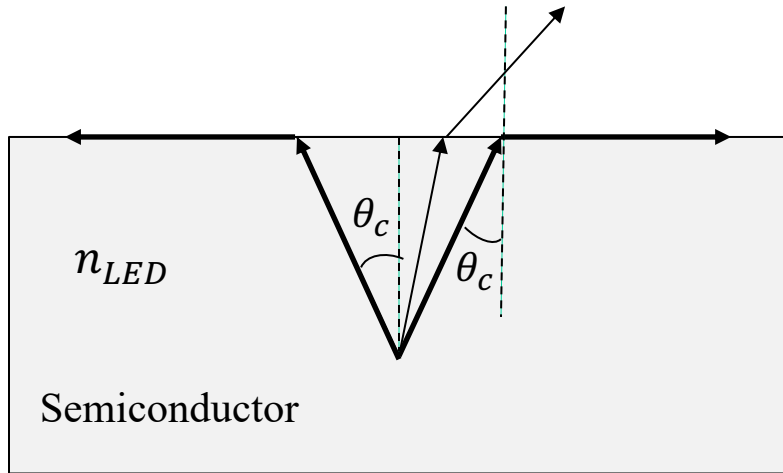
Planar LED

The refractive index of LED materials is typoically between 2.5~3.5.

$$n_{LED} = 3 \rightarrow \sin \theta_c = \frac{1}{3} \rightarrow \theta_c = 19.4°$$

Light emission of a planar LED is restricted to a cone with semi angle equal to the critical angle. Curved surfaces (such as a hemisphere) have larger escape angles, hence can significantly increase the efficiency of LED.

Hemisphere LED

Phase Change in Reflection

The E-field of reflected light could have different phases from that of incident light, i.e., reflection could cause a phase change of light.

Reflectivity
$$r = \frac{E^{(r)}}{E^{(i)}} = \frac{E_0^{(r)} e^{i\varphi^{(r)}}}{E_0^{(i)} e^{i\varphi^{(i)}}} = \frac{E_0^{(r)}}{E_0^{(i)}} e^{i\Delta\varphi}$$

Phase change
$$\Delta\varphi = \varphi^{(r)} - \varphi^{(i)}$$

(1) When r is real, $\Delta\varphi = 0$ for $r > 0$; $\Delta\varphi = \pi$ for $r < 0$.

(2) In the situation of total internal reflection ($\theta_1 > \theta_c$), r is complex. $\Delta\varphi$ is dependent on incident angle.

Phase Change in Reflection
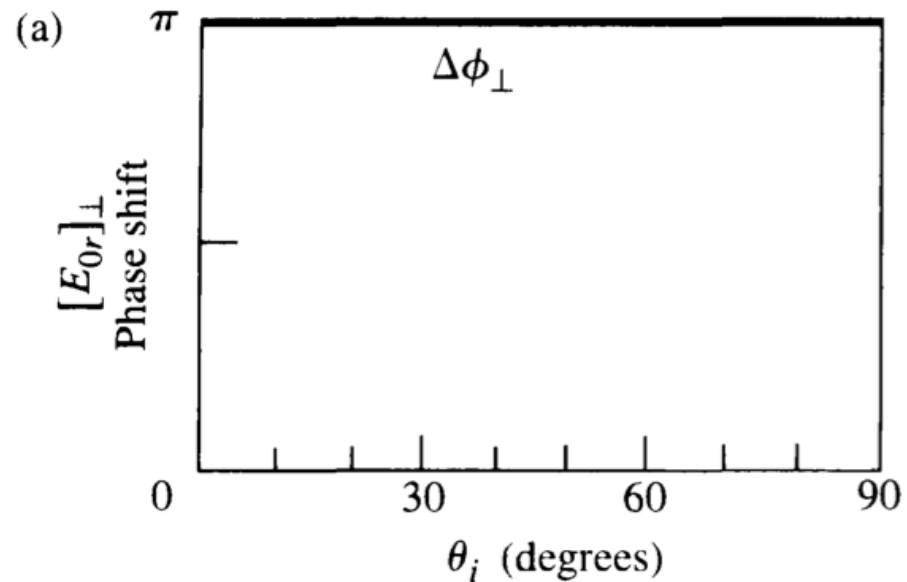
Case I: $n_1 < n_2,\quad \theta_1 > \theta_2$

Light is incident from low-index medium to high-index medium

(1) s-polarisation

$$r_s = -\frac{\sin(\theta_1 - \theta_2)}{\sin(\theta_1 + \theta_2)} < 0$$

$$\varphi = \pi$$

(a) Phase shift $[E_{0r}]_\perp$, $\Delta\phi_\perp$ vs θ_i (degrees), from 0 to 90, constant at π.

Phase Change in Reflection

Case I: $n_1 < n_2, \quad \theta_1 > \theta_2$

(2) p-polarisation

$$r_p = \frac{\tan(\theta_1 - \theta_2)}{\tan(\theta_1 + \theta_2)}$$
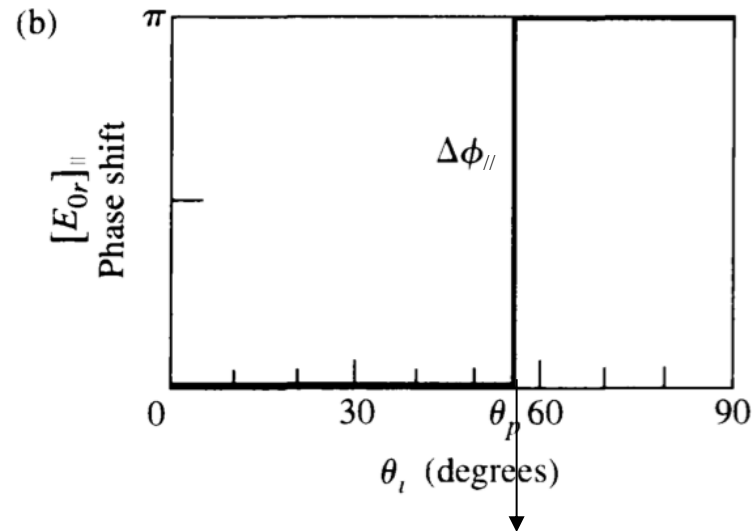
(a) When $\theta_1 < \theta_b$,

$\theta_1 + \theta_2 < 90°$

$r_p > 0 \rightarrow \Delta\varphi = 0$

(b) When $\theta_1 > \theta_b$,

$\theta_1 + \theta_2 > 90°$

$r_p < 0 \rightarrow \Delta\varphi = \pi$

(b) $\Delta\phi_{//}$

$[E_{0r}]_{=}$ Phase shift

θ_i (degrees)

Brewster angle 56.3^0 (from air to glass)

Phase Change in Reflection

Case II: $n_1 > n_2,\ \theta_1 < \theta_2$

Light is incident from high-index medium to low-index medium

(1) s-polarisation $\quad r_s = -\dfrac{\sin(\theta_1 - \theta_2)}{\sin(\theta_1 + \theta_2)}$
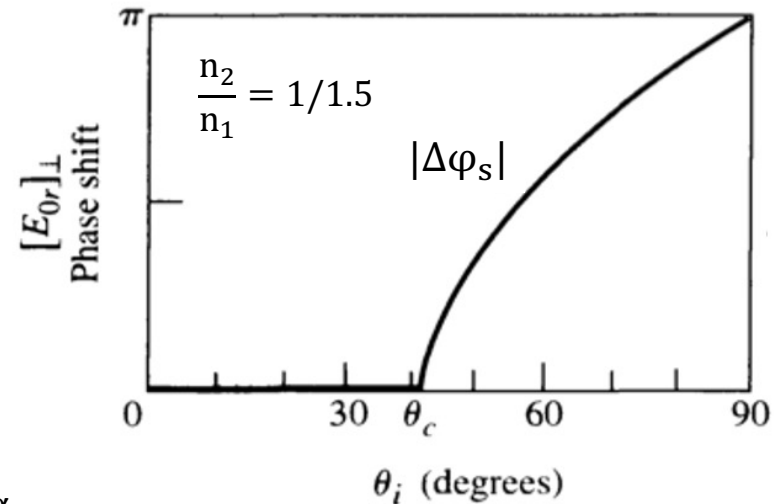
(a) When $\theta_1 < \theta_c$

$r_s > 0 \rightarrow \Delta\varphi = 0$

(b) When $\theta_1 > \theta_c$ (total internal reflection)

$$r_s = \frac{n_1 \cos\theta_1 - in_2\sqrt{(\sin\theta_2)^2 - 1}}{n_1 \cos\theta_1 + in_2\sqrt{(\sin\theta_2)^2 - 1}} = e^{-i2\alpha_s}$$

$$\Delta\varphi_s = -2\alpha_s = -2\tan^{-1}\left(\frac{n_2\sqrt{(\sin\theta_2)^2 - 1}}{n_1 \cos\theta_1}\right) = -2\tan^{-1}\left(\frac{\sqrt{(n_1 \sin\theta_1)^2 - n_2^2}}{n_1 \cos\theta_1}\right)$$

Phase Change in Reflection

Case II: $n_1 > n_2, \ \theta_1 < \theta_2$

(2) p-polarisation $\quad r_p = \dfrac{\tan(\theta_1 - \theta_2)}{\tan(\theta_1 + \theta_2)}$

(a) When $\theta_1 < \theta_c$
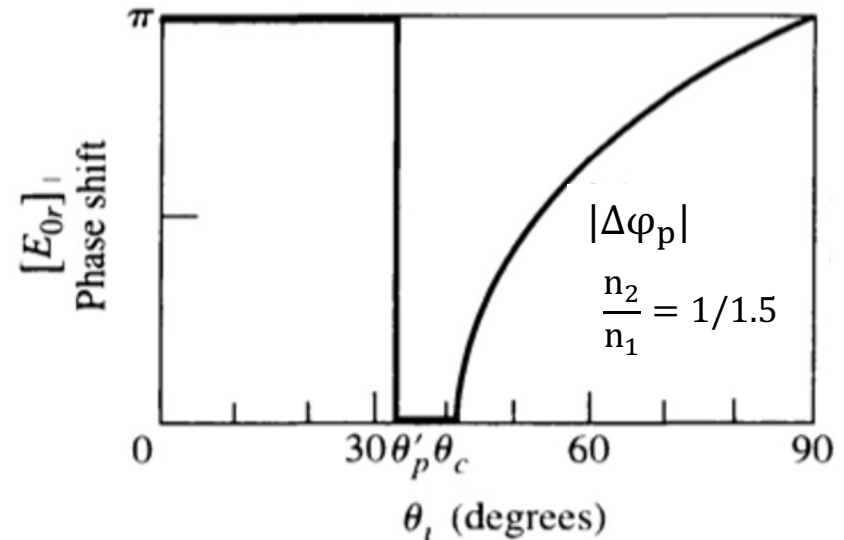
When $\theta_1 < \theta_b, \qquad r_p < 0 \rightarrow \Delta\varphi = \pi$

When $\theta_1 > \theta_b, \qquad r_p > 0 \rightarrow \Delta\varphi = 0$

(b) When $\theta_1 > \theta_c$ (total internal reflection)

$r_p = \dfrac{n_2 \cos\theta_1 - i n_1 \sqrt{(\sin\theta_2)^2 - 1}}{n_2 \cos\theta_1 + i n_1 \sqrt{(\sin\theta_2)^2 - 1}} = e^{-i2\alpha_p}$

$\Delta\varphi_p = -2\alpha_p = -2\tan^{-1}\left(\dfrac{n_1\sqrt{(\sin\theta_2)^2 - 1}}{n_2 \cos\theta_1}\right) = -2\tan^{-1}\left(\dfrac{n_1\sqrt{(n_1 \sin\theta_1)^2 - n_2^2}}{n_2^2 \cos\theta_1}\right)$

$|\Delta\varphi_p|$

$\dfrac{n_2}{n_1} = 1/1.5$

$[E_{0r}]_i$ Phase shift

$0 \qquad 30 \ \theta'_p, \theta_c \qquad 60 \qquad 90$

θ_i (degrees)

Phase Change in Transmission

$$t_p = \frac{2n_1 \cos\theta_1}{n_2 \cos\theta_1 + n_1 \cos\theta_2} > 0$$

$$t_s = \frac{2n_1 \cos\theta_1}{n_1 \cos\theta_1 + n_2 \cos\theta_2} > 0$$

Zero phase change of transmitted fields

45° Phase Difference

Knowing the phase change in reflection and transmission has significant implications in many applications, such as anti-reflection coating, interferometers, polarimetry, ellipsometry etc.
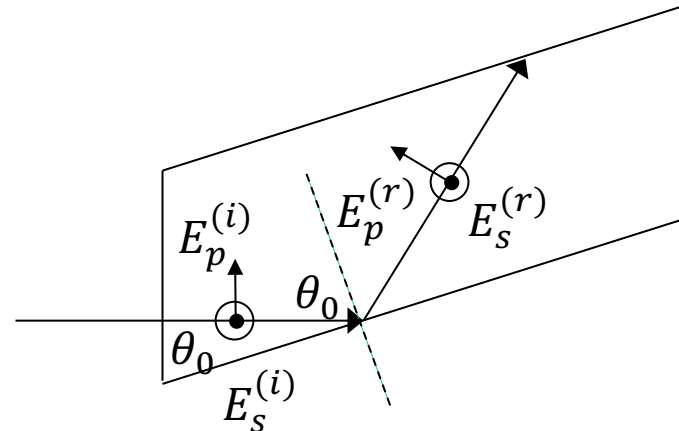
One of the applications of phase change in TIR is to construct phase retarders. Of particular importance is the incident angle θ_0 where the phase difference between p- and s- polarization is $45°$.

$$\delta(\theta_0) = \Delta\varphi_p - \Delta\varphi_s = \frac{\pi}{4}$$

$$2\tan^{-1}\left(\frac{\sqrt{(n_1\sin\theta_0)^2 - n_2^2}}{n_1\cos\theta_0}\right) - 2\tan^{-1}\left(\frac{n_1\sqrt{(n_1\sin\theta_0)^2 - n_2^2}}{n_2^2\cos\theta_0}\right) = \frac{\pi}{4}$$

For example: $n_1 = 1.5, n_2 = 1$

$\theta_0 = 50.2°$ or $53.3°$

Fresnel Rhomb

One TIR at θ_0 induces 45° phase change, two TIR will induce 90° phase change (equivalent to a quarter waveplate), …four TIR will induce 180° phase change (equivalent to a half waveplate).
A slab of crystal is cut to a tilt angle of θ_0. Light incident normal to the surface undergo TIR inside the crystal will induce the desired phase change. Such device is called Fresnel rhomb.

Quarter-wave Fresnel rhomb retarder   Half-wave Fresnel rhomb retarder
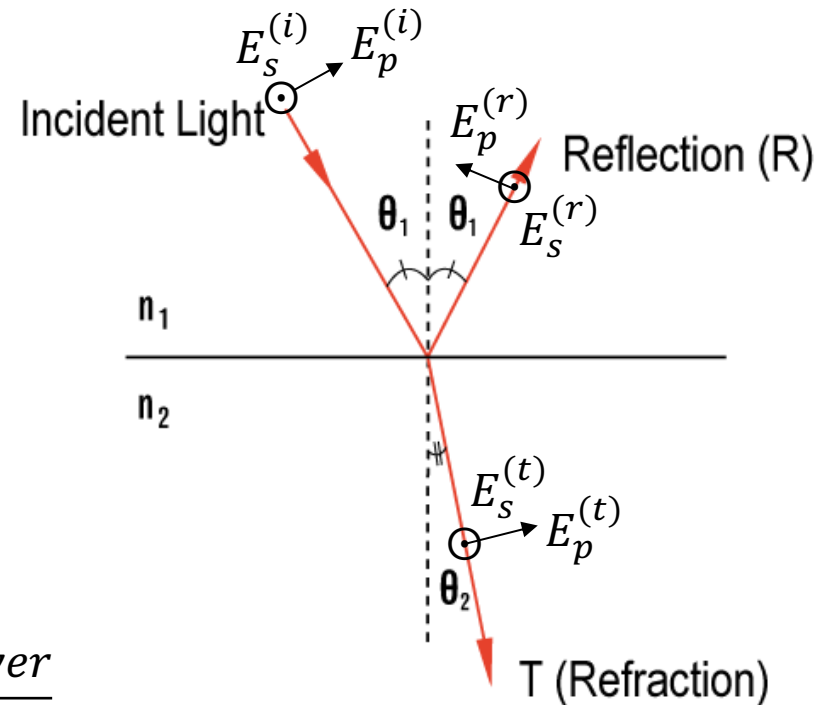
Transmittance

Transmittivity

$$t_p = \frac{E_p^{(t)}}{E_p^{(i)}} = \frac{2n_1 \cos \theta_1}{n_2 \cos \theta_1 + n_1 \cos \theta_2}$$

$$t_s = \frac{E_s^{(t)}}{E_s^{(i)}} = \frac{2n_1 \cos \theta_1}{n_1 \cos \theta_1 + n_2 \cos \theta_2}$$

$$transmittance(T) = \frac{transmitted\ power}{incident\ power}$$

$$transmittance(T) \neq |transmittivity|^2$$

Because the refracted angle θ_2 is different from that of incident angle θ_1, and the two media have different refractive indexes.

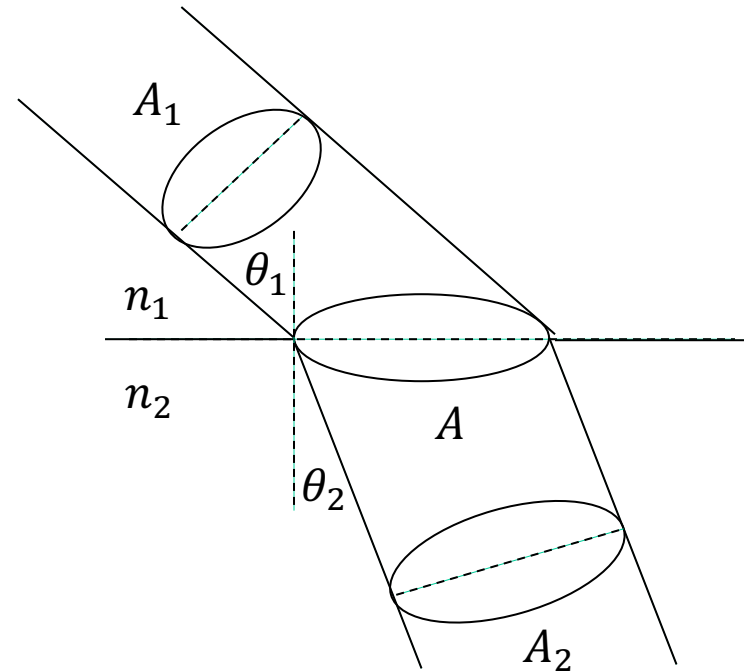# Transmittance

Poynting vector: energy flow across unit area in unit time

$$S = E \times H$$

$$H = \frac{nE}{\eta_0} \qquad \eta_0 = \sqrt{\frac{\mu_0}{\varepsilon_0}} = 377\Omega, \text{ impedance}$$

of vacuum

$$S = \frac{nE^2}{\eta_0} \quad \text{Magnitude of Poynting vector}$$

$$A_1 = A \cos\theta_1 \qquad A_2 = A\cos\theta_2$$

Incident power $P_i = S_1 A_1 = \dfrac{n_1 A \cos\theta_1 |E^{(i)}|^2}{\eta_0}$

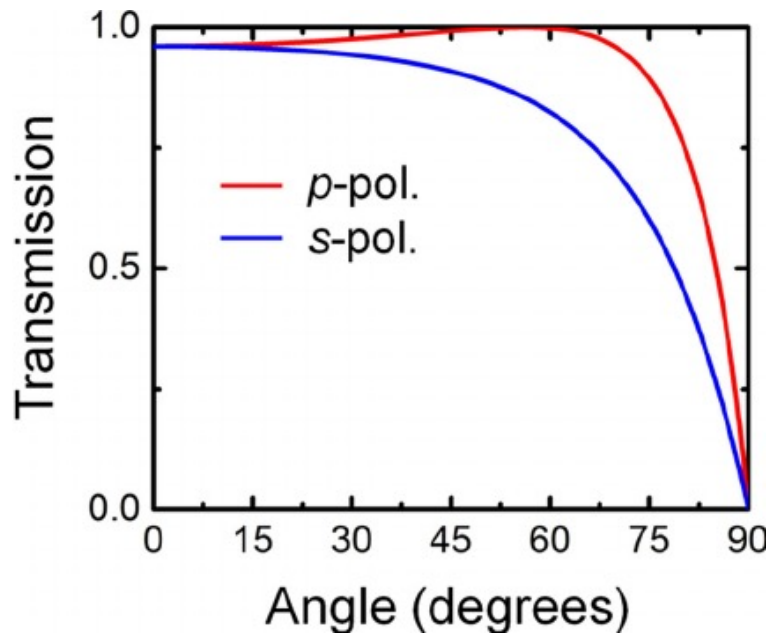Transmitted power $P_t = S_2 A_2 = \dfrac{n_2 A\cos\theta_2 |E^{(t)}|^2}{\eta_0}$

Transmittance

$$T = \frac{P_t}{P_i} = \frac{n_2 \cos\theta_2}{n_1 \cos\theta_1}|t|^2$$

Transmittance

Energy conservation law requires:

$$reflectance\ (R) + transmittance(T) = 1$$

$$T = 1 - R$$

Transmittance of light through a dielectric with refractive index of 1.5 as a function of incident angle