

## 1. Description


### 1.1. Project

Project Name	ADC_IT
Board Name	custom
Generated with:	STM32CubeMX 4.27.0
Date	11/13/2018

### 1.2. MCU

MCU Series	STM32F4
MCU Line	STM32F407/417
MCU name	STM32F407VGTx
MCU Package	LQFP100
MCU Pin number	100

## 2. Pinout Configuration

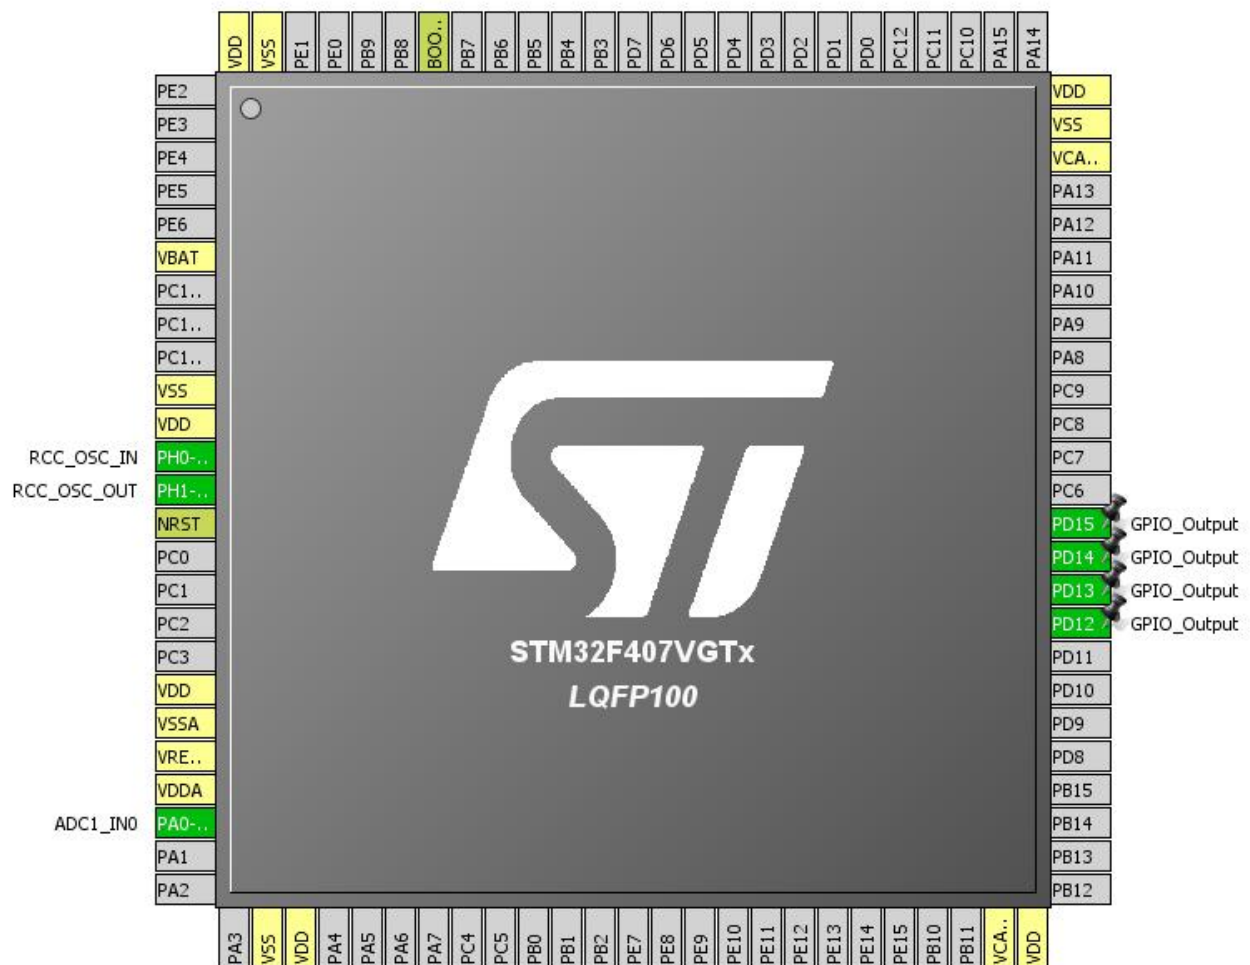


### 3. Pins Configuration

Pin Number LQFP100	Pin Name (function after reset)	Pin Type	Alternate Function(s)	Label
6	VBAT	Power		
10	VSS	Power		
11	VDD	Power		
12	PH0-OSC_IN	I/O	RCC_OSC_IN	
13	PH1-OSC_OUT	I/O	RCC_OSC_OUT	
14	NRST	Reset		
19	VDD	Power		
20	VSSA	Power		
21	VREF+	Power		
22	VDDA	Power		
23	PA0-WKUP	I/O	ADC1_IN0	
27	VSS	Power		
28	VDD	Power		
49	VCAP_1	Power		
50	VDD	Power		
59	PD12 *	I/O	GPIO_Output	
60	PD13 *	I/O	GPIO_Output	
61	PD14 *	I/O	GPIO_Output	
62	PD15 *	I/O	GPIO_Output	
73	VCAP_2	Power		
74	VSS	Power		
75	VDD	Power		
94	BOOT0	Boot		
99	VSS	Power		
100	VDD	Power		

\* The pin is affected with an I/O function

## 4. Clock Tree Configuration

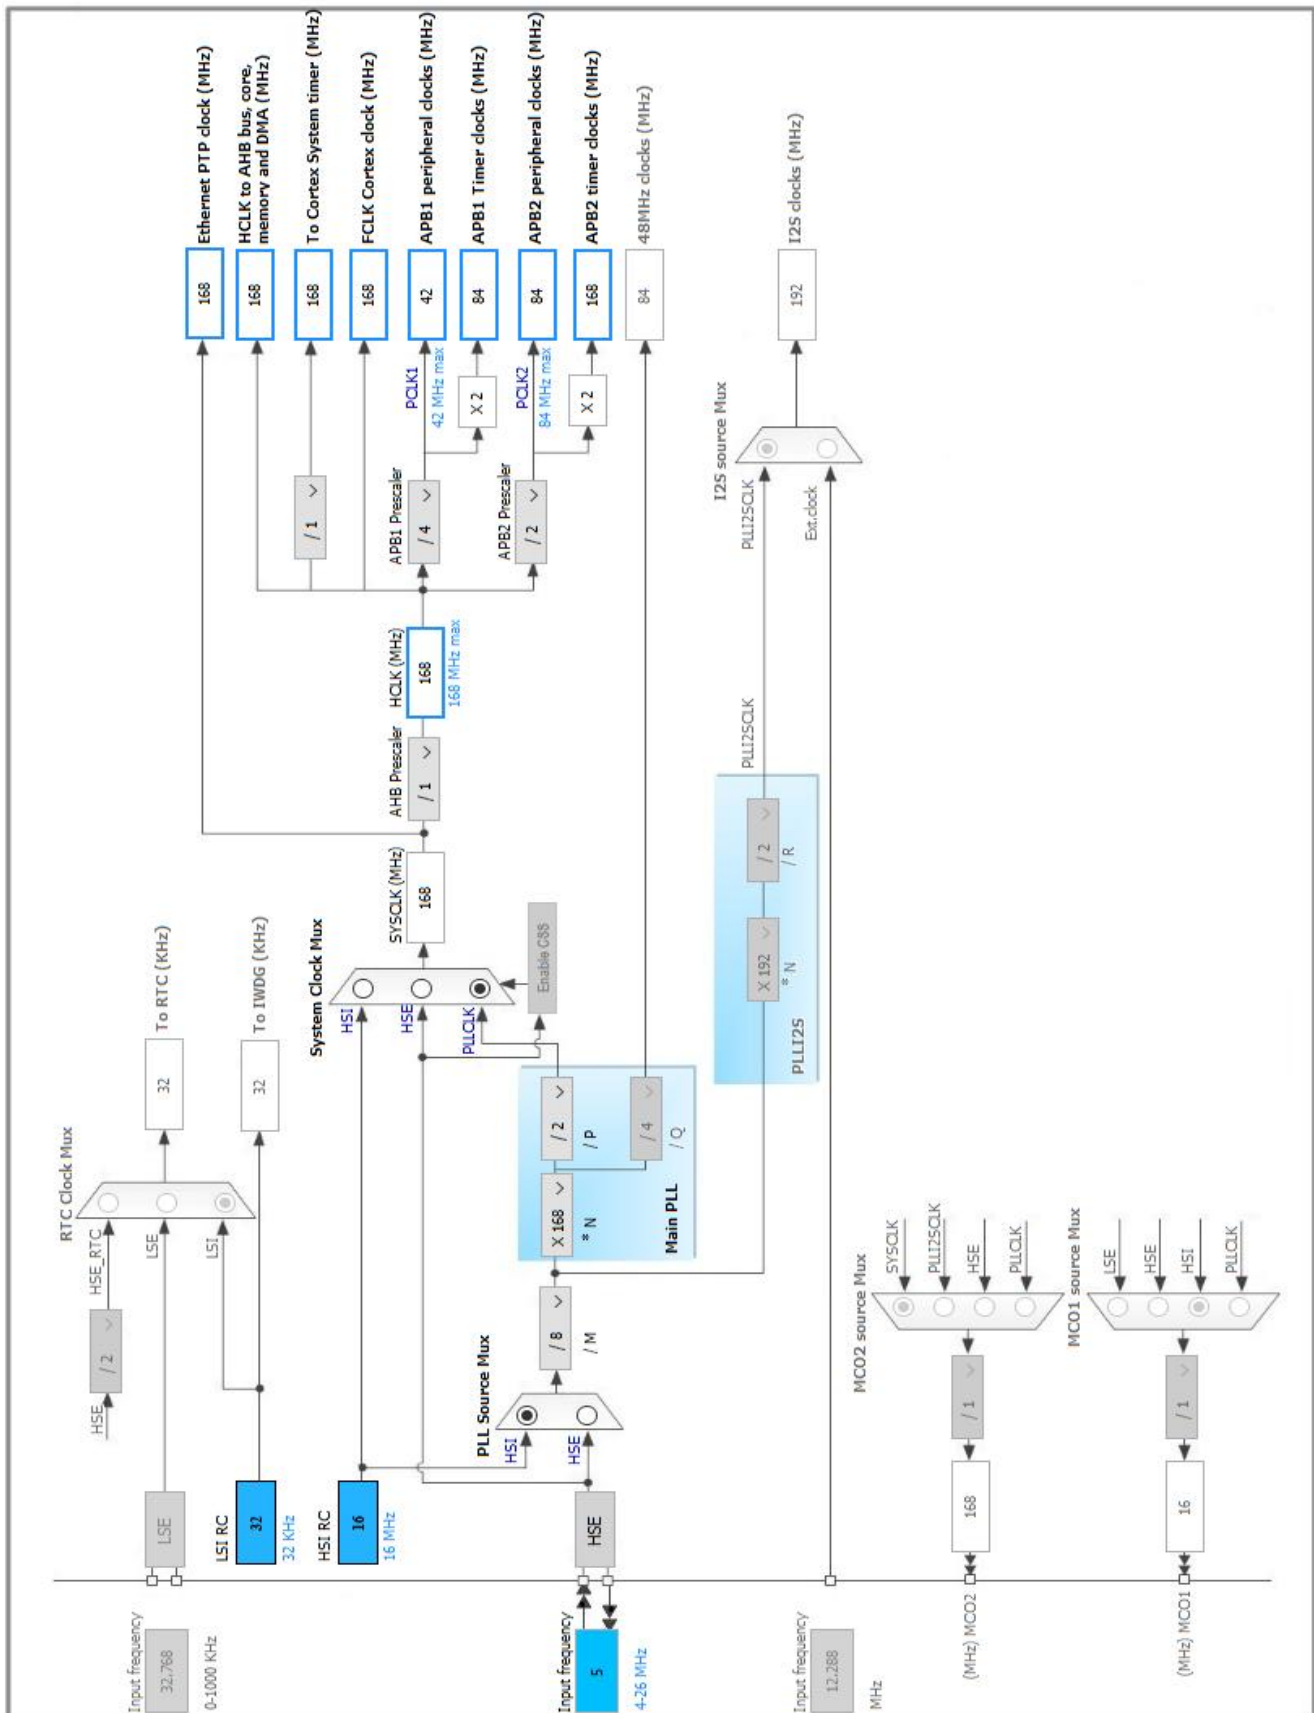

## 5. IPs and Middleware Configuration

### 5.1. ADC1

mode: IN0

#### 5.1.1. Parameter Settings:

##### ADCs\_Common\_Settings:

Mode Independent mode

##### ADC\_Settings:

Clock Prescaler PCLK2 divided by 4

Resolution 12 bits (15 ADC Clock cycles)

Data Alignment Right alignment

Scan Conversion Mode Disabled

Continuous Conversion Mode **Enabled \***

Discontinuous Conversion Mode Disabled

DMA Continuous Requests Disabled

End Of Conversion Selection **EOC flag at the end of all conversions \***

##### ADC\_Regular\_ConversionMode:

Number Of Conversion 1

External Trigger Conversion Source Regular Conversion launched by software

External Trigger Conversion Edge None

Rank 1

Channel Channel 0

Sampling Time 3 Cycles

##### ADC\_Injected\_ConversionMode:

Number Of Conversions 0

##### WatchDog:

Enable Analog WatchDog Mode false

### 5.2. RCC

#### High Speed Clock (HSE): Crystal/Ceramic Resonator

##### 5.2.1. Parameter Settings:

##### System Parameters:

VDD voltage (V) 3.3

Instruction Cache Enabled

Prefetch Buffer Enabled

Data Cache Enabled

Flash Latency(WS) 5 WS (6 CPU cycle)

**RCC Parameters:**

HSI Calibration Value 16

HSE Startup Timeout Value (ms) 100

LSE Startup Timeout Value (ms) 5000

**Power Parameters:**

Power Regulator Voltage Scale Power Regulator Voltage Scale 1

## 5.3. SYS

**Timebase Source: SysTick**

\* User modified value

## 6. System Configuration

### 6.1. GPIO configuration

IP	Pin	Signal	GPIO mode	GPIO pull/up pull down	Max Speed	User Label
ADC1	PA0-WKUP	ADC1_IN0	Analog mode	No pull-up and no pull-down	n/a	
RCC	PH0-OSC_IN	RCC_OSC_IN	n/a	n/a	n/a	
	PH1-OSC_OUT	RCC_OSC_OUT	n/a	n/a	n/a	
GPIO	PD12	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	
	PD13	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	
	PD14	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	
	PD15	GPIO_Output	Output Push Pull	No pull-up and no pull-down	Low	

### 6.2. DMA configuration

nothing configured in DMA service

### 6.3. NVIC configuration

Interrupt Table	Enable	Preenmption Priority	SubPriority
Non maskable interrupt	true	0	0
Hard fault interrupt	true	0	0
Memory management fault	true	0	0
Pre-fetch fault, memory access fault	true	0	0
Undefined instruction or illegal state	true	0	0
System service call via SWI instruction	true	0	0
Debug monitor	true	0	0
Pendable request for system service	true	0	0
System tick timer	true	0	0
ADC1, ADC2 and ADC3 global interrupts	true	0	0
PVD interrupt through EXTI line 16	unused		
Flash global interrupt	unused		
RCC global interrupt	unused		
FPU global interrupt	unused		

\* User modified value



## **7. Power Consumption Calculator report**

### 7.1. Microcontroller Selection

Series	STM32F4
Line	STM32F407/417
MCU	STM32F407VGTx
Datasheet	022152_Rev8

### 7.2. Parameter Selection

Temperature	25
Vdd	3.3

## 8. Software Project

### 8.1. Project Settings

Name	Value
Project Name	ADC_IT
Project Folder	D:\Projeler\STM32F4_Discovery\CubeMX_HAL\ADC_IT
Toolchain / IDE	MDK-ARM V5
Firmware Package Name and Version	STM32Cube FW_F4 V1.21.0

### 8.2. Code Generation Settings

Name	Value
STM32Cube Firmware Library Package	Copy only the necessary library files
Generate peripheral initialization as a pair of '.c/.h' files	No
Backup previously generated files when re-generating	No
Delete previously generated files when not re-generated	Yes
Set all free pins as analog (to optimize the power consumption)	No

## ***9. Software Pack Report***