

## 1. Description


### 1.1. Project

Project Name	PWM
Board Name	custom
Generated with:	STM32CubeMX 4.27.0
Date	11/05/2018

### 1.2. MCU

MCU Series	STM32F4
MCU Line	STM32F407/417
MCU name	STM32F407VGTx
MCU Package	LQFP100
MCU Pin number	100


## 2. Pinout Configuration

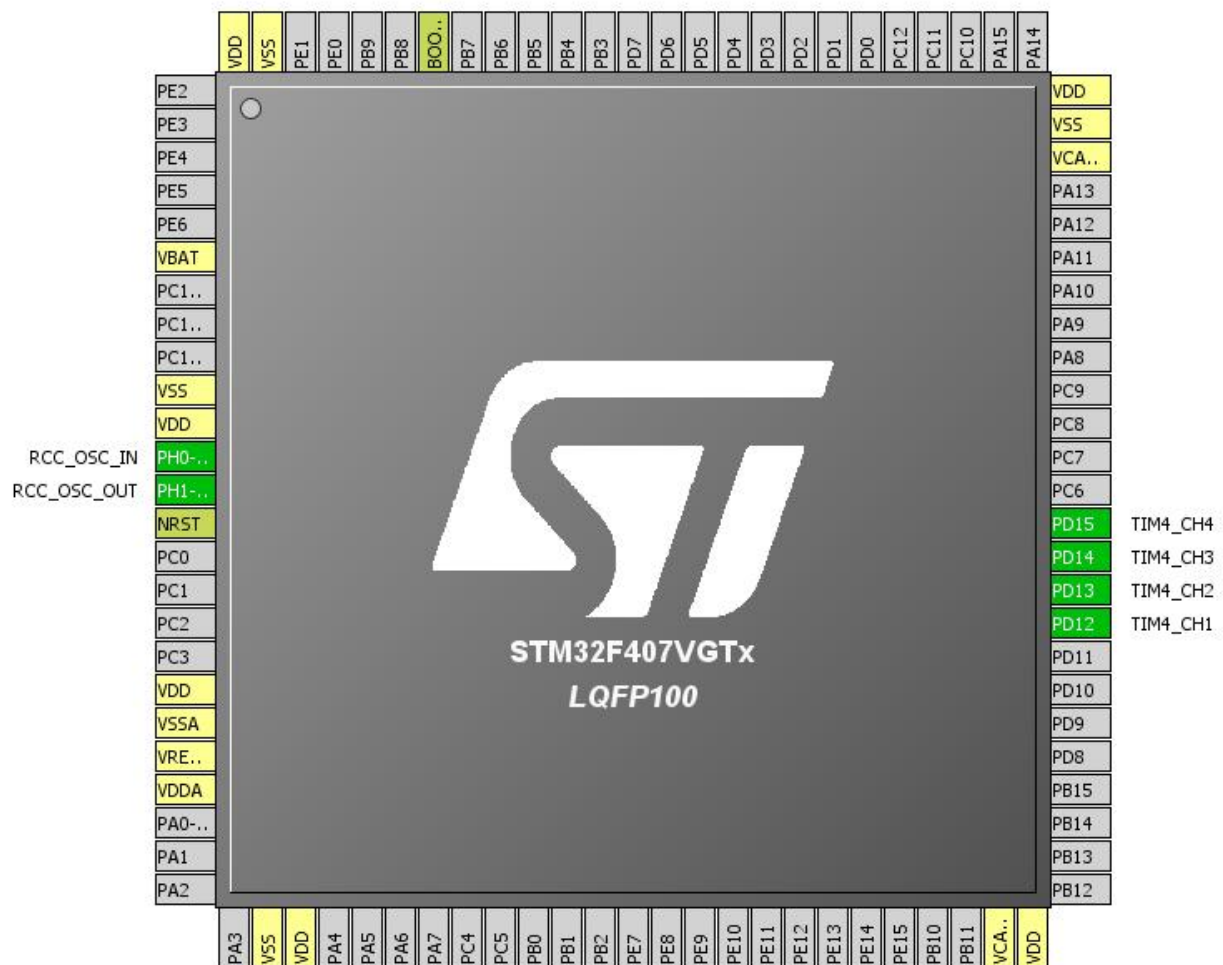

### 3. Pins Configuration

Pin Number LQFP100	Pin Name (function after reset)	Pin Type	Alternate Function(s)	Label
6	VBAT	Power		
10	VSS	Power		
11	VDD	Power		
12	PH0-OSC_IN	I/O	RCC_OSC_IN	
13	PH1-OSC_OUT	I/O	RCC_OSC_OUT	
14	NRST	Reset		
19	VDD	Power		
20	VSSA	Power		
21	VREF+	Power		
22	VDDA	Power		
27	VSS	Power		
28	VDD	Power		
49	VCAP_1	Power		
50	VDD	Power		
59	PD12	I/O	TIM4_CH1	
60	PD13	I/O	TIM4_CH2	
61	PD14	I/O	TIM4_CH3	
62	PD15	I/O	TIM4_CH4	
73	VCAP_2	Power		
74	VSS	Power		
75	VDD	Power		
94	BOOT0	Boot		
99	VSS	Power		
100	VDD	Power		

## 4. Clock Tree Configuration

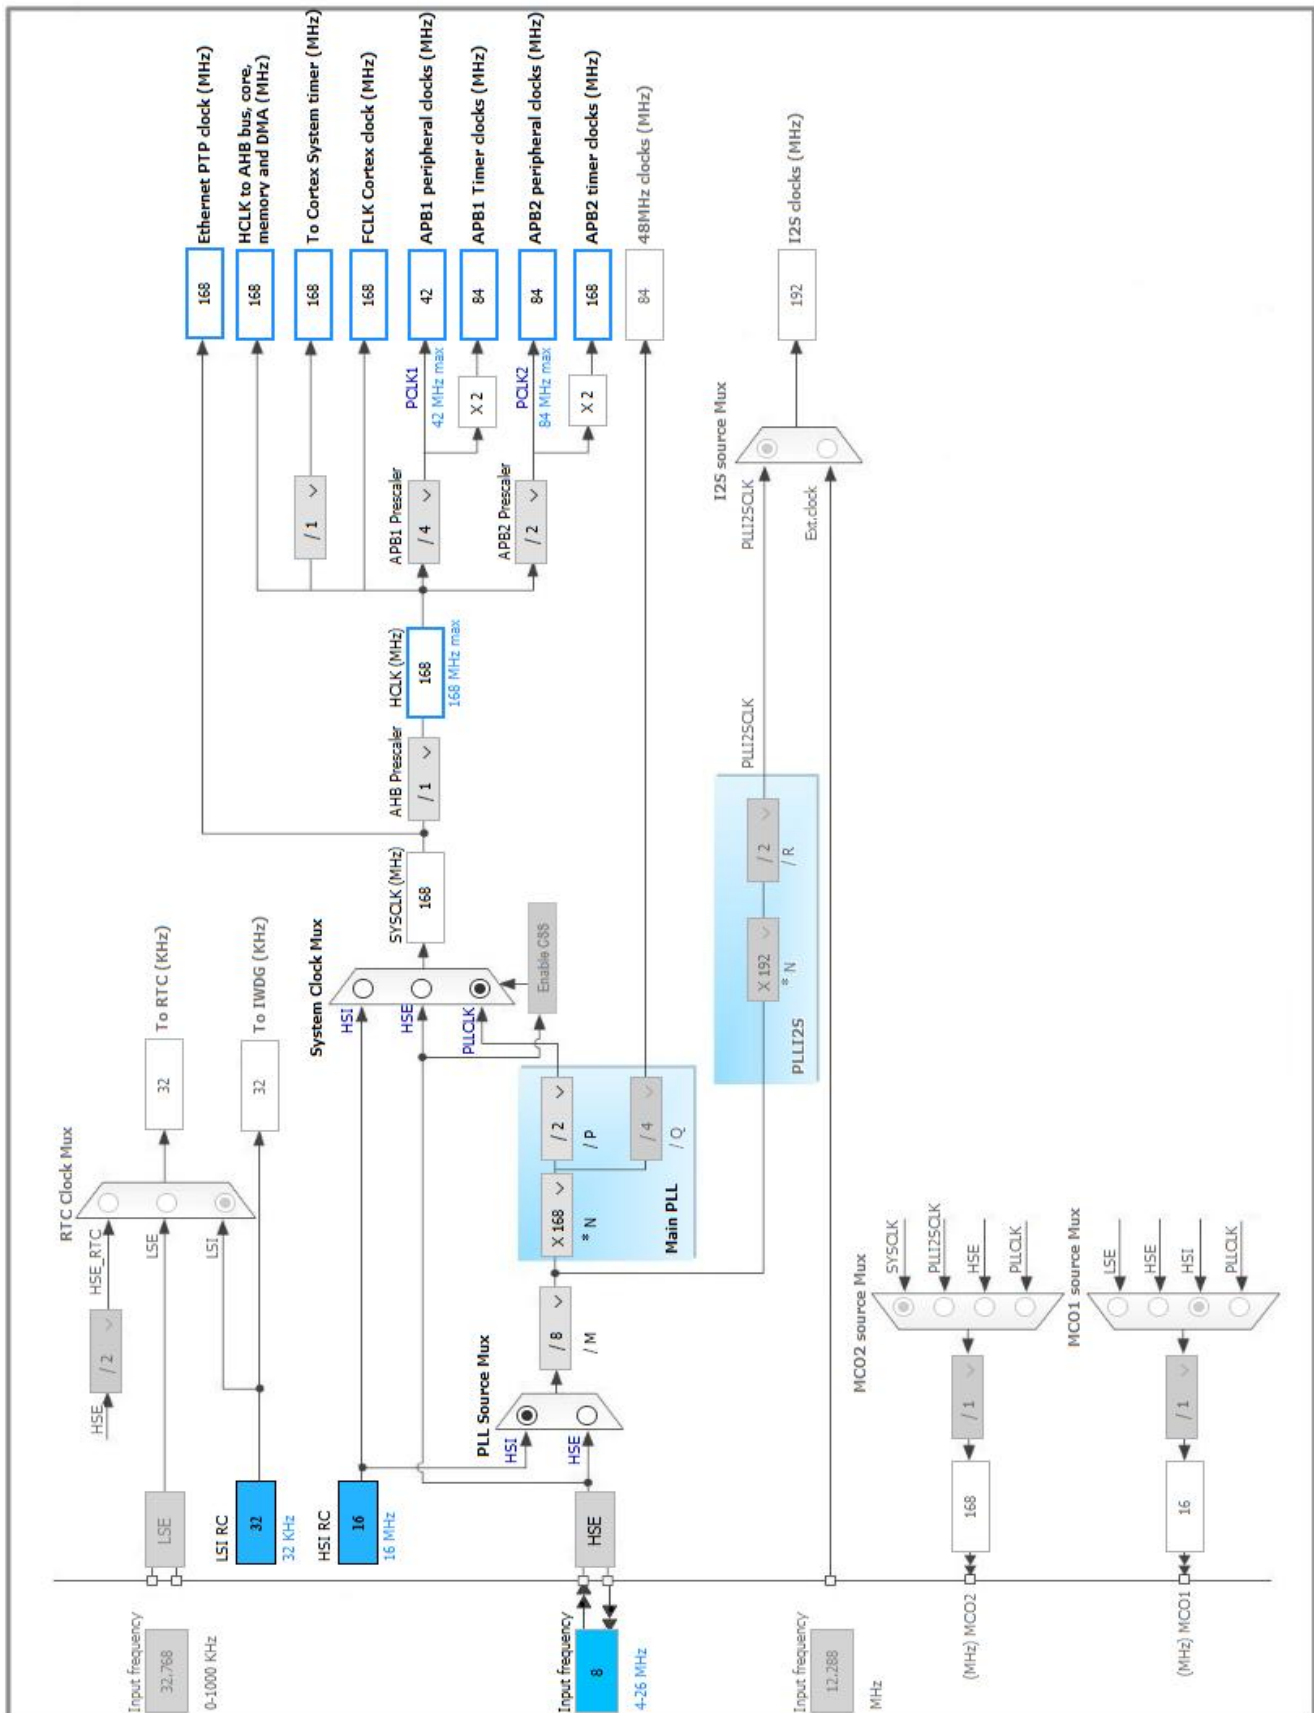

## 5. IPs and Middleware Configuration

### 5.1. RCC

#### High Speed Clock (HSE): Crystal/Ceramic Resonator

##### 5.1.1. Parameter Settings:

###### System Parameters:

VDD voltage (V)	3.3
Instruction Cache	Enabled
Prefetch Buffer	Enabled
Data Cache	Enabled
Flash Latency(WS)	5 WS (6 CPU cycle)

###### RCC Parameters:

HSI Calibration Value	16
HSE Startup Timeout Value (ms)	100
LSE Startup Timeout Value (ms)	5000

###### Power Parameters:

Power Regulator Voltage Scale	Power Regulator Voltage Scale 1
-------------------------------	---------------------------------

### 5.2. SYS

#### Timebase Source: SysTick

### 5.3. TIM4

#### Clock Source : Internal Clock

#### Channel1: PWM Generation CH1

#### Channel2: PWM Generation CH2

#### Channel3: PWM Generation CH3

#### Channel4: PWM Generation CH4

##### 5.3.1. Parameter Settings:

###### Counter Settings:

Prescaler (PSC - 16 bits value)	42000 - 1 *
Counter Mode	Up
Counter Period (AutoReload Register - 16 bits value )	2000 - 1 *
Internal Clock Division (CKD)	No Division

###### Trigger Output (TRGO) Parameters:

Master/Slave Mode (MSM bit)	Disable (Trigger input effect not delayed)
-----------------------------	--

Trigger Event Selection

Reset (UG bit from TIMx\_EGR)

**PWM Generation Channel 1:**

Mode

PWM mode 1

Pulse (16 bits value)

0

Fast Mode

Disable

CH Polarity

High

**PWM Generation Channel 2:**

Mode

PWM mode 1

Pulse (16 bits value)

0

Fast Mode

Disable

CH Polarity

High

**PWM Generation Channel 3:**

Mode

PWM mode 1

Pulse (16 bits value)

0

Fast Mode

Disable

CH Polarity

High

**PWM Generation Channel 4:**

Mode

PWM mode 1

Pulse (16 bits value)

0

Fast Mode

Disable

CH Polarity

High

\* User modified value

## 6. System Configuration

### 6.1. GPIO configuration

IP	Pin	Signal	GPIO mode	GPIO pull/up pull down	Max Speed	User Label
RCC	PH0-OSC_IN	RCC_OSC_IN	n/a	n/a	n/a	
	PH1-OSC_OUT	RCC_OSC_OUT	n/a	n/a	n/a	
TIM4	PD12	TIM4_CH1	Alternate Function Push Pull	No pull-up and no pull-down	Low	
	PD13	TIM4_CH2	Alternate Function Push Pull	No pull-up and no pull-down	Low	
	PD14	TIM4_CH3	Alternate Function Push Pull	No pull-up and no pull-down	Low	
	PD15	TIM4_CH4	Alternate Function Push Pull	No pull-up and no pull-down	Low	

### 6.2. DMA configuration

nothing configured in DMA service

### 6.3. NVIC configuration

Interrupt Table	Enable	Preenmption Priority	SubPriority
Non maskable interrupt	true	0	0
Hard fault interrupt	true	0	0
Memory management fault	true	0	0
Pre-fetch fault, memory access fault	true	0	0
Undefined instruction or illegal state	true	0	0
System service call via SWI instruction	true	0	0
Debug monitor	true	0	0
Pendable request for system service	true	0	0
System tick timer	true	0	0
PVD interrupt through EXTI line 16	unused		
Flash global interrupt	unused		
RCC global interrupt	unused		
TIM4 global interrupt	unused		
FPU global interrupt	unused		

\* User modified value



## 7. Power Consumption Calculator report

### 7.1. Microcontroller Selection

Series	STM32F4
Line	STM32F407/417
MCU	STM32F407VGTx
Datasheet	022152_Rev8

### 7.2. Parameter Selection

Temperature	25
Vdd	3.3

## 8. Software Project

### 8.1. Project Settings

Name	Value
Project Name	PWM
Project Folder	D:\Projeler\STM32F4_Discovery\CubeMX_HAL\PWM
Toolchain / IDE	MDK-ARM V5
Firmware Package Name and Version	STM32Cube FW_F4 V1.21.0

### 8.2. Code Generation Settings

Name	Value
STM32Cube Firmware Library Package	Copy only the necessary library files
Generate peripheral initialization as a pair of '.c/.h' files	No
Backup previously generated files when re-generating	No
Delete previously generated files when not re-generated	Yes
Set all free pins as analog (to optimize the power consumption)	No

## ***9. Software Pack Report***