

classified as "banned" or "restricted" according to the  
specific amendments

Classification of req. and doc. ~~544 10 14 -01~~

Surface texture: SS 672 (Ra)

Rv	Zone	Description of revision	Rev by	Date	T M
A	.	Drawing for supply	MPr	051103	026/00049
.	.	.	.	.	.
.	.	.	.	.	.
.	.	.	.	.	.
.	.	.	.	.	.
.	.	.	.	.	.

Tolerancing: SS-ISO 8015.  
Geometrical tol: SS-ISO 1101.  
Max. material principle:  
SS-ISO 2692  
Tolerances unless otherwise  
specified  
acc:


DIN 2095 Gg 3

The demand of squareness is  
applicable when the spring  
is pressed against plane A  
with screw 503 21 79.

Vinkelrätthetskravet gäller när  
fjädersnären är pressad mot plan A  
med skruv 503 21 79.

2025-03-25 KaAn  
Intern uppdatering av ytbehandling  
Zinkfosfat+Passivering  
ZnPh processen utan aktivering

Section view A-A

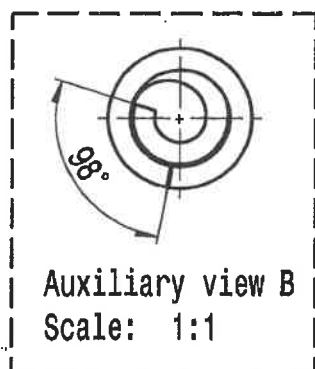

Auxiliary view B  
Scale: 1:1

$\perp \phi 2$  A

$\phi 13.4$

$\phi 6.7 \pm 0.3$

min 0.2

Godkänd för produktion	
EWES art-nr: 27890	
Datum: 051121	Signatur: RW

Right-handed winding.  
Högerlindad.

\* Antal varv: 9.2 st

Tel 051261 Marianne P

Material and treatment

Steel/Stål EN 10270-1-DH (DIN 17223 Sorte D). Annealed/Anlöst

250° 30min. Zinc-phosphated/Zinkfosfaterad 0,005 0,008 mm

	Orig. scale 2:1	Cert. duty 	Photo .	Date 05-05-17	Free .	Part no 544 10 14 -01
	Sign. MPr					Weight 26,4g
	Title SPRING					Compare 503 85 43
	Id.no: 544 10 14					Part of P026
Approved Per					Size A4	Sheet A
					Rev/Ver A	