

classified as "banned" or "restricted" according to the  
specific amendments and to the Business Sector

Classification of req. and doc. ~~503 27 22 10 11~~

Surface texture: SS 672 (Ra)

Rv	Zone	Description of revision	Rev by	Date	T M
A	.	Drawing for supply	MPr	051103	026/00049
.	.	.	.	.	.
.	.	.	.	.	.
.	.	.	.	.	.
.	.	.	.	.	.
.	.	.	.	.	.

Tolerancing: SS-ISO 8015.  
Geometrical tol: SS-ISO 1101.  
Max. material principle:  
SS-ISO 2692  
Tolerances unless otherwise  
specified  
acc:



DIN 2095 Gg 3

The demand of squareness is  
applicable when the spring  
is pressed against plane A  
with screw 503 21 79.

Vinkelrätthetskravet gäller när  
fjädern är pressad mot plan A  
med skruv 503 21 79.

2025-03-25 KaAn  
Intern uppdatering av ytbehandling  
Zinkfosfat+Passivering  
ZnPh processen utan aktivering

Section view A-A

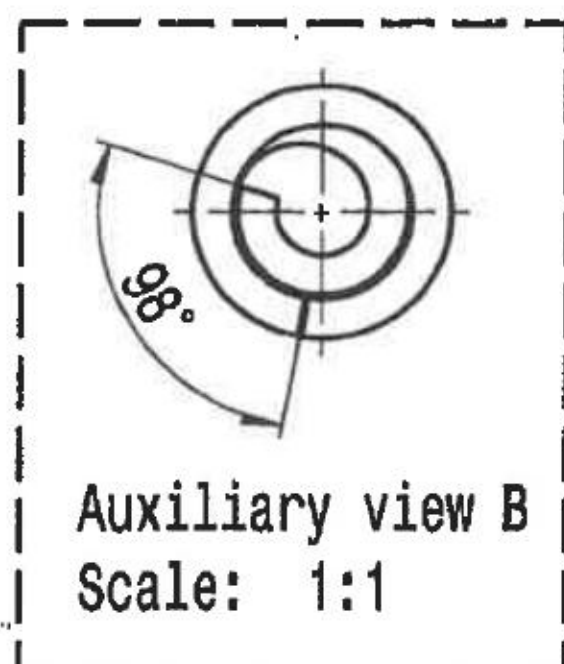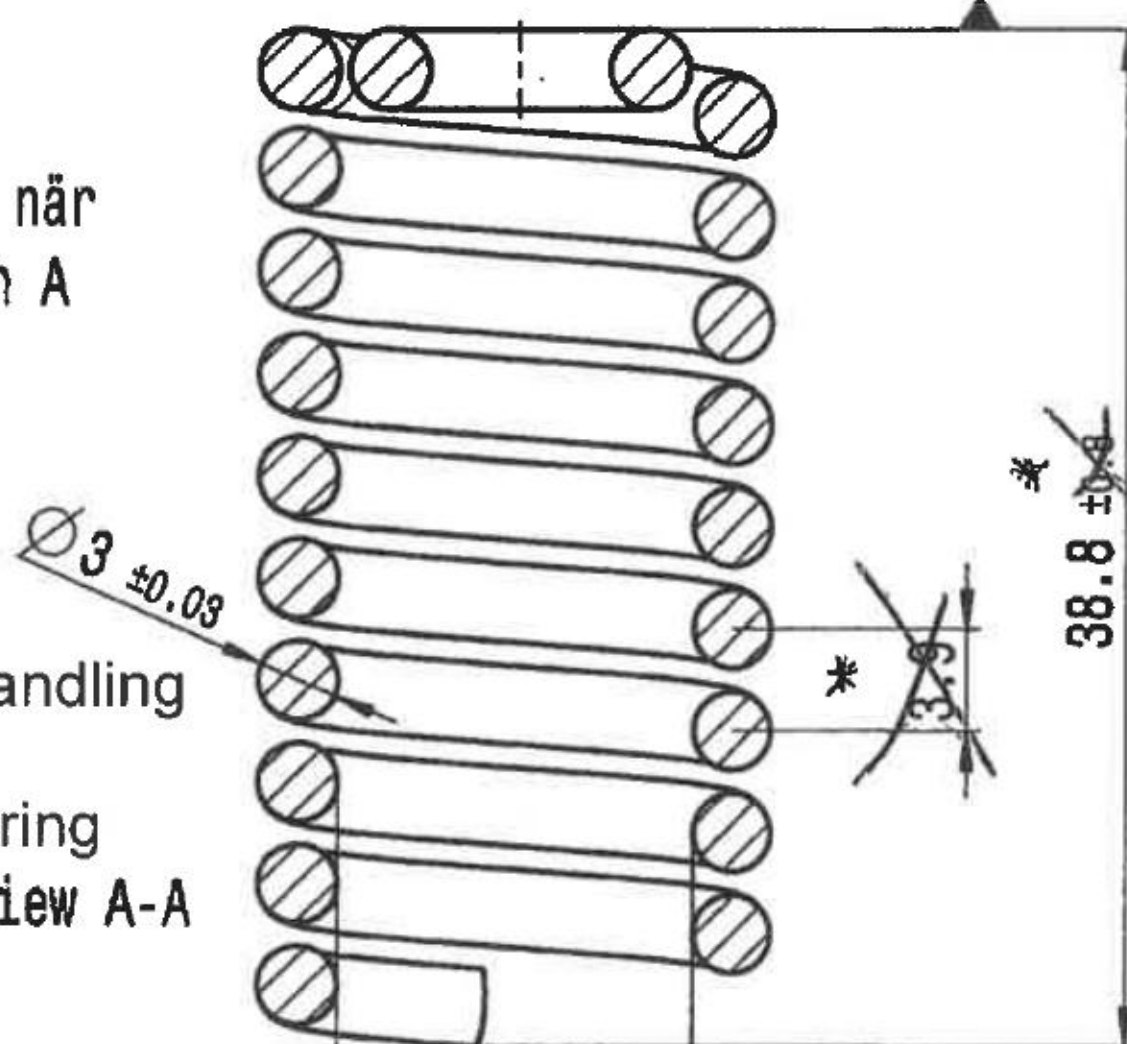

Auxiliary view B  
Scale: 1:1

⊥  $\phi 2$  A

$\phi 13.4$

B

$\phi 6.7 \pm 0.3$

A

A

min 0,2

Godkänd för produktion	
EWES art-nr:	
27890	
Datum:	Signatur:
051121	MP

Right-handed winding.  
Högerlindad.

\* Antal varv: 9,2 st

Tel 0512 01 Marianne P

Material and treatment Steel/Stål EN 10270-1-DH (DIN 17223 Sorte D). Annealed/Anlöst

250° 30min. Zinc-phosphated/Zinkfosfaterad 0,005 0,008 mm

544 10 14 -01	
Part no	
Weight	26,4g
Compare	503 85 43
Part of	P026

Orig. scale	Cert. duty	Photo	Date	Free	Size
2:1	!	.	05-05-17	.	A4
Husqvarna			Sign.	Title	Sheet
This drawing is our property and is returned as requested. It must not be used to the prejudice of our interests.			MPr	SPRING	
			Approved	Id.no:	Rev/Ver
			Per	544 10 14	A