
| SPRIN | G VALUES | | |
|-------------------------|---|--------------|----|
| INSIDE DIAMETER (mm) | 04.26 ± 0.3 mm | (01) | |
| OUTSIDE DIAMETER (mm) | Φ10.4 ±0.25 | 02 | €0 |
| MATERIAL | STAINLESS STEEL 1.4310 - NS ACC. TO: AISI 302 /EN 10270-3/ ISO 6931-1 | | |
| END TYPE | SQUARED | | |
| SPRING RATE (N/mm) | 1.76 | | |
| FREE LENGTH (mm) | 83 ±2 | 03 | |
| ACTUAL SOLID HEIGHT (mm |) 47 | | |
| WIRE LENGTH (mm) | 608 | | |
| WIRE DIAMETER (mm) | Φ1.25 | | |



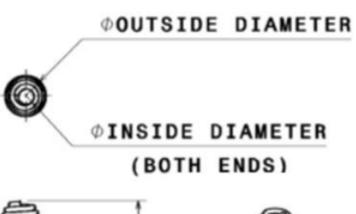

Isometric view