
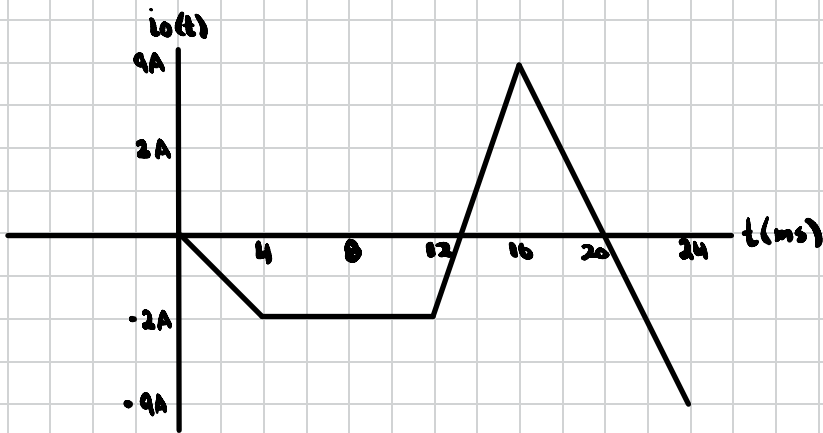


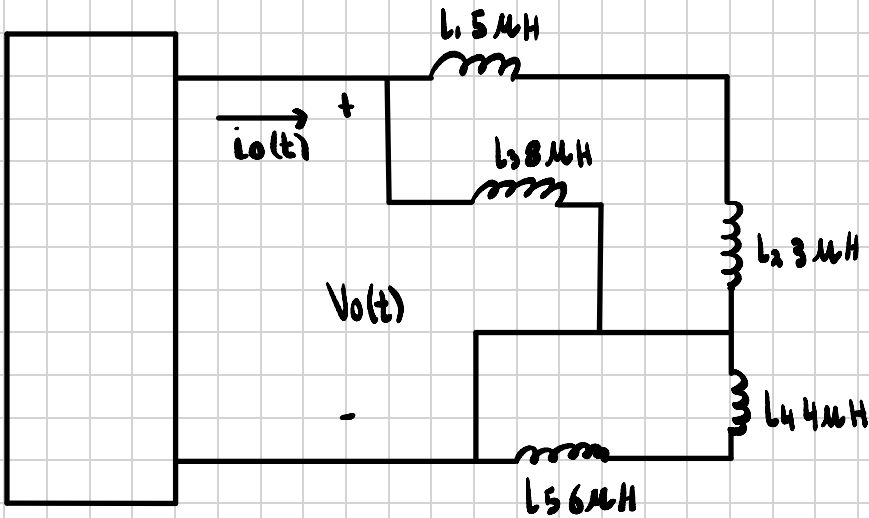

L_4 And L_5 will short

$$L_{eq} = (L_1 + L_2) \parallel L_3$$

$$L_{eq} = (5\mu + 3\mu) \parallel (8\mu)$$

$$L_{eq} = 4\mu\text{H}$$


$$V(t) = L \frac{di}{dt}$$

$$V(t) = (4 \cdot 10^{-6}) \left(\frac{-2}{4 \cdot 10^{-3}} \right) = -2 \text{ mV}$$

$$V(t) = (4 \cdot 10^{-6}) \left(\frac{0}{8 \cdot 10^{-3}} \right) = 0 \text{ V}$$

$$V(t) = (4 \cdot 10^{-6}) \left(\frac{11}{4 \cdot 10^{-6}} \right) = 11 \text{ mV}$$

$$V(t) = (4 \cdot 10^{-6}) \left(\frac{-10}{8 \cdot 10^{-6}} \right) = -9 \text{ mV}$$

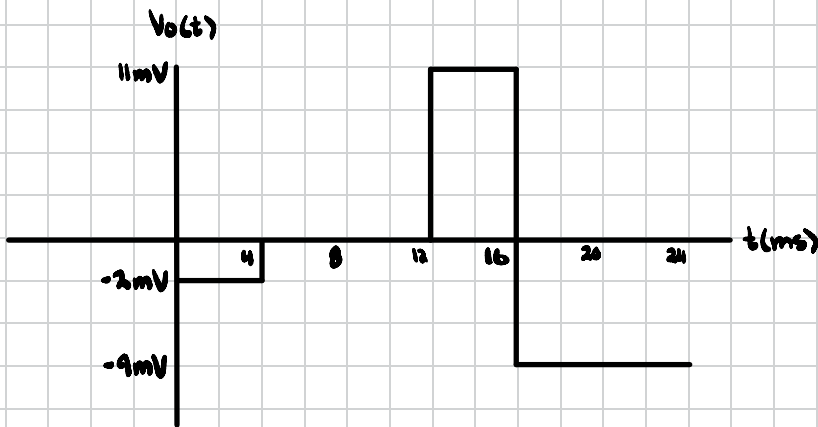

$$(-2 \cdot 10^{-3})(0) = 0 \text{ W}$$

$$(-2 \cdot 10^{-3})(-2) = 4 \text{ mW}$$

$$(0)(-2) = 0 \text{ W}$$

$$(0)(-2) = 0 \text{ W}$$

$$(11 \cdot 10^{-3})(-2) = -22 \text{ mW}$$

$$(11 \cdot 10^{-3})(9) = 99 \text{ mW}$$

$$(-9 \cdot 10^{-3})(9) = -81 \text{ mW}$$

$$(-9 \cdot 10^{-3})(-9) = 81 \text{ mW}$$

