


Model (E)

Instructions: Configure the following Network in image

1- Write Configuration of this network to be **fully connected**

2- Mention

Subnet-mask and Default Gateway of **PC(0)**

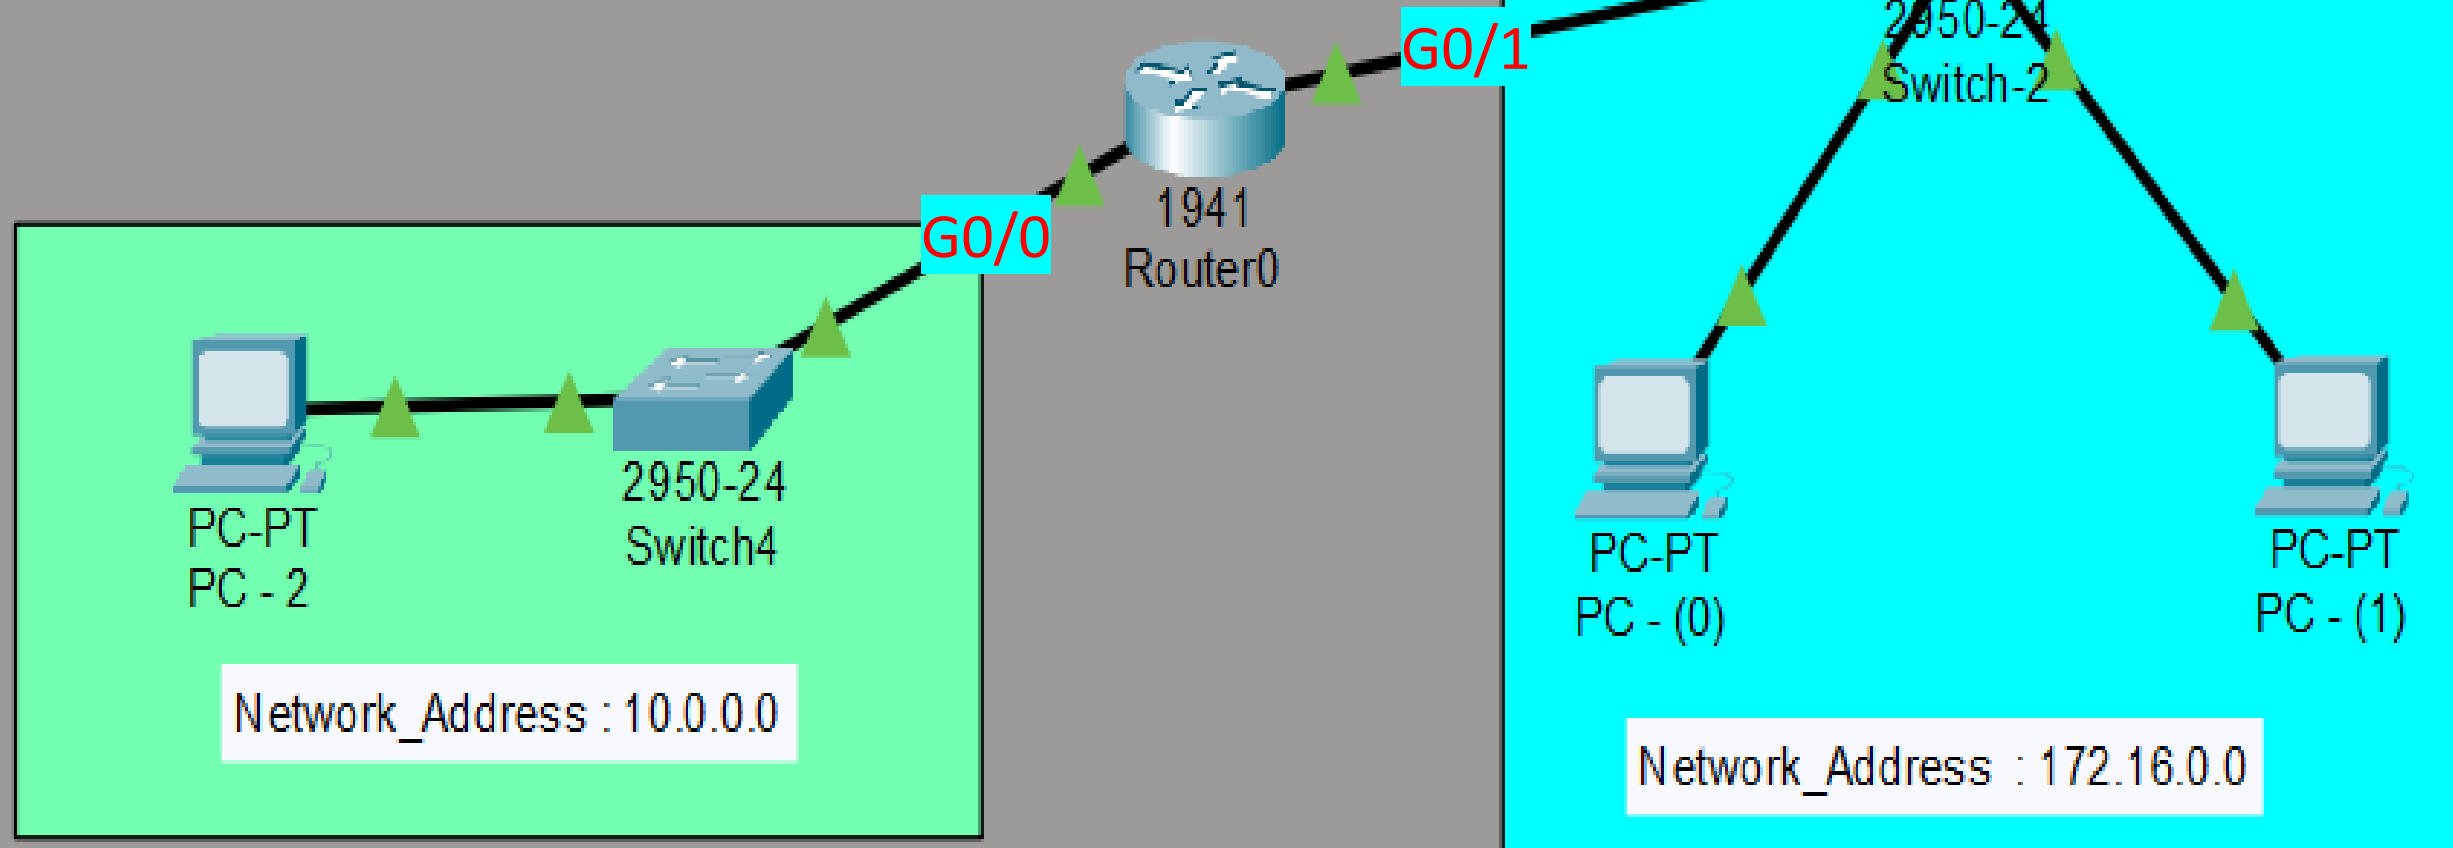

Model Answer (E)

1- Write Configuration of this network to be **fully connected**

PC0: ip address 172.16.0.2 subnet-mask : 255.255.0.0

PC1: ip address 172.16.0.3 subnet-mask : 255.255.0.0

PC2: ip address 10.0.0.2 subnet-mask 255.0.0.0

Router :

Router> en

Router# config terminal

Router(config)# interface G0/0

Router(config-if)# **ip address 10.0.0.1 255.0.0.0**

Router(config)# interface G0/1

Router(config-if)# **ip address 172.16.0.1 255.255.0.0**

2- Mention Subnet-mask and Default Gateway of **PC(0)**

PC0 :subnet mask 255.255.0.0

Default Gateway : 172.16.0.1


Model (F)

Instructions: Configure the following Network in image

1- Write Configuration of this network to be **fully connected**

2- Try check connection between **PC1** and **PC5** after configuration
and write the result

3- Try check connection between **PC4** and **PC6** and write the result.

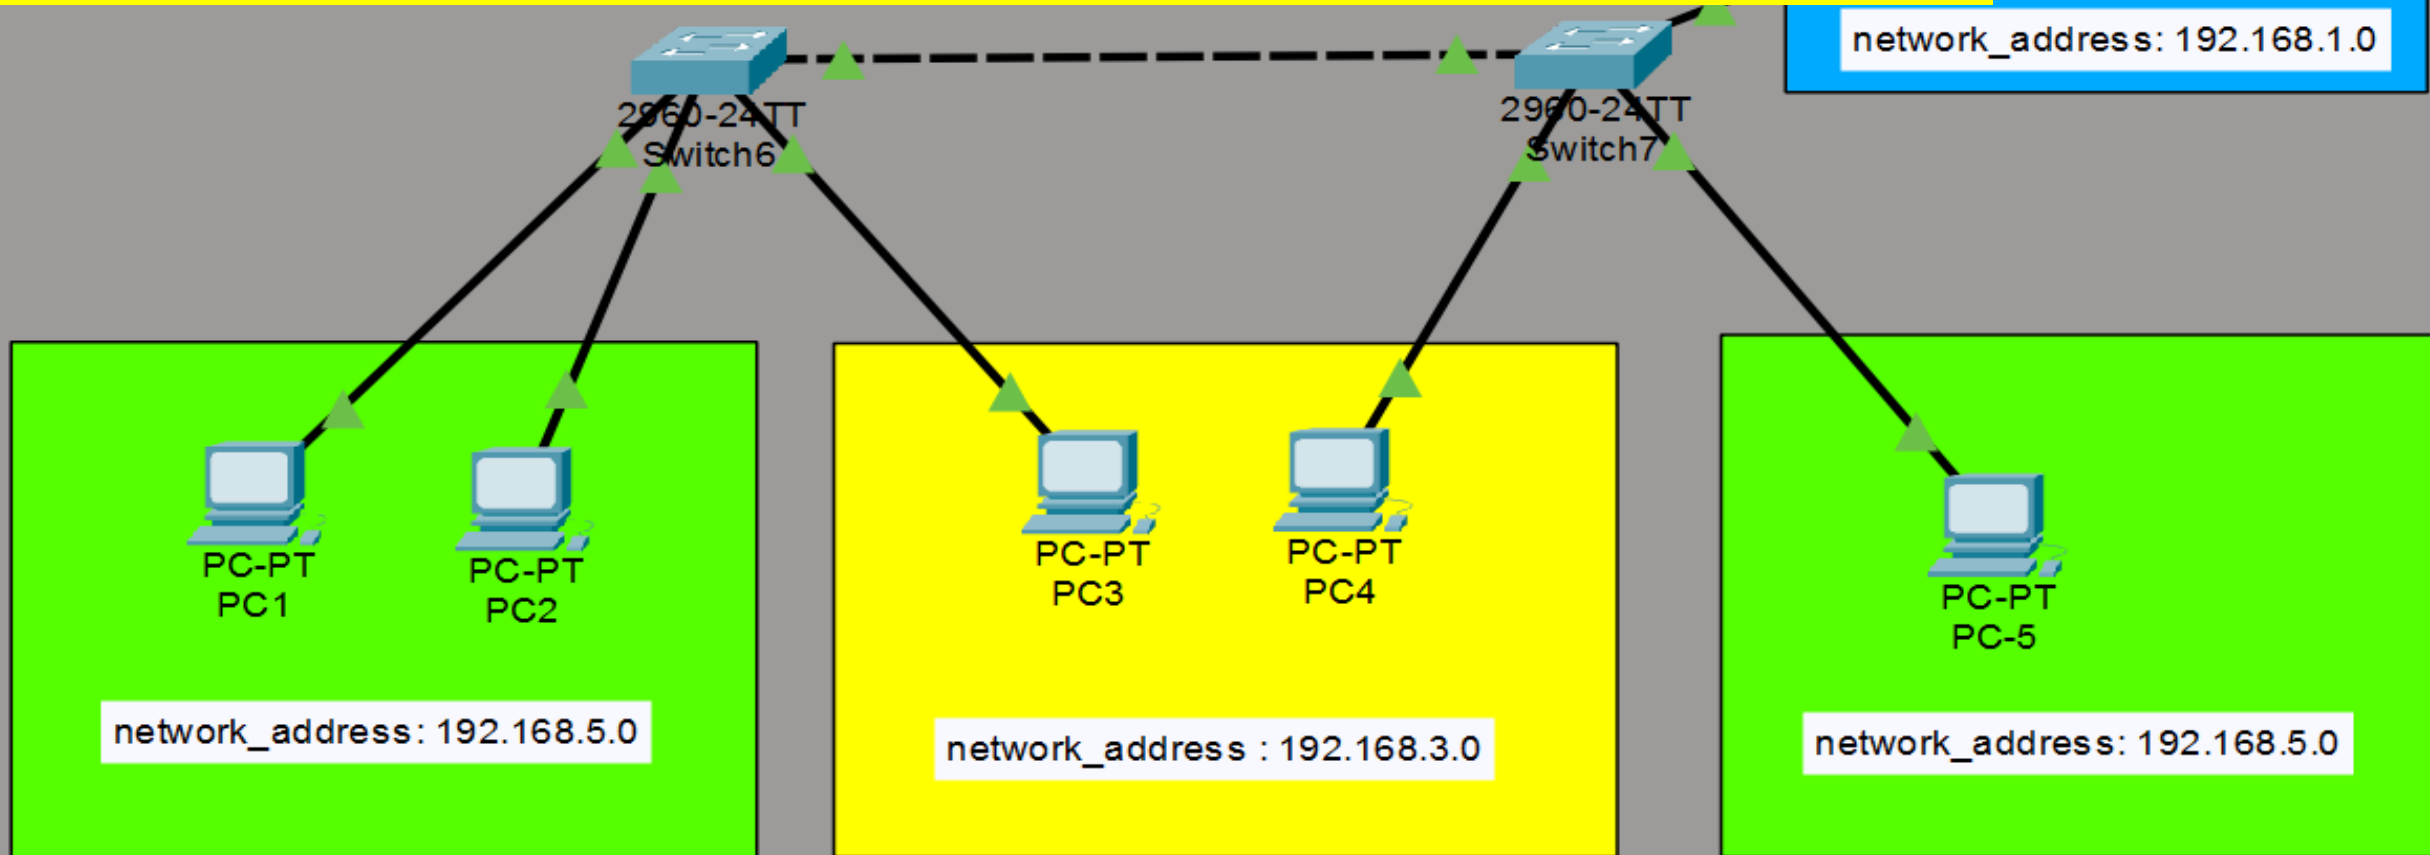

Model Answer (F)

1- Write Configuration of this network to be **fully connected**

PC1: Ip address 192.168.5.1 subnet-mask : 255.255.255.0

PC2: Ip address 192.168.5.2 subnet-mask : 255.255.255.0

PC3: Ip address 192.168.3.1 subnet-mask : 255.255.255.0

PC4: Ip address 192.168.3.2 subnet-mask : 255.255.255.0

PC5: ip address 192.168.5.3 subnet-mask : 255.255.255.0

PC6: ip address 192.168.1.1 subnet-mask : 255.255.255.0

2- Try check connection between **PC1** and **PC5** after configuration
and write the result

Result of connection : **success connection and replay**

3- Try check connection between **PC4** and **PC6** and **write the result**


Result if connection : **Request time out (connection failed)**

Model (G)

Instructions: Configure the following Network in image

1- Write Configuration of this network to be **fully connected**

2- Mention Default Gateway of **pc(2)** and **pc(0)**

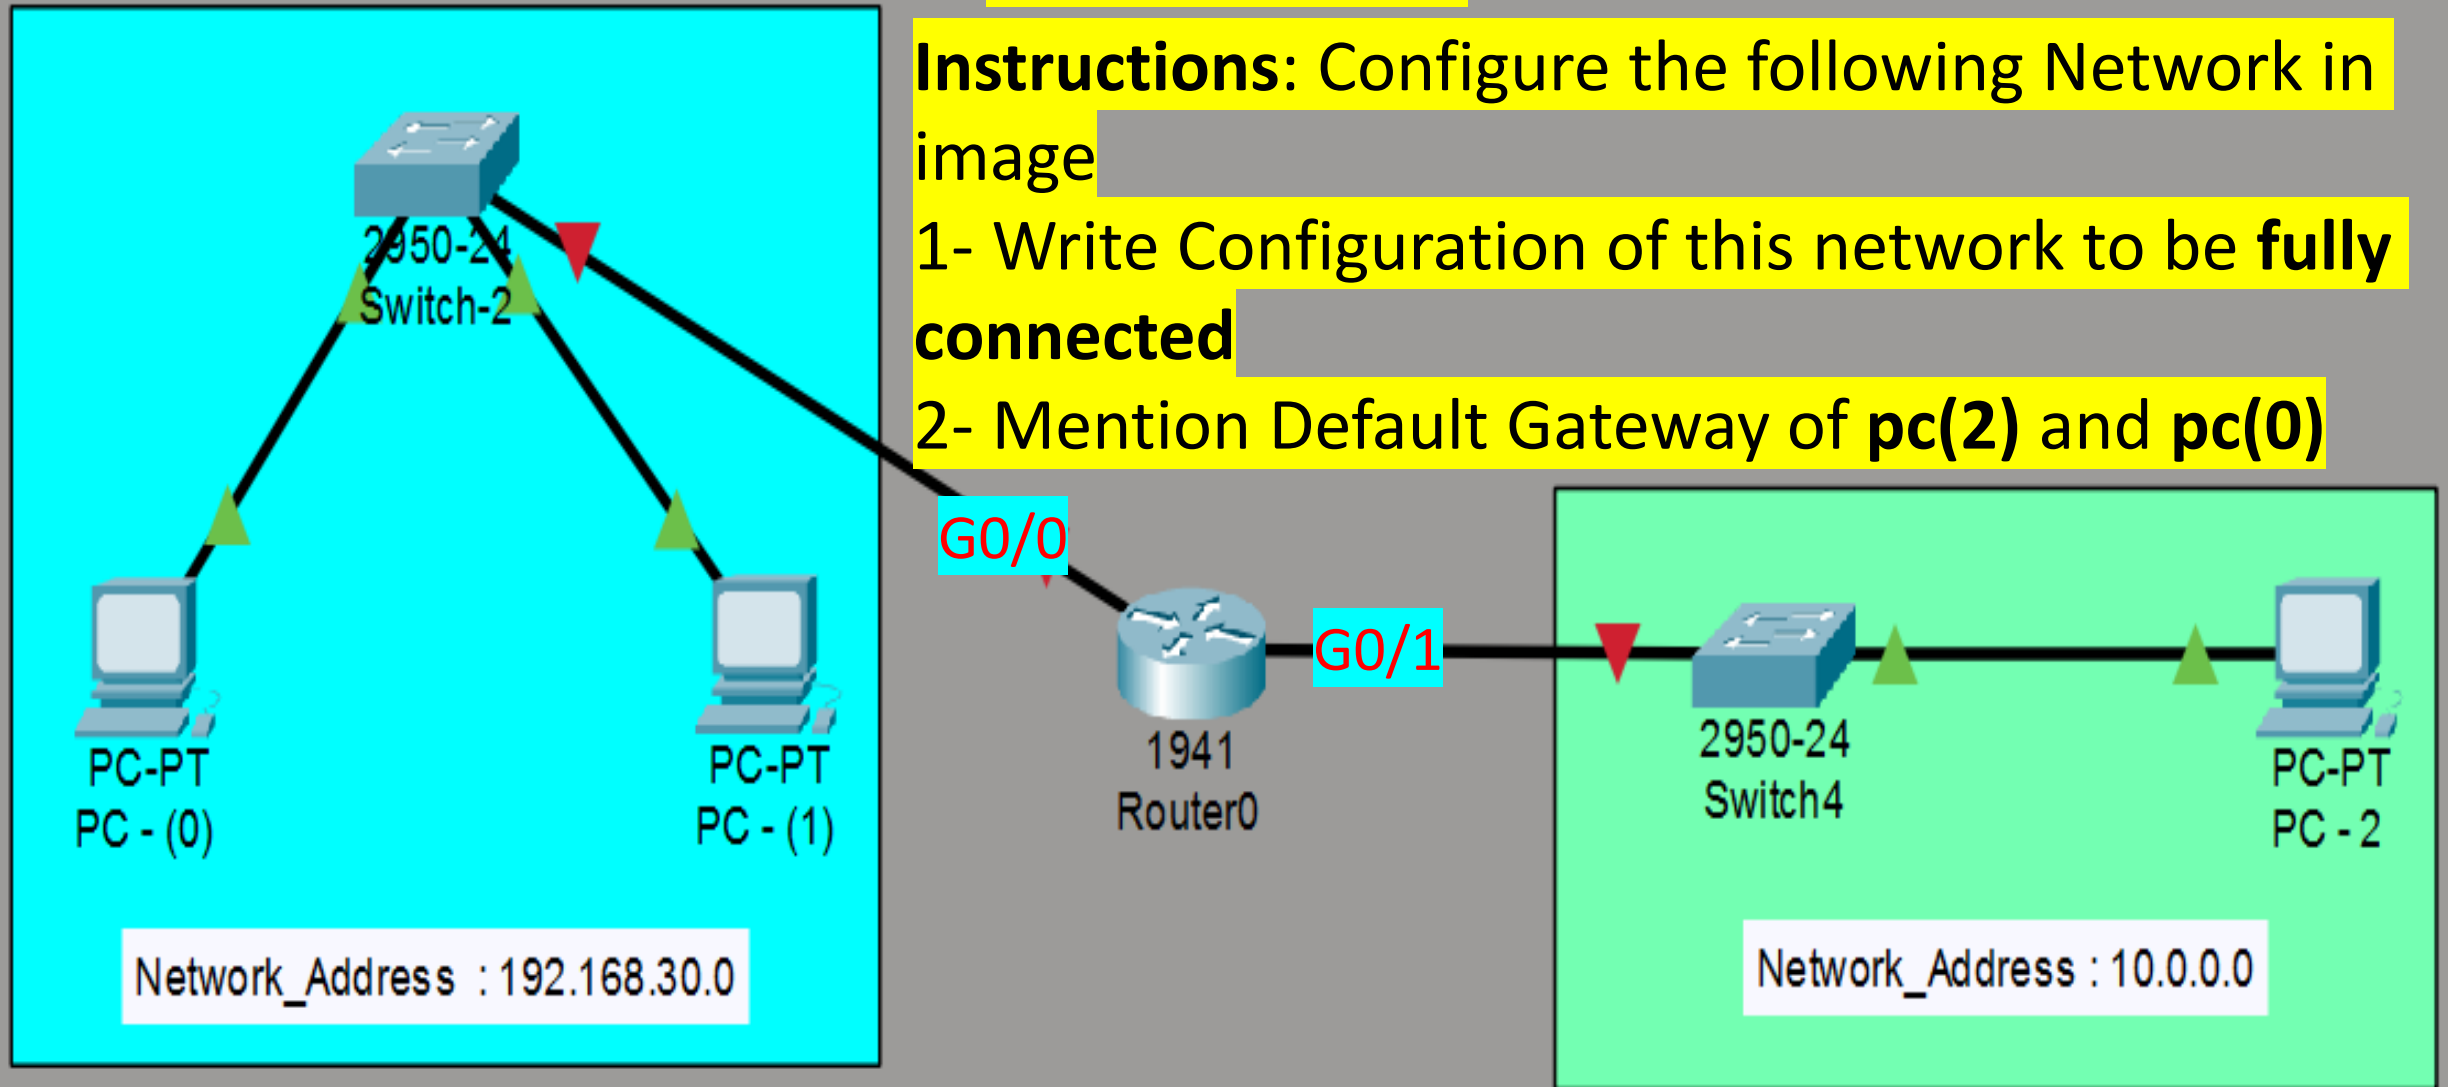

Model Answer (G)

1- Write Configuration of this network to be **fully connected**

PC0: ip address 192.168.30.2 subnet-mask : 255.255.255.0

PC1: ip address 192.168.30.3 subnet-mask : 255.255.255.0

PC2: ip address 10.0.0.2 subnet-mask 255.0.0.0

Router :

Router> en

Router# config terminal

Router(config)# interface G0/0

Router(config-if)# **ip address 192.168.30.1 255.255.255.0**

Router(config)# interface G0/1

Router(config-if)# **ip address 10.0.0.1 255.0.0.0**

2- Mention Default Gateway of **pc(2)** and **pc(0)**


PC(2) Default Gateway : **10.0.0.1**

PC(0) Default Gateway : **192.168.30.1**

Model (M)

Instructions: Configure the following Network
1- Write Configuration to Make **Static Routing**
between networks

2- Mention Default Gateway of **PC(5)** and **PC(3)**

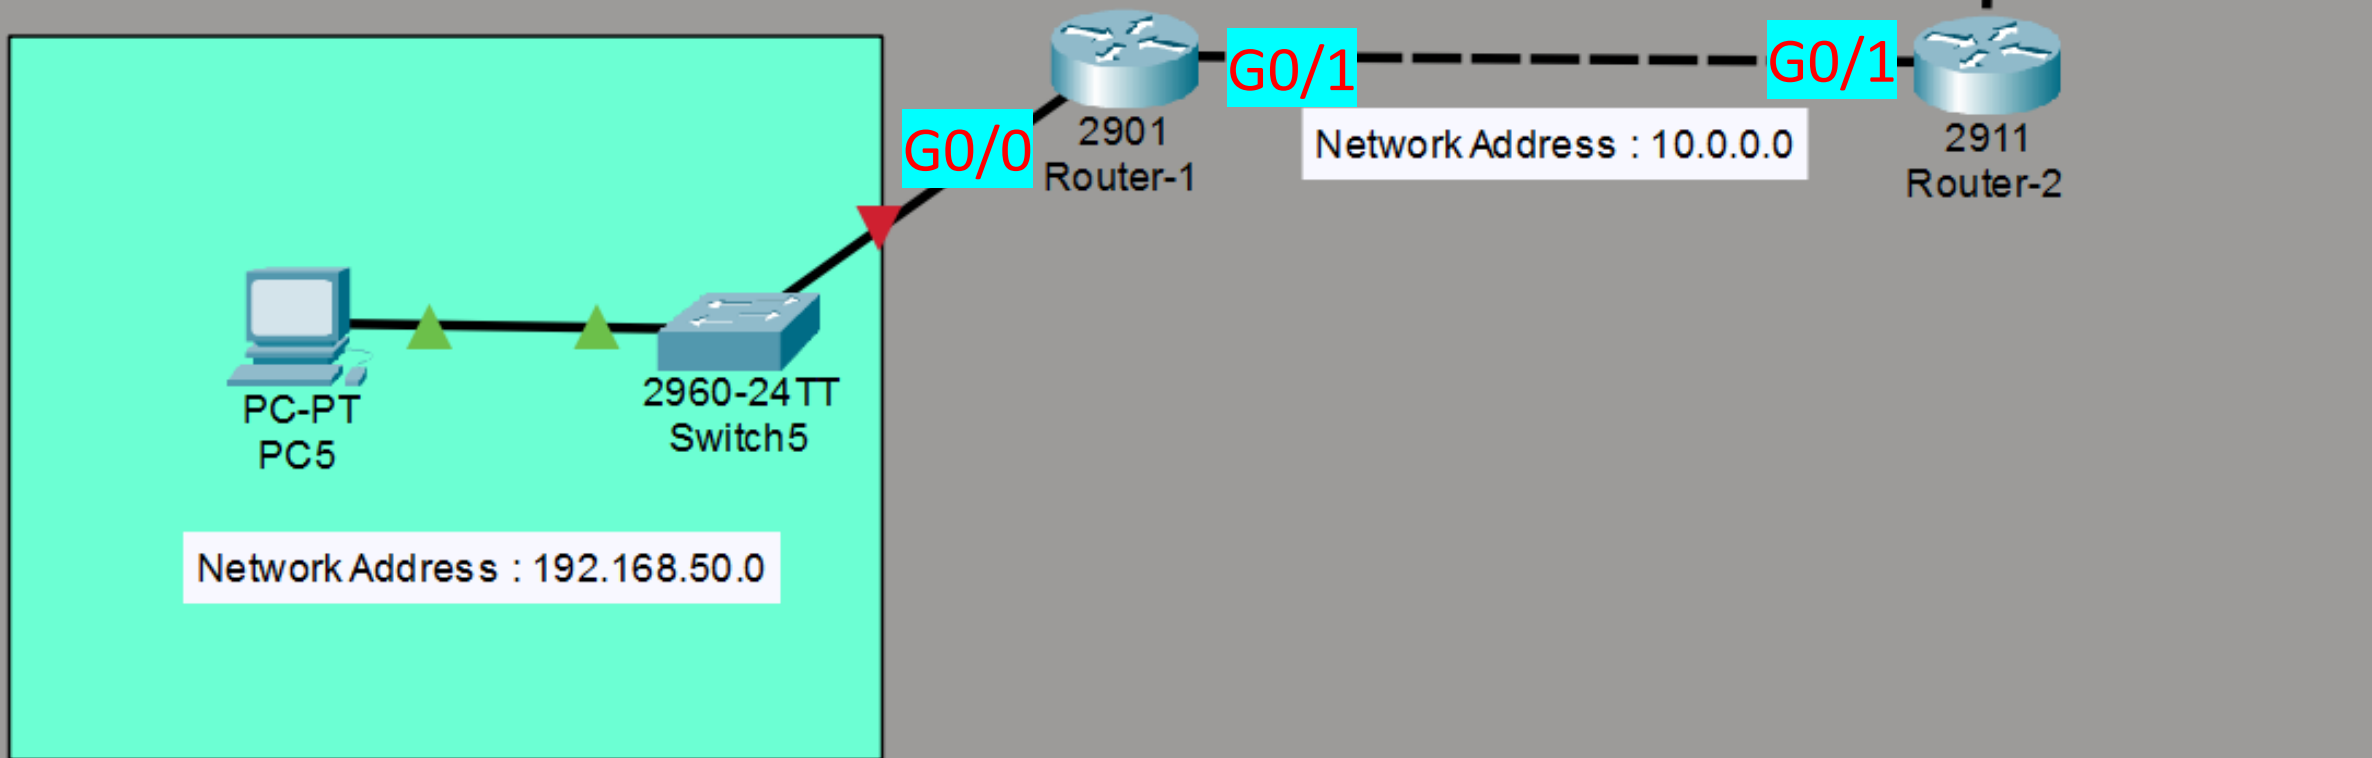

Model Answer(M)

1- Write Configuration to Make Static Routing between networks

PC5: ip address 192.168.50.2 subnet-mask 255.255.255.0

PC5: ip address 20.0.0.2 subnet-mask 255.0.0.0

Router(1):

```
Router1(config)# interface G0/0
```

```
Router1(config-if)# ip address 192.168.50.1 255.255.255.0
```

```
Router1(config-if)# interface G0/1
```

```
Router1(config-if)# ip address 10.0.0.1 255.0.0.0
```

```
Router1(config)# ip route 20.0.0.0 255.0.0.0 10.0.0.2
```

Router(2):

```
Router1(config)# interface G0/0
```

```
Router1(config-if)# ip address 20.0.0.1 255.0.0.0
```

```
Router1(config-if)# interface G0/1
```

```
Router1(config-if)# ip address 10.0.0.2 255.0.0.0
```

```
Router1(config)# ip route 192.168.50.0 255.255.255.0 10.0.0.1
```

2- Mention Default Gateway of PC(5) and PC(3)

PC(5) : Default Gateway : 192.168.50.1

PC(3) Default Gateway : 20.0.0.1