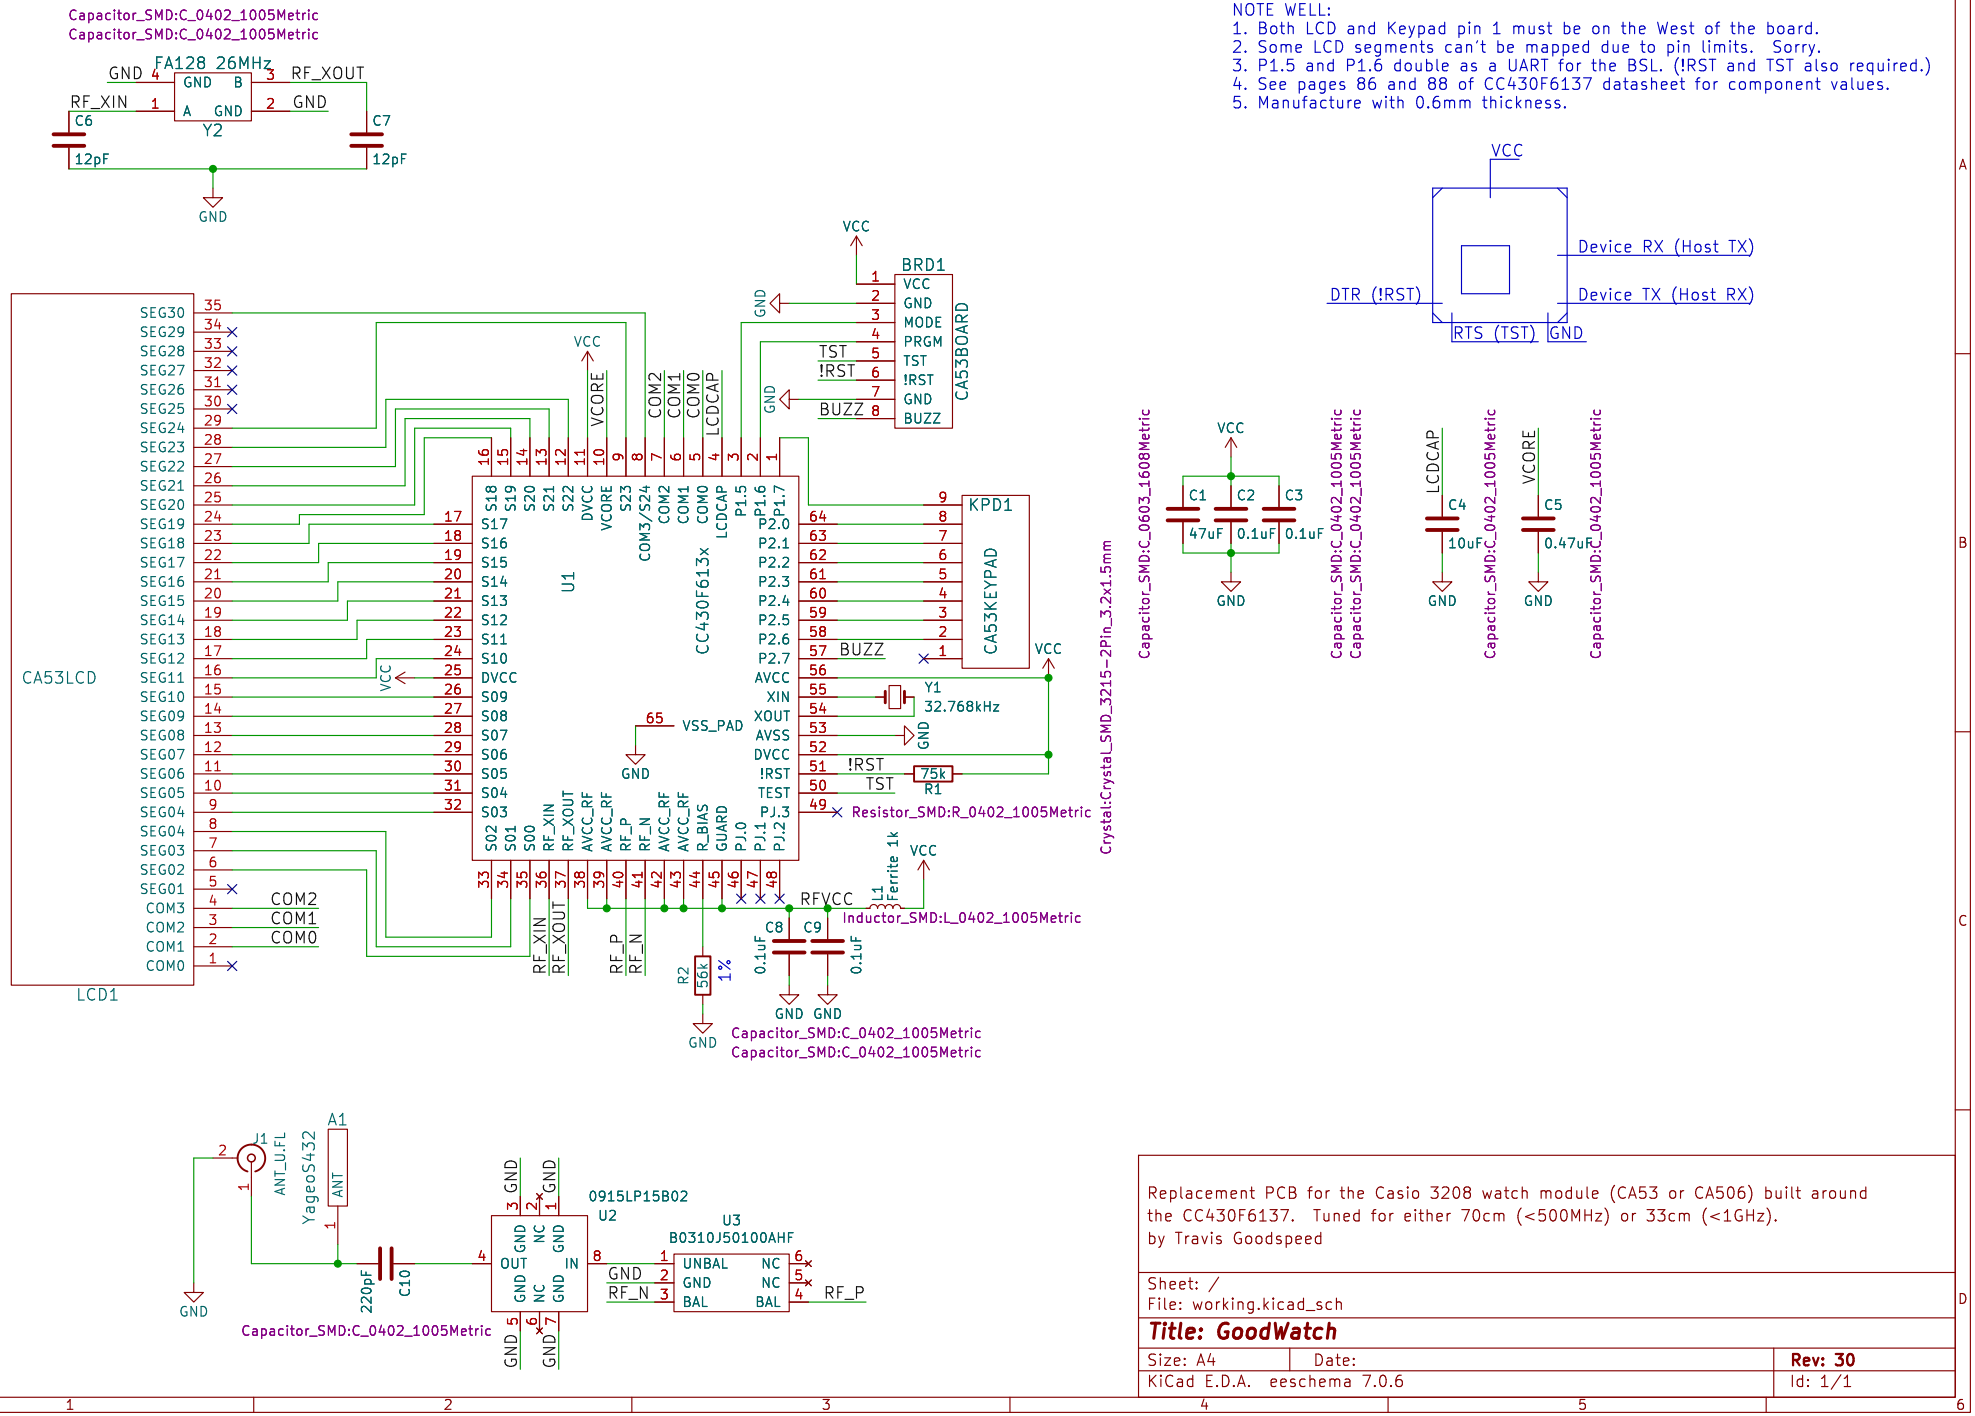
Capacitor_SMD:C_0402_1005Metric
Capacitor_SMD:C_0402_1005Metric
FA128 26MHz
GND
RF_XOUT
RF_XIN
GND
Y2
C6
C7
12pF
12pF
GND
NOTE WELL:
1. Both LCD and Keypad pin 1 must be on the West of the board.
2. Some LCD segments can't be mapped due to pin limits. Sorry.
3. P1.5 and P1.6 double as a UART for the BSL. (!RST and TST also required.)
4. See pages 86 and 88 of CC430F6137 datasheet for component values.
5. Manufacture with 0.6mm thickness.
VCC
Device RX (Host TX)
DTR (!RST)
Device TX (Host RX)
RTS (TST)
GND
BRD1
VCC
GND
MODE
PRGM
TST
!RST
GND
BUZZ
CA53BOARD
TST
!RST
BUZZ
CA53LCD
SEG30
SEG29
SEG28
SEG27
SEG26
SEG25
SEG24
SEG23
SEG22
SEG21
SEG20
SEG19
SEG18
SEG17
SEG16
SEG15
SEG14
SEG13
SEG12
SEG11
SEG10
SEG09
SEG08
SEG07
SEG06
SEG05
SEG04
SEG04
SEG03
SEG02
SEG01
COM3
COM2
COM1
COM0
LCD1
U1
CC430F613x
S17
S16
S15
S14
S13
S12
S11
S10
DVCC
S09
S08
S07
S06
S05
S04
S03
S02
S01
S00
S18
S19
S20
S21
S22
DVCC
VCORE
S23
COM3/S24
COM2
COM1
COM0
LCDCAP
P1.5
P1.6
P1.7
P2.0
P2.1
P2.2
P2.3
P2.4
P2.5
P2.6
P2.7
AVCC
XIN
XOUT
AVSS
DVCC
!RST
TEST
PJ.3
PJ.1
PJ.2
RF_XIN
RF_XOUT
AVCC_RF
AVCC_RF
RF_P
RF_N
AVCC_RF
AVCC_RF
R_BIAS
GUARD
PJ.0
KPD1
CA53KEYPAD
BUZZ
VCC
Y1
32.768kHz
GND
65
VSS_PAD
GND
!RST
TST
75k
R1
Resistor_SMD:R_0402_1005Metric
Crystal:Crystal_SMD_3215-2Pin_3.2x1.5mm
VCC
Ferrite 1k
L1
RFVCC
Inductor_SMD:L_0402_1005Metric
C8
C9
0.1uF
0.1uF
R2
56k
1%
GND
GND
GND
Capacitor_SMD:C_0402_1005Metric
Capacitor_SMD:C_0402_1005Metric
VCC
C1
C2
C3
47uF
0.1uF
0.1uF
GND
Capacitor_SMD:C_0603_1608Metric
Capacitor_SMD:C_0402_1005Metric
Capacitor_SMD:C_0402_1005Metric
LCDCAP
C4
10uF
GND
Capacitor_SMD:C_0402_1005Metric
VCORE
C5
0.47uF
GND
Capacitor_SMD:C_0402_1005Metric
J1
ANT_U.FL
A1
YageoS432
ANT
GND
220pF
C10
Capacitor_SMD:C_0402_1005Metric
0915LP15B02
U2
GND
NC
GND
OUT
IN
GND
NC
GND
GND
GND
U3
B0310J50100AHF
UNBAL
NC
GND
NC
BAL
BAL
GND
RF_N
RF_P
Replacement PCB for the Casio 3208 watch module (CA53 or CA506) built around
the CC430F6137. Tuned for either 70cm (<500MHz) or 33cm (<1GHz).
by Travis Goodspeed
Sheet: /
File: working.kicad_sch
Title: GoodWatch
Size: A4
Date:
Rev: 30
KiCad E.D.A. eeschema 7.0.6
Id: 1/1