


Maximum voltage: 24 V (5s BMS)
Maximum current: 50 A continuous, 100 A peak

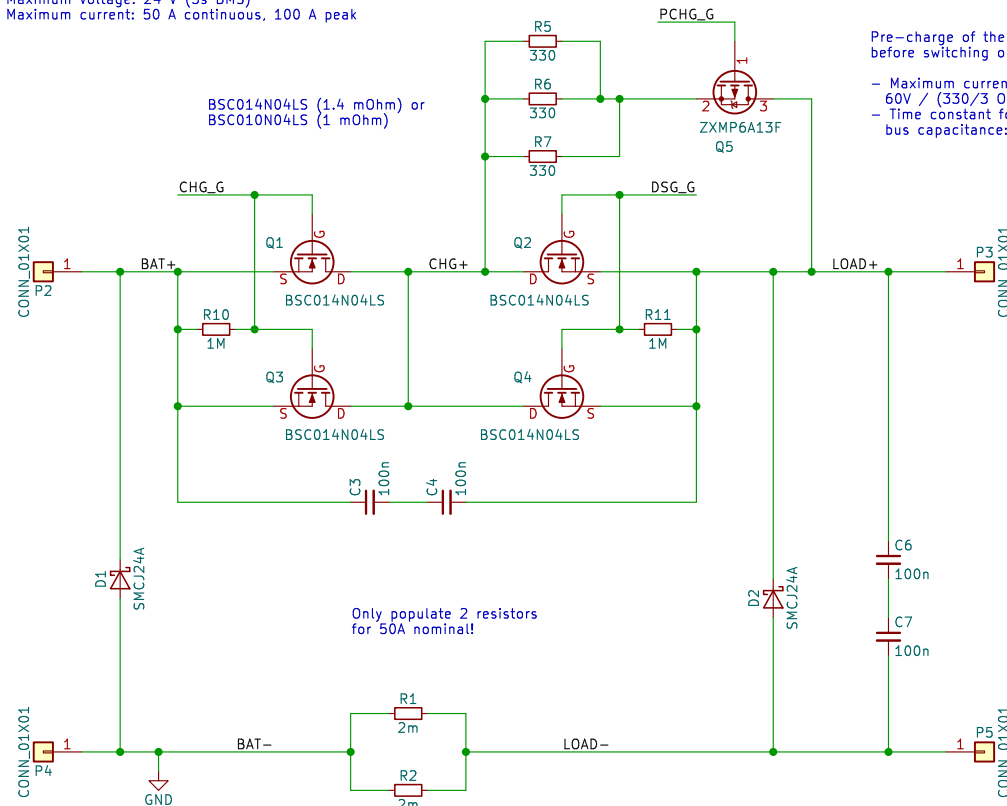

BSC014N04LS (1.4 mOhm) or
BSC010N04LS (1 mOhm)

Pre-charge of the bus
before switching on DSG



– Maximum current:
 $60V / (330/3 \text{ Ohm}) = 0.55A$
– Time constant for $1000\mu F$
bus capacitance: 0.1s

Only populate 2 resistors
for 50A nominal!

Take resistor with low temperature coefficient and
3W thermal rating, e.g.:
Bourns CRE2512-FZ-R001E-3 (75 ppm/K, 3W, 1%)

Max. C_{iss} of CSD18540Q5B = 4.23 nF

Necessary CP capacity acc. datasheet:
 $4 \times 4.23 \text{ nF} \times 470/20 = 0.4 \mu F$

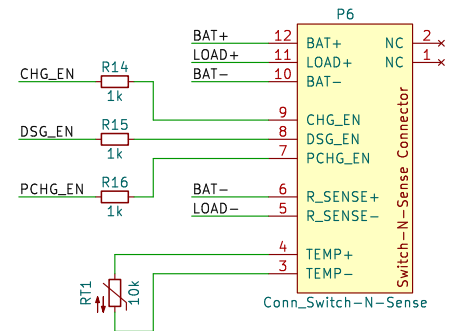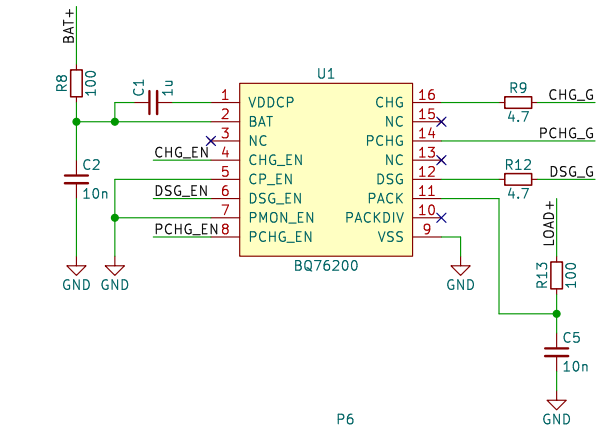

Sheet: /
File: working.kicad_sch

Title:

Size: A4

Date:

KiCad E.D.A. eeschema 7.0.6

Rev: 0.2

Id: 1/1