


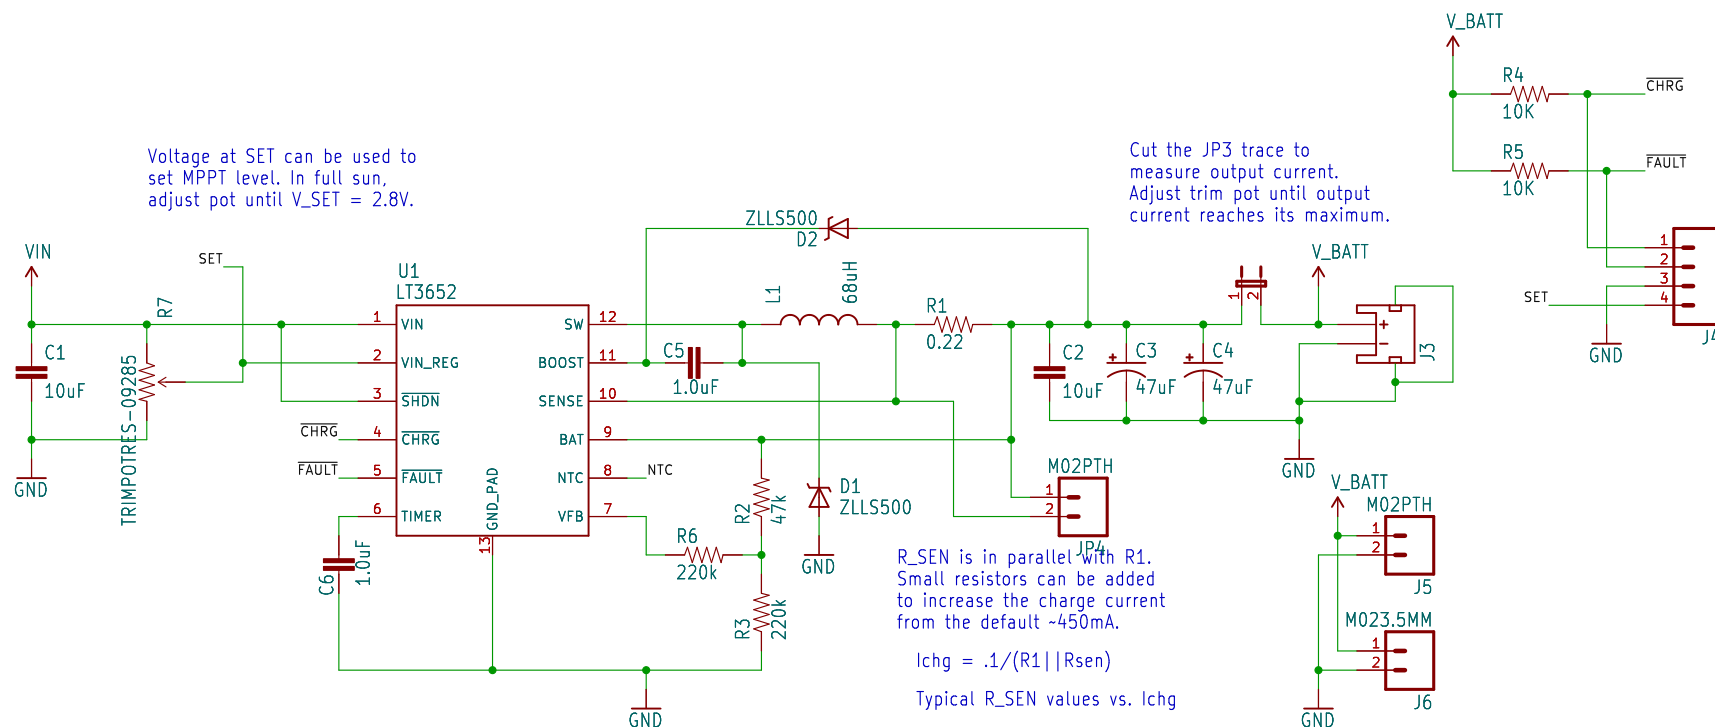

Voltage at SET can be used to set MPPT level. In full sun, adjust pot until V_SET = 2.8V.

Cut the JP3 trace to measure output current. Adjust trim pot until output current reaches its maximum.

R_SEN is in parallel with R1. Small resistors can be added to increase the charge current from the default ~450mA.

$$I_{chg} = .1 / (R1 || R_{sen})$$

Typical R_SEN values vs. I_chg

1.0 -> 550mA
0.5 -> 650mA
0.33 -> 750mA
0.22 -> 800mA

To add a second bank of solar cells, short JP2 and clear JP1.
NB: With both JP1 and JP2 shorted, the second power input is also shorted-
{This} may result in damage to your power source.
You've been warned



Released under the Creative Commons Attribution Share-Alike 3.0 License http://creativecommons.org/licenses/by-sa/3.0	
TITLE: \${PROJECTNAME}	
Design by: M. Hord	REV: v13
Date: \${CURRENT_DATE}	Sheet: \${#}/\${##}